

DELTA RL3-1200-3kg

Article number: AL_10005



lean line


Description:

This type of robot is based on the principle of parallel kinematics. All drives are mounted in a fixed position on the robot head. Motor cables are not moved. The robot has three (3) translational degrees of freedom. This robot mechanics is characterized by its attractive pricing. Due to the joint design, the nominal payload is limited and the average performance and/or lifetime is reduced compared to classic autonox mechanics. The robot is delivered in pre-assembled main assemblies to save space.

Scope of delivery:

Robot mechanics incl. gearbox, Servo motor adapter, Threaded protection caps, Transport and packing instructions

Connecting dimensions:

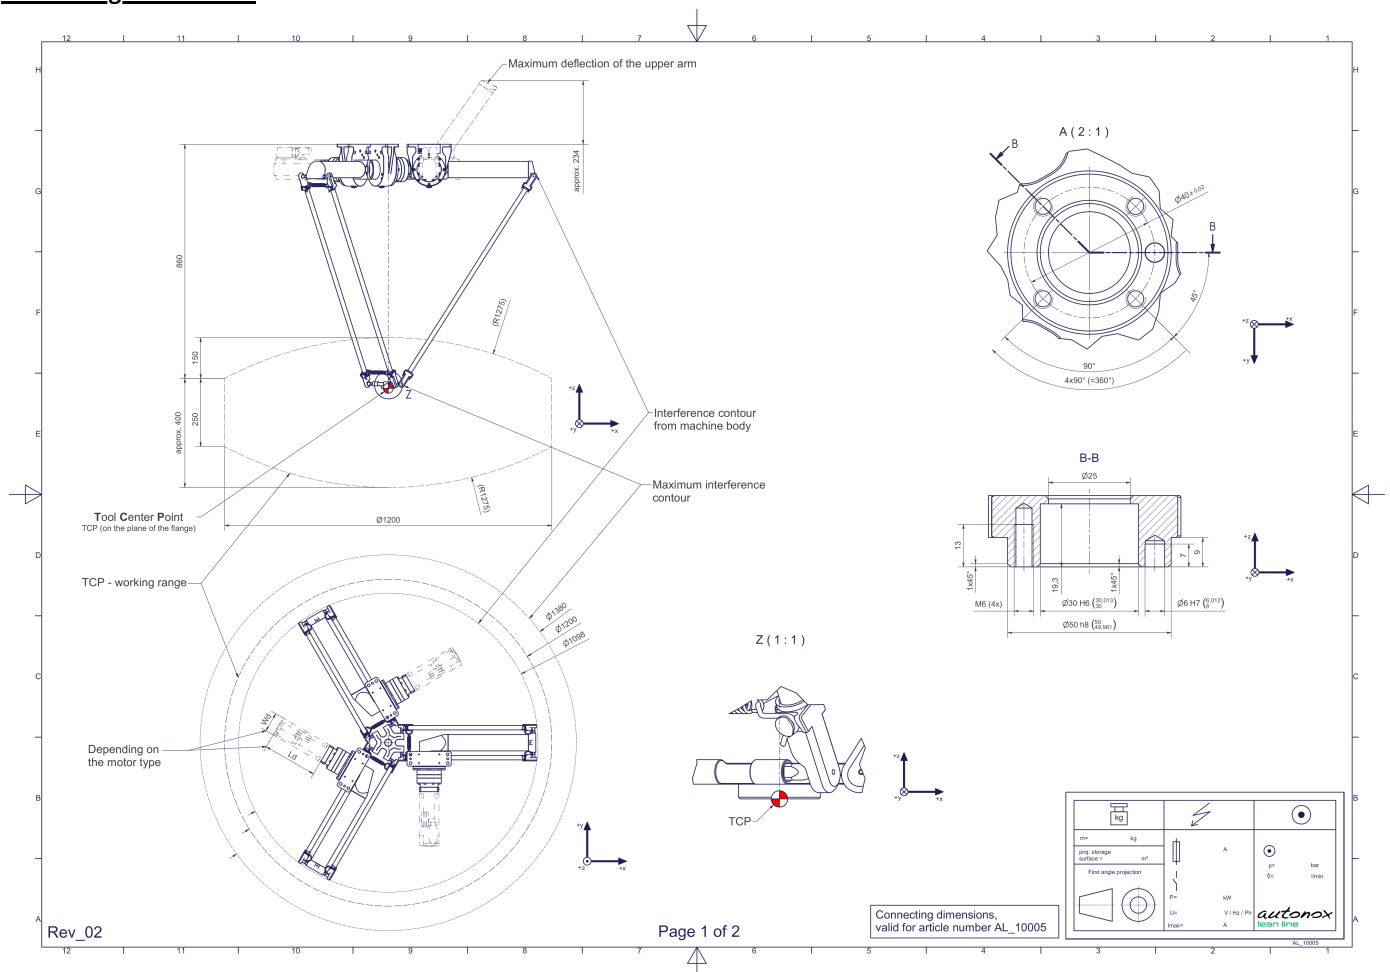

Downloads: [Connecting dimensions \(PDF\)](#), [3D model \(STP\)](#), [3D model \(PDF\)](#)

We refer to our [General Terms of Sale and Supply](#), [Terms of use](#) and [Disclaimer and Copyright notices](#).

Technical specifications:

| | |
|---|--|
| Field of application | Standard (not hygienic) |
| Kinematics | Parallel |
| Translatory Degrees of Freedom (X,Y,Z) | 3 |
| Rotational Degrees of Freedom (α, β, γ) | 0 |
| Nominal payload [kg lbs] * | 3 6.6 |
| Working area-diameter [mm in] | 1200 47.2 |
| Working height outside [mm in] | 250 9.8 |
| Working height center [mm in] | 400 15.7 |
| Bearing type of the arm joints | Journal bearing |
| Lubricants of the gearboxes | Food-grade (FO) |
| Cleaning | No high pressure |
| Ambient temperature [°C °F] | 0 to +40 +32 to +104 |
| Relative humidity level [%] | 95 (free of condensation) |
| Mounting position | Floor, Ceiling, Wall (on request), Angle (on request) |
| Special features | The head plate is not included in the scope of delivery, i.e. the gearbox supports have to be attached directly to the machine frame. Advantages: Compact, inexpensive |

* All given values are nominal values (nominal payload referred to a nominal performance) and can vary under realworld conditions depending on the application (tool specifications, load distances, reduction (partly) of the nominal performance when using food-grade lubricants, ...). Please consider our technical data sheets regarding the load capacity.

Gearbox article number for this robot mechanics:

| Function | Article number | Document |
|-------------------------|----------------------|---------------------------------------|
| Drive of the upper arms | MT_WST00108764-xx-FO | Operating manual gearbox type 3 (PDF) |