

Product data sheet https://autonoxfinder.com/en/A_00066-01

Date of download: Nov 30, 2025 Time of download: 02:20 UTC

DELTA RL3-1600-20kg

Article number: A_00066-01

Lubricant variant: Synthetic lubricants




Description:

This type of robot is based on the principle of parallel kinematics. All drives are mounted in a fixed position on the robot head. Motor cables are not moved. The robot has three (3) translational degrees of freedom.

Scope of delivery:

Robot mechanics incl. gearbox, Servo motor adapter, Threaded protection caps, Transport and packing instructions

Connecting dimensions:

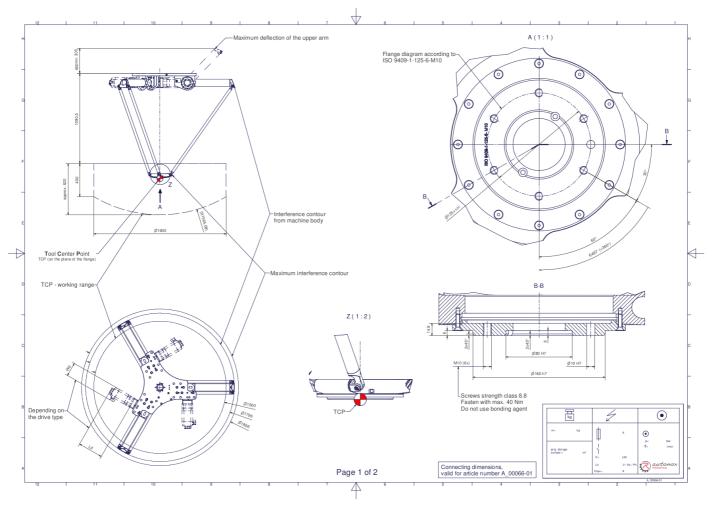

<u>Downloads:</u> <u>Connecting dimensions (PDF)</u> <u>3D model (STP)</u> <u>3D model (PDF)</u>



Product data sheet https://autonoxfinder.com/en/A_00066-01

Date of download: Nov 30, 2025 Time of download: 02:20 UTC

Technical specifications:

Field of application	Standard (not hygienic)	
Kinematics	Parallel	
Translatory Degrees of Freedom (X,Y,Z)	3	
Rotational Degrees of Freedom (α,β,γ)	0	
Nominal payload [kg lbs] *	20 44.1	
Working area-diameter [mm in]	1600 63.0	
Working height outside [mm in]	400 15.7	
Working height center [mm in]	620 24.4	
Bearing type of the arm joints	Roller bearing	
Lubricants of the bearings	Synthetic	
Lubricants of the gearboxes	Synthetic	
Cleaning	No high pressure	
Ambient temperature [°C °F]	0 to +40 +32 to +104	
Relative humidity level [%]	95 (free of condensation)	
Mounting position	Floor, Ceiling, Wall (on request), Angle (on request)	

^{*} All given values are nominal values (nominal payload referred to a nominal performance) and can vary under realworld conditions depending on the application (tool specifications, load distances, reduction (partly) of the nominal performance when using food-grade lubricants, ...). Please consider our technical data sheets regarding the load capacity.

Gearbox article number for this robot mechanics:

Function	Article number	Document
Drive of the upper arms	MT_BGR00017292-U-xx	Operating manual gearbox type 3 (PDF)