

## Product data sheet <a href="https://autonoxfinder.com/en/A\_00084-01">https://autonoxfinder.com/en/A\_00084-01</a>

Date of download: Oct 17, 2025 Time of download: 19:41 UTC

### DELTA RL4-800-1kg

Article number: A\_00084-01

Lubricant variant: Synthetic lubricants




#### **Description:**

This type of robot is based on the principle of parallel kinematics. All drives are mounted in a fixed position on the robot head. Motor cables are not moved. The robot has three (3) translational and one (1) rotational degree(s) of freedom.

#### **Scope of delivery:**

Robot mechanics incl. gearbox, Servo motor adapter, Threaded protection caps, Transport and packing instructions

#### **Connecting dimensions:**

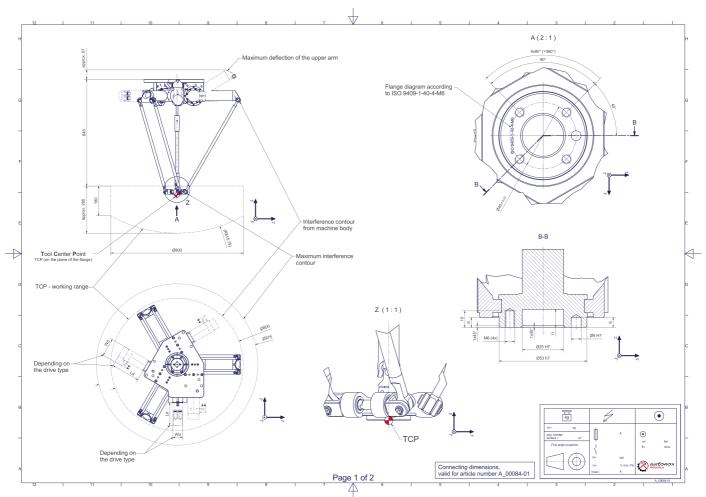

<u>Downloads:</u> <u>Connecting dimensions (PDF)</u> <u>3D model (STP)</u> <u>3D model (PDF)</u>



# Product data sheet https://autonoxfinder.com/en/A\_00084-01

Date of download: Oct 17, 2025 Time of download: 19:41 UTC

#### **Technical specifications:**

| Field of application  | Standard (not hygienic)   |
|---|---|
| Kinematics  | Parallel  |
| Translatory Degrees of Freedom (X,Y,Z)  | 3   |
| Rotational Degrees of Freedom $(\alpha,\beta,\gamma)$                         | 1   |
| Nominal payload [kg lbs] *  | 1   2.2   |
| Working area-diameter [mm in]   | 800   31.5  |
| Working height outside [mm in]  | 180   7.1   |
| Working height center [mm in]   | 285   11.2  |
| Max. acceleration torque of the rotation y around Z at the output [Nm in.lbs] | 7,2   63.7  |
| Nominal torque of the rotation y around Z at the output [Nm in.lbs]           | 7,2   63.7  |
| Max. speed of the rotation y around Z at the output [1/min]                   | 500   |
| Nominal speed of the rotation y around Z at the output [1/min]                | 320   |
| Bearing type of the telescopic shaft(s)                                       | Roller bearing  |
| Bearing type of the arm joints  | Roller bearing  |
| Lubricants of the bearings  | Synthetic   |
| Lubricants of the gearboxes   | Synthetic   |
| Cleaning  | No high pressure  |
| Ambient temperature [°C °F]   | 0 to +40   +32 to +104  |
| Relative humidity level [%]   | 95 (free of condensation)   |
| Mounting position   | Floor, Ceiling, Wall (on request), Angle (on request)   |
| Robot weight without drive engineering (esp. drive) [kg lbs]                  | 26   57.3   |
| Special features  | All drives (gearbox, reduction gearing,) are located below the head plate. Advantages: Easily accessible, easy to maintain, compact |

<sup>\*</sup> All given values are nominal values (nominal payload referred to a nominal performance) and can vary under realworld conditions depending on the application (tool specifications, load distances, reduction (partly) of the nominal performance when using food-grade lubricants, ...). Please consider our technical data sheets regarding the load capacity.

#### **Gearbox article number for this robot mechanics:**

| Function  | Article number    | Document                              |
|---|-------------------|---------------------------------------|
| Drive of the upper arms                               | MT_BGR00009592-xx | Operating manual gearbox type 3 (PDF) |
| Drive of the telescopic shaft for rotation y around Z | MT_BGR00011502-xx | Operating manual gearbox type 1 (PDF) |