


DuoPod RV2-T1-1000-40kg

Article number: A_00093-T1

Lubricant variant: Synthetic lubricants

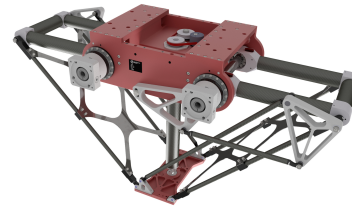


Description:

This type of robot is based on the principle of parallel kinematics. All drives are mounted in a fixed position on the robot head. Motor cables are not moved. The robot has two (2) translational degrees of freedom.

Scope of delivery:

Robot mechanics incl. gearbox, Servo motor adapter, Threaded protection caps, Transport and packing instructions

Connecting dimensions:

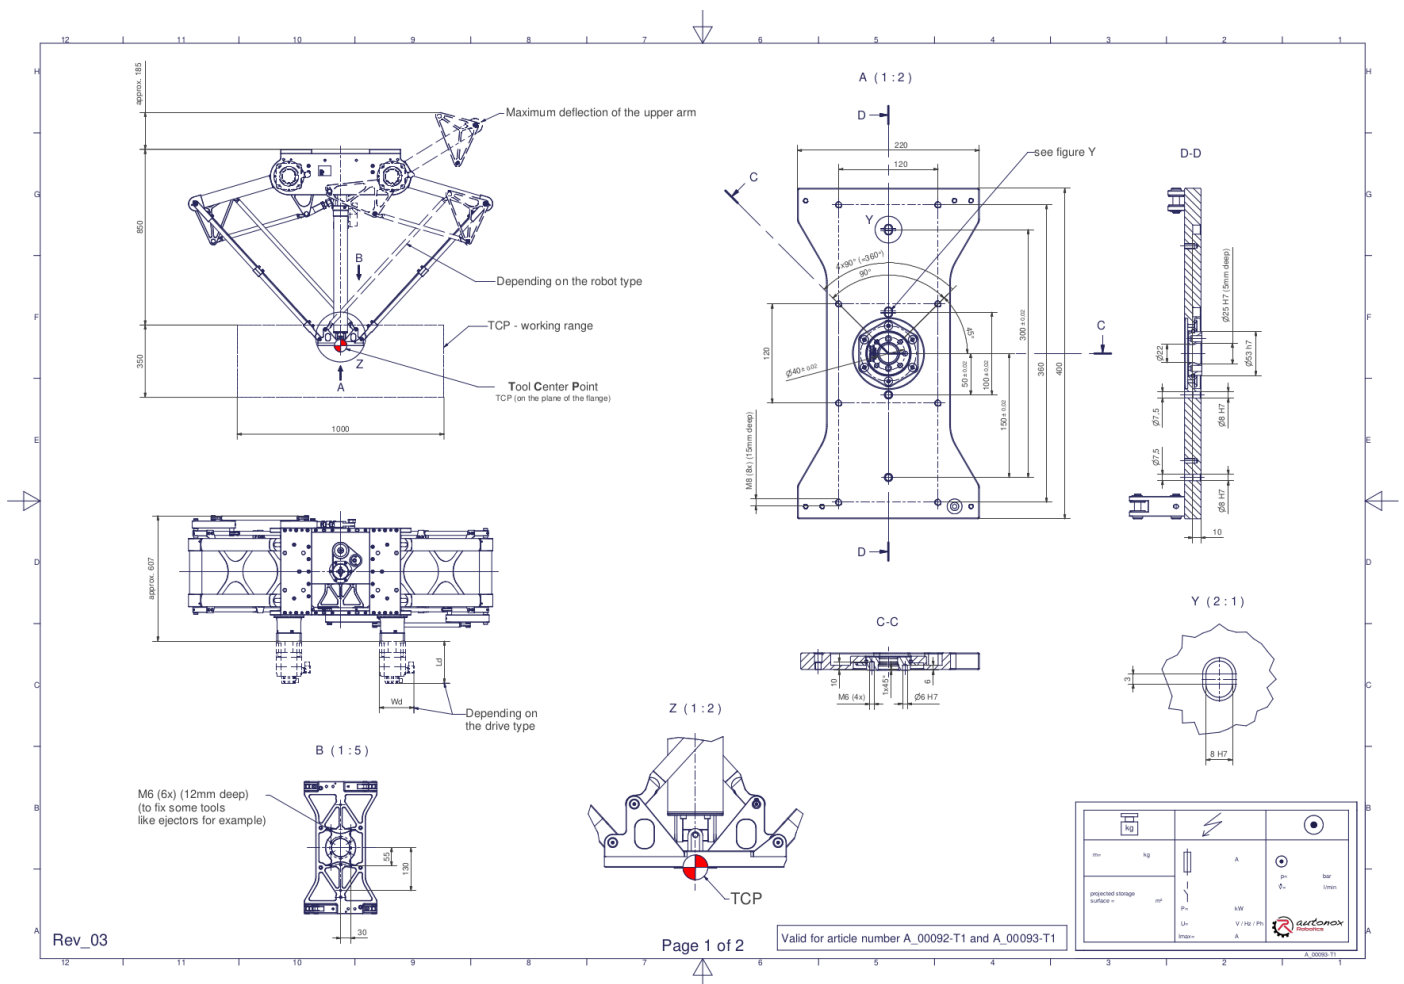

Downloads: [Connecting dimensions \(PDF\)](#), [3D model \(STP\)](#), [3D model \(PDF\)](#)

We refer to our [General Terms of Sale and Supply](#), [Terms of use](#) and [Disclaimer and Copyright notices](#).

Technical specifications:

| | |
|--|---|
| Field of application | Standard (not hygienic) |
| Kinematics | Parallel |
| Translatory Degrees of Freedom (X,Y,Z) | 2 |
| Rotational Degrees of Freedom (α, β, γ) | 0 |
| Nominal payload [kg lbs] * | 40 88.2 |
| Working area-width [mm in] | 1000 39.4 |
| Working height outside [mm in] | 350 13.8 |
| Output type of the tool actuation | Flange (T) |
| Number of the tool actuation (telescopic shaft(s)) | 1 |
| Max. acceleration torque of the tool actuation T/TS1 at the output [Nm in.lbs] | 10 88.5 |
| Nominal torque of the tool actuation T/TS1 at the output [Nm in.lbs] | 10 88.5 |
| Max. speed of the tool actuation T/TS1 at the output [1/min] | 1500 |
| Nominal speed of the tool actuation T/TS1 at the output [1/min] | 660 |
| Bearing type of the telescopic shaft(s) | Journal bearing |
| Bearing type of the arm joints | Roller bearing |
| Lubricants of the bearings | Synthetic |
| Lubricants of the gearboxes | Synthetic |
| Cleaning | No high pressure |
| Ambient temperature [°C °F] | 0 to +40 +32 to +104 |
| Relative humidity level [%] | 95 (free of condensation) |
| Mounting position | Floor, Ceiling, Wall (on request), Angle (on request) |
| Robot weight without drive engineering (esp. drive) [kg lbs] | 76 167.6 |

* All given values are nominal values (nominal payload referred to a nominal performance) and can vary under realworld conditions depending on the application (tool specifications, load distances, reduction (partly) of the nominal performance when using food-grade lubricants, ...). Please consider our technical data sheets regarding the load capacity.

Gearbox article number for this robot mechanics:

| Function | Article number | Document |
|--|---------------------|---------------------------------------|
| Drive of the upper arms | MT_BGR00017292-U-xx | Operating manual gearbox type 3 (PDF) |
| Drive of the telescopic shaft for tool actuation T/TS1 | MT_BGR00015117-xx | Operating manual gearbox type 5 (PDF) |

We refer to our [General Terms of Sale and Supply](#), [Terms of use](#) and [Disclaimer and Copyright notices](#).