


HHD DuoPod RVS3-T1-400-12kg

Article number: A_00099-T1

Lubricant variant: Synthetic lubricants




Description:

This type of robot is based on the principle of parallel kinematics. All drives are mounted in a fixed position on the robot head. Motor cables are not moved. The robot has two (2) translational and one (1) rotational degree(s) of freedom.

Scope of delivery:

Robot mechanics incl. gearbox, Servo motor adapter, Transport and packing instructions

Connecting dimensions:

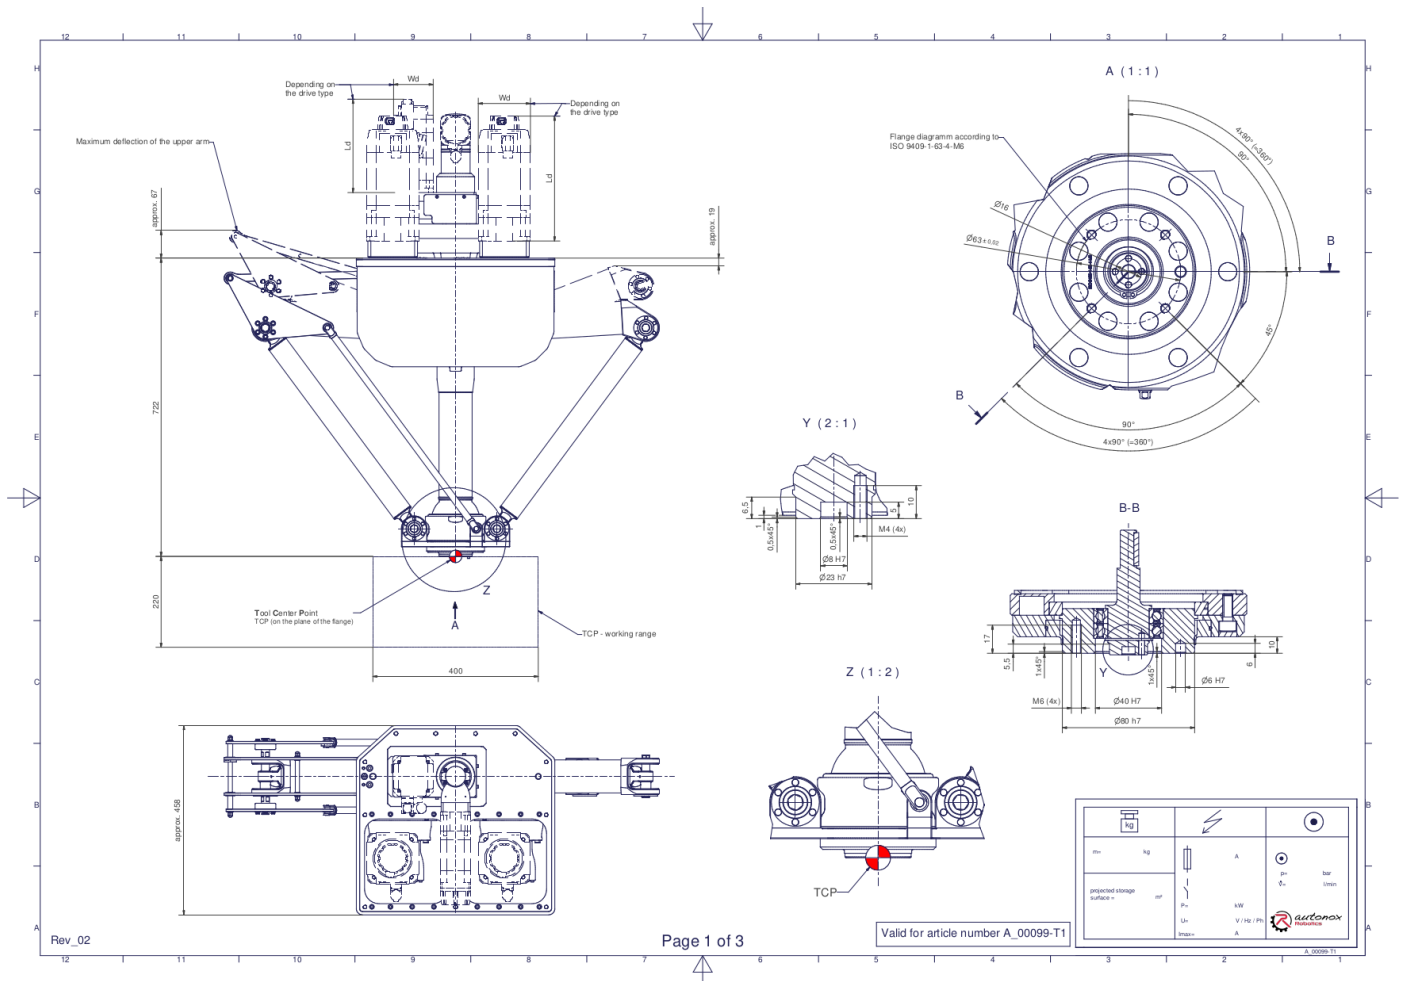

Downloads: [Connecting dimensions \(PDF\)](#), [3D model \(STP\)](#), [3D model \(PDF\)](#)

We refer to our [General Terms of Sale and Supply](#), [Terms of use](#) and [Disclaimer and Copyright notices](#).

Technical specifications:

| | |
|--|--|
| Field of application | Hygienic 'HHD' |
| Kinematics | Parallel |
| Translatory Degrees of Freedom (X,Y,Z) | 2 |
| Rotational Degrees of Freedom (α, β, γ) | 1 |
| Nominal payload [kg lbs] * | 12 26.5 |
| Working area-width [mm in] | 400 15.7 |
| Working height outside [mm in] | 220 8.7 |
| Output type of the tool actuation | Flange (T) |
| Number of the tool actuation (telescopic shaft(s)) | 1 |
| Max. acceleration torque of the rotation γ around Z at the output [Nm in.lbs] | 110 973.6 |
| Nominal torque of the rotation γ around Z at the output [Nm in.lbs] | 110 973.6 |
| Max. speed of the rotation γ around Z at the output [1/min] | 260 |
| Nominal speed of the rotation γ around Z at the output [1/min] | 160 |
| Max. acceleration torque of the tool actuation T/TS1 at the output [Nm in.lbs] | 13,1 115,9 |
| Nominal torque of the tool actuation T/TS1 at the output [Nm in.lbs] | 13,1 115,9 |
| Max. speed of the tool actuation T/TS1 at the output [1/min] | 450 |
| Nominal speed of the tool actuation T/TS1 at the output [1/min] | 300 |
| Bearing type of the telescopic shaft(s) | Roller bearing |
| Bearing type of the arm joints | Roller bearing |
| Lubricants of the bearings | Food-grade (FO) |
| Lubricants of the gearboxes | Synthetic |
| Cleaning | Up to 28 bar 406 psi high pressure |
| Protection class | IP69K |
| Ambient temperature [°C °F] | 0 to +40 +32 to +104 |
| Relative humidity level [%] | 95 (free of condensation) |
| Mounting position | Ceiling, Wall (on request), Angle (on request) |
| Robot weight without drive engineering (esp. drive) [kg lbs] | 146 321.9 |

* All given values are nominal values (nominal payload referred to a nominal performance) and can vary under realworld conditions depending on the application (tool specifications, load distances, reduction (partly) of the nominal performance when using food-grade lubricants, ...). Please consider our technical data sheets regarding the load capacity.

Gearbox article number for this robot mechanics:

| Function | Article number | Document |
|--|-------------------|---------------------------------------|
| Drive of the upper arms | MT_BGR00021815-xx | Operating manual gearbox type 3 (PDF) |
| Drive of the telescopic shaft for rotation γ around Z | MT_WST00064258-xx | Operating manual gearbox type 7 (PDF) |
| Drive of the telescopic shaft for tool actuation T/TS1 | MT_BGR00013360-xx | Operating manual gearbox type 1 (PDF) |