

## Product data sheet https://autonoxfinder.com/en/A\_00816-FO

Date of download: Nov 4, 2025 Time of download: 00:26 UTC

### **DELTA RL5-1450-12kg**

Article number: A\_00816-FO

**Lubricant variant:** Food-grade lubricants (FO)




#### **Description:**

This type of robot is based on the principle of parallel kinematics. All drives are mounted in a fixed position on the robot head. Motor cables are not moved. The robot has three (3) translational and two (2) rotational degrees of freedom.

#### **Scope of delivery:**

Robot mechanics incl. gearbox, Servo motor adapter, Threaded protection caps, Transport and packing instructions

#### **Connecting dimensions:**

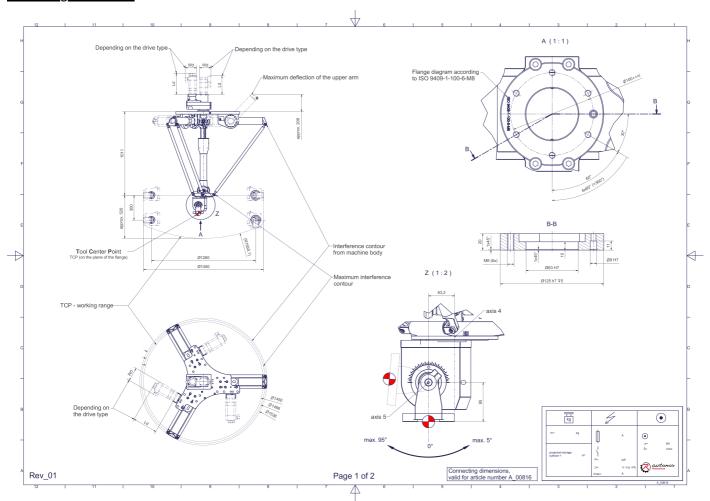

<u>Downloads:</u> <u>Connecting dimensions (PDF)</u> <u>3D model (STP)</u> <u>3D model (PDF)</u>



# Product data sheet https://autonoxfinder.com/en/A\_00816-FO

Date of download: Nov 4, 2025 Time of download: 00:26 UTC

#### **Technical specifications:**

man and the second	5. I. W. (I. ).
Field of application	Standard (not hygienic)
Kinematics	Parallel
Translatory Degrees of Freedom (X,Y,Z)	3
Rotational Degrees of Freedom $(\alpha,\beta,\gamma)$	2
Nominal payload [kg lbs] *	12   26.5
Working area-diameter [mm in]	1450   57.1
Working height outside [mm in]	300   11.8
Working height center [mm in]	520   20.5
Max. acceleration torque of the rotation $\alpha/\beta$ around X/Y at the output $[Nm in.lbs]$	135   1194.9
Nominal torque of the rotation $\alpha/\beta$ around X/Y at the output [Nm $ $ in.lbs]	135   1194.9
Max. speed of the rotation $\alpha/\beta$ around X/Y at the output [1/min]	77
Nominal speed of the rotation $\alpha/\beta$ around X/Y at the output [1/min]	77
Max. acceleration torque of the rotation γ around Z at the output [Nm in.lbs]	240   2124.2
Nominal torque of the rotation y around Z at the output [Nm in.lbs]	240   2124.2
Max. speed of the rotation y around Z at the output [1/min]	177
Nominal speed of the rotation y around Z at the output [1/min]	124
Bearing type of the telescopic shaft(s)	Roller bearing
Bearing type of the arm joints	Roller bearing
Lubricants of the bearings	Food-grade (FO)
Lubricants of the gearboxes	Food-grade (FO)
Cleaning	No high pressure
Ambient temperature [°C °F]	0 to +40   +32 to +104
Relative humidity level [%]	95 (free of condensation)
Mounting position	Floor, Ceiling, Wall (on request), Angle (on request)

<sup>\*</sup> All given values are nominal values (nominal payload referred to a nominal performance) and can vary under realworld conditions depending on the application (tool specifications, load distances, reduction (partly) of the nominal performance when using food-grade lubricants, ...). Please consider our technical data sheets regarding the load capacity.