DELTA RL4-T1-1600-12kg

Article number: A_00830-T1-FO

Lubricant variant: Food-grade lubricants (FO)

Description:
This type of robot is based on the principle of parallel kinematics. All drives are mounted in a fixed position on the robot head. Motor cables are not moved. The robot has three (3) translational and one (1) rotational degree(s) of freedom.

Scope of delivery:
Robot mechanics incl. gearbox, Servo motor adapter, Threaded protection caps , Transport and packing instructions

Connecting dimensions:

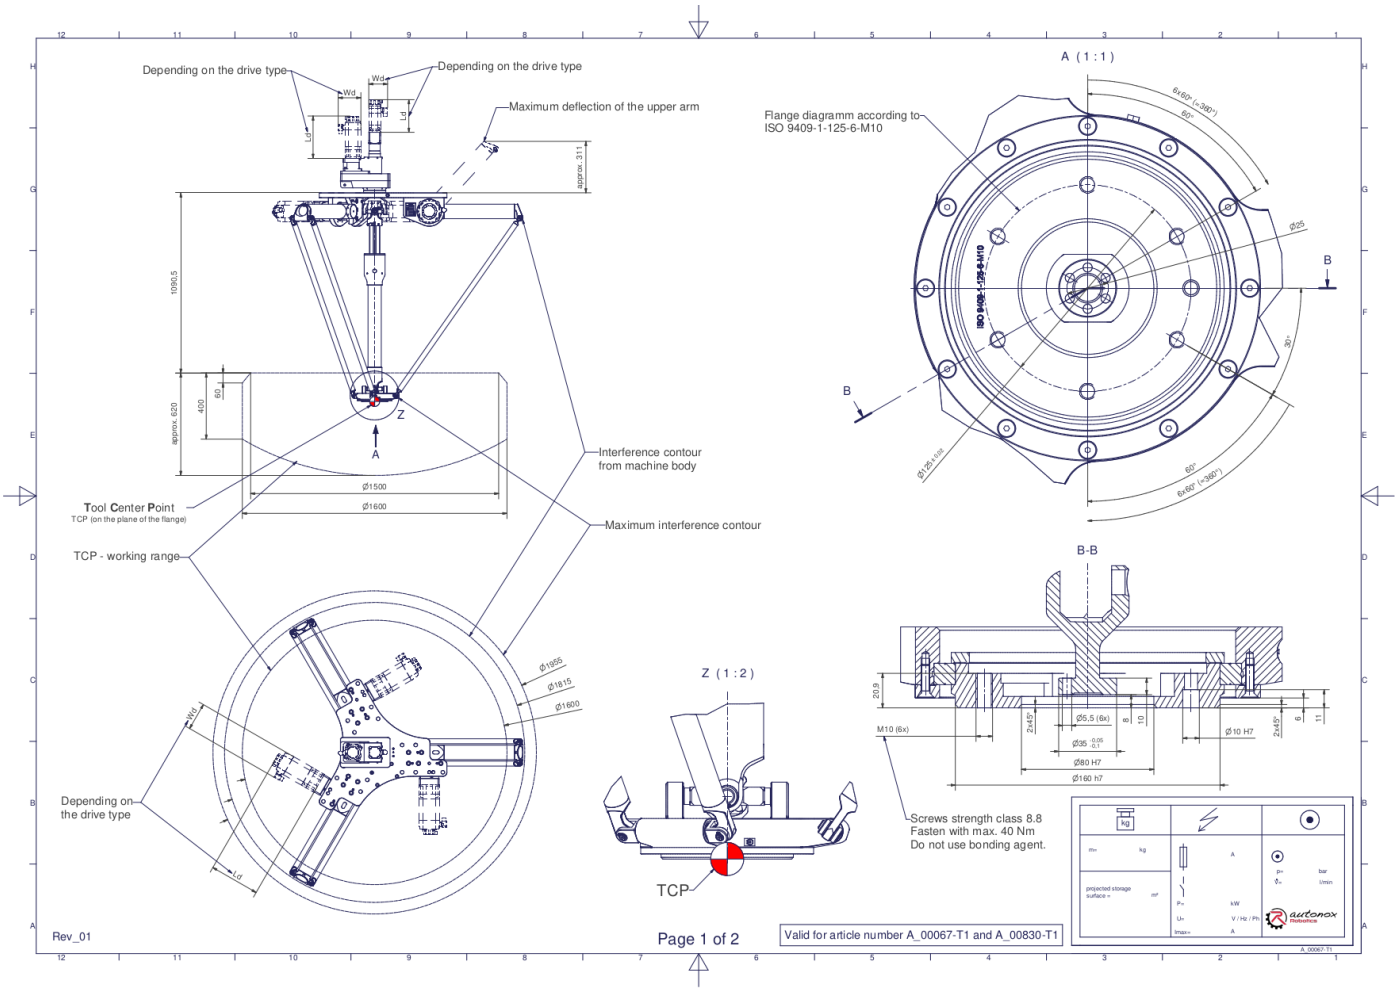

Downloads: Connecting dimensions (PDF) 3D model (STP) 3D model (PDF)

We refer to our General Terms of Sale and Supply and Terms of use.

© 2025 autonox Robotics GmbH | www.autonox.com

Technical specifications:

Field of application	Standard (not hygienic)
Kinematics	Parallel
Translatory Degrees of Freedom (X,Y,Z)	3
Rotational Degrees of Freedom (α,ß,γ)	1
Nominal payload [kg|lbs] *	12 | 26.5
Working area-diameter [mm|in]	1600 | 63.0
Working height outside [mm|in]	400 | 15.7
Working height center [mm|in]	620 | 24.4
Output type of the tool actuation	Flange (T)
Number of the tool actuation (telescopic shaft(s))	1
Max. acceleration torque of the rotation γ around Z at the output [Nm|in.lbs]	240 | 2124.2
Nominal torque of the rotation γ around Z at the output [Nm|in.lbs]	240 | 2124.2
Max. speed of the rotation γ around Z at the output [1/min]	177
Nominal speed of the rotation γ around Z at the output [1/min]	124
Max. acceleration torque of the tool actuation T/TS1 at the output [Nm|in.lbs]	40 | 354.0
Nominal torque of the tool actuation T/TS1 at the output [Nm|in.lbs]	23 | 203.6
Max. speed of the tool actuation T/TS1 at the output [1/min]	171
Nominal speed of the tool actuation T/TS1 at the output [1/min]	114
Bearing type of the telescopic shaft(s)	Roller bearing
Bearing type of the arm joints	Roller bearing
Lubricants of the bearings	Food-grade (FO)
Lubricants of the gearboxes	Food-grade (FO)
Cleaning	No high pressure
Ambient temperature [°C|°F]	0 to +40 | +32 to +104
Relative humidity level [%]	95 (free of condensation)
Mounting position	Floor, Ceiling, Wall (on request), Angle (on request)
Robot weight without drive engineering (esp. motors) [kg|lbs]	124 | 273.4

* All given values are nominal values (nominal payload referred to a nominal performance) and can vary under realworld conditions depending on the application (tool specifications, load distances, reduction (partly) of the nominal performance when using food-grade lubricants, ...). Please consider our technical data sheets regarding the load capacity.

We refer to our General Terms of Sale and Supply and Terms of use.

© 2025 autonox Robotics GmbH | www.autonox.com

Gearbox article number for this robot mechanics:

Function	Article number	Document
Drive of the upper arms	MT_BGR00022174-xx-FO	Operating manual gearbox type 3 (PDF)
Drive of the telescopic shaft for rotation y around Z	MT_BGR00100444-xx-FO	Operating manual gearbox type 7 (PDF)
Drive of the telescopic shaft for tool actuation T/TS1	MT_WST00103494-xx-FO	Operating manual gearbox type 6 (PDF)

We refer to our General Terms of Sale and Supply and Terms of use.

© 2025 autonox Robotics GmbH | www.autonox.com