

## Product data sheet <a href="https://autonoxfinder.com/en/A\_00911-FO">https://autonoxfinder.com/en/A\_00911-FO</a>

Date of download: Oct 18, 2025 Time of download: 16:22 UTC

### DuoPod RVS2-750-3kg

**Article number:** A\_00911-FO **Mirror-inverted variant:** No

**Lubricant variant:** Food-grade lubricants (FO)




#### **Description:**

This type of robot is based on the principle of parallel kinematics. All drives are mounted in a fixed position on the robot head. Motor cables are not moved. The robot has two (2) translational degrees of freedom.

#### **Scope of delivery:**

Robot mechanics incl. gearbox, Servo motor adapter, Threaded protection caps, Transport and packing instructions

#### **Connecting dimensions:**

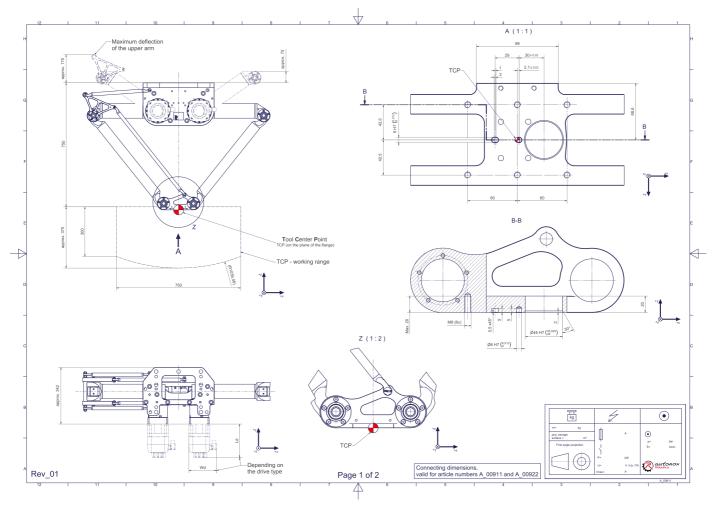

<u>Downloads:</u> <u>Connecting dimensions (PDF)</u> <u>3D model (STP)</u> <u>3D model (PDF)</u>



# Product data sheet https://autonoxfinder.com/en/A\_00911-FO

Date of download: Oct 18, 2025 Time of download: 16:22 UTC

#### **Technical specifications:**

Field of application	Standard (not hygienic)
Kinematics	Parallel
Translatory Degrees of Freedom (X,Y,Z)	2
Rotational Degrees of Freedom ( $\alpha$ , $\beta$ , $\gamma$ )	0
Nominal payload [kg lbs] *	3   6.6
Working area-width [mm in]	750   29.5
Working height outside [mm in]	300   11.8
Working height center [mm in]	370   14.6
Bearing type of the arm joints	Roller bearing
Lubricants of the bearings	Food-grade (FO)
Lubricants of the gearboxes	Food-grade (FO)
Cleaning	No high pressure
Ambient temperature [°C °F]	0 to +40   +32 to +104
Relative humidity level [%]	95 (free of condensation)
Mounting position	Floor, Ceiling, Wall (on request), Angle (on request)
Robot weight without drive engineering (esp. drive) [kg lbs]	49   108.0

<sup>\*</sup> All given values are nominal values (nominal payload referred to a nominal performance) and can vary under realworld conditions depending on the application (tool specifications, load distances, reduction (partly) of the nominal performance when using food-grade lubricants, ...). Please consider our technical data sheets regarding the load capacity.