

## Product data sheet <a href="https://autonoxfinder.com/en/A\_00917-FO">https://autonoxfinder.com/en/A\_00917-FO</a>

Date of download: Oct 25, 2025 Time of download: 10:31 UTC

### DuoPod RVS4-750-3kg

Article number: A\_00917-FO

Lubricant variant: Food-grade lubricants (FO)




#### **Description:**

This type of robot is based on the principle of parallel kinematics. All drives are mounted in a fixed position on the robot head. Motor cables are not moved. The robot has two (2) translational and one (1) rotational degree(s) of freedom.

#### **Scope of delivery:**

Robot mechanics incl. gearbox, Servo motor adapter, Threaded protection caps, Transport and packing instructions

#### **Connecting dimensions:**

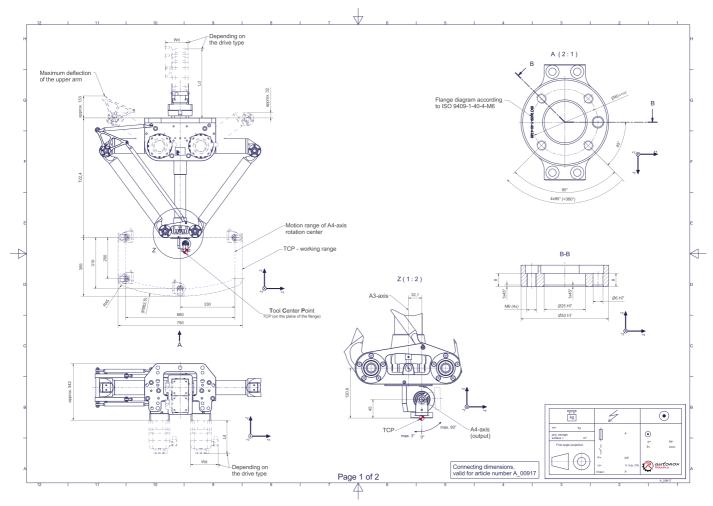

<u>Downloads:</u> <u>Connecting dimensions (PDF)</u> <u>3D model (STP)</u> <u>3D model (PDF)</u>



# Product data sheet https://autonoxfinder.com/en/A\_00917-FO

Date of download: Oct 25, 2025 Time of download: 10:31 UTC

#### **Technical specifications:**

made en la co	6. I. W. II. S. S.
Field of application	Standard (not hygienic)
Kinematics	Parallel
Translatory Degrees of Freedom (X,Y,Z)	2
Rotational Degrees of Freedom $(\alpha,\beta,\gamma)$	2
Nominal payload [kg   lbs] *	3   6.6
Working area-width [mm in]	750   29.5
Working height outside [mm in]	250   9.8
Working height center [mm in]	355   14.0
Max. acceleration torque of the rotation $\alpha/\beta$ around X/Y at the output $[Nm in.lbs]$	16   141.6
Nominal torque of the rotation $\alpha/\beta$ around X/Y at the output [Nm   in.lbs]	16   141.6
Max. speed of the rotation $\alpha/\beta$ around X/Y at the output [1/min]	82
Nominal speed of the rotation $\alpha/\beta$ around X/Y at the output [1/min]	82
Max. acceleration torque of the rotation γ around Z at the output [Nm in.lbs]	40   354.0
Nominal torque of the rotation y around Z at the output [Nm in.lbs]	40   354.0
Max. speed of the rotation γ around Z at the output [1/min]	260
Nominal speed of the rotation y around Z at the output [1/min]	160
Bearing type of the telescopic shaft(s)	Roller bearing
Bearing type of the arm joints	Roller bearing
Lubricants of the bearings	Food-grade (FO)
Lubricants of the gearboxes	Food-grade (FO)
Cleaning	No high pressure
Ambient temperature [°C °F]	0 to +40   +32 to +104
Relative humidity level [%]	95 (free of condensation)
Mounting position	Floor, Ceiling, Wall (on request), Angle (on request)

<sup>\*</sup> All given values are nominal values (nominal payload referred to a nominal performance) and can vary under realworld conditions depending on the application (tool specifications, load distances, reduction (partly) of the nominal performance when using food-grade lubricants, ...). Please consider our technical data sheets regarding the load capacity.