



Maximum deflection of the upper arm


Depending on the drive type

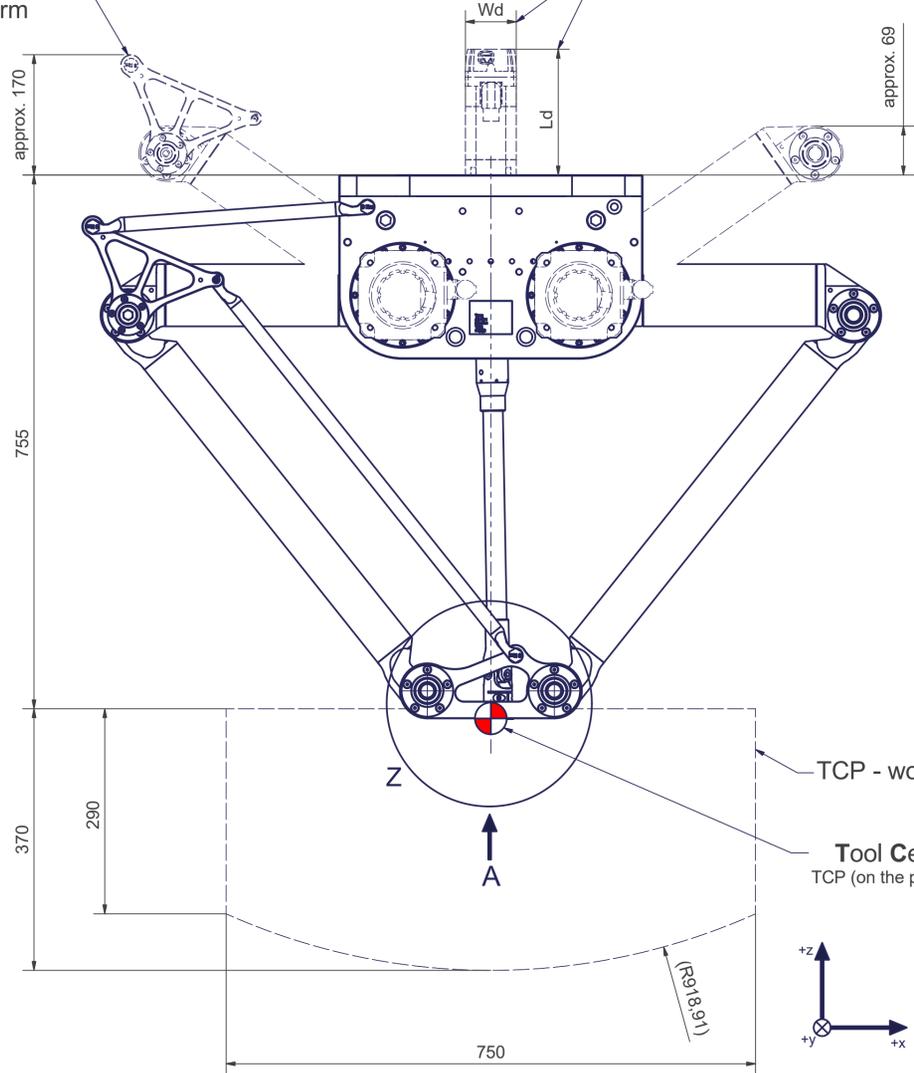


A (1:1)

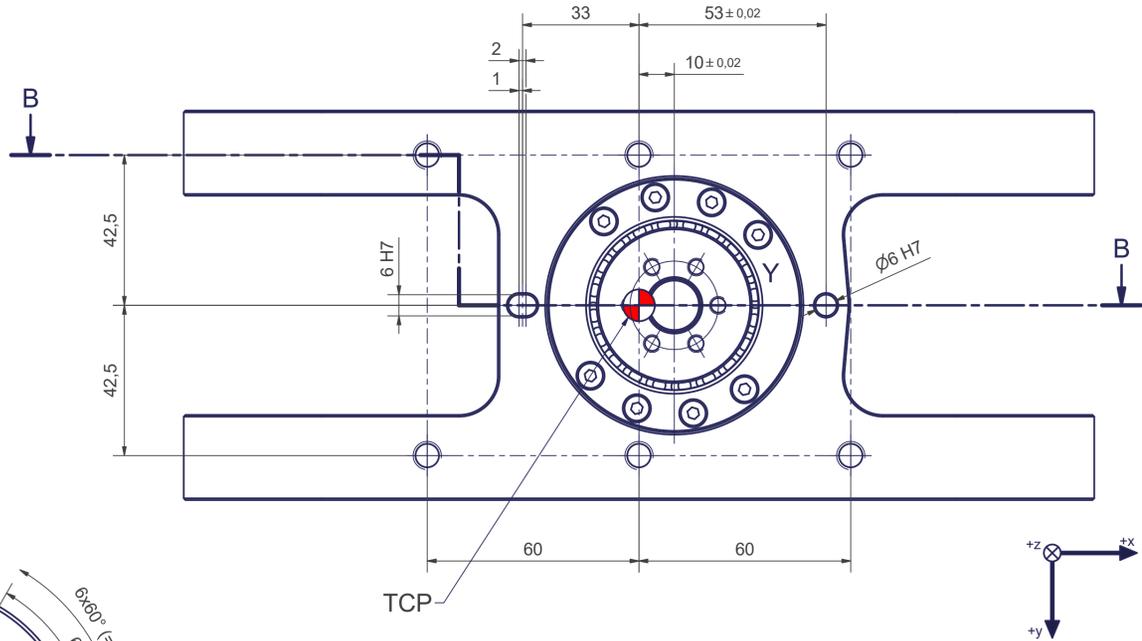



Y (2:1)

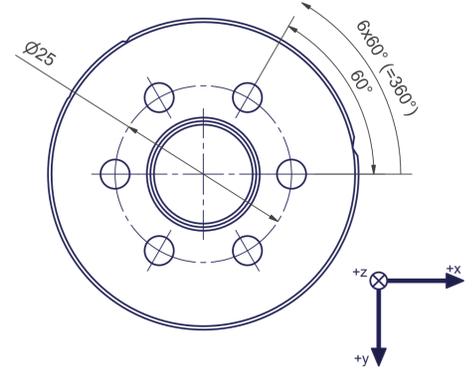

B-B

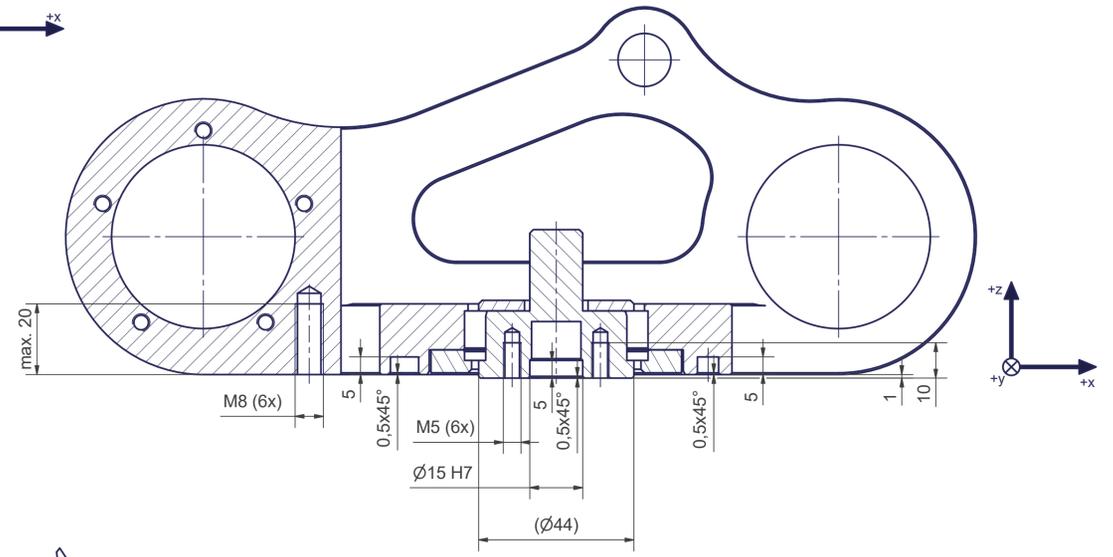

Z (1:2)

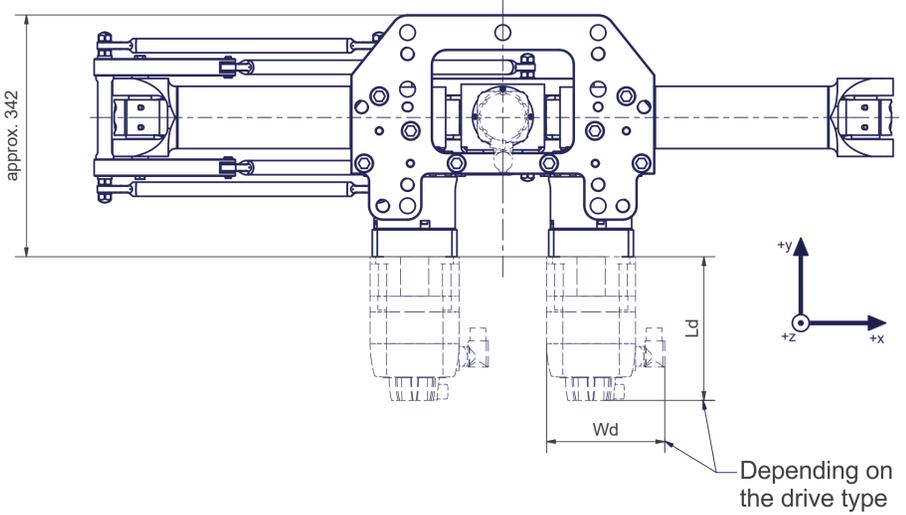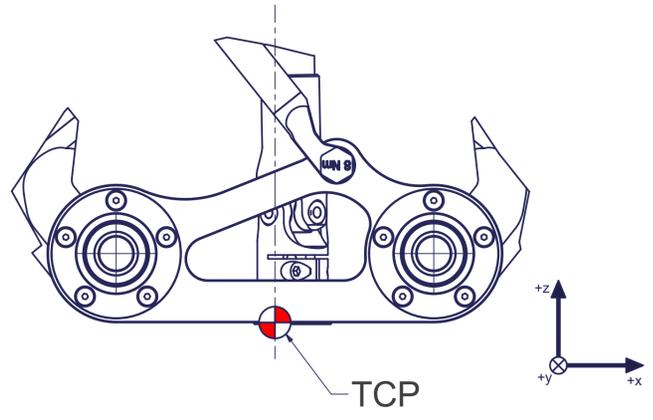



Connecting dimensions, valid for article numbers A_00911-T1 and A_00922-T1

m= kg	A	p= bar
proj. storage surface = m²		v= l/min
First angle projection	P= kW	
	U= V / Hz / Ph	
	Imax= A	

12 11 10 9 8 7 6 5 4 3 2 1

-  All fastening holes $\text{\O}22$ for screws M20 (DIN ISO 4014/4017 -8.8) without washer. Fastening holes are coloured red.
-  Drilling holes for locating pins are filled red. Recommended dimensions of locating pins: $\text{\O}12$ h6.
-  Thread holes for screws M20 are coloured green. The tightening torque for these screws (streight class 8.8) is 170 Nm.

Z (2:1)

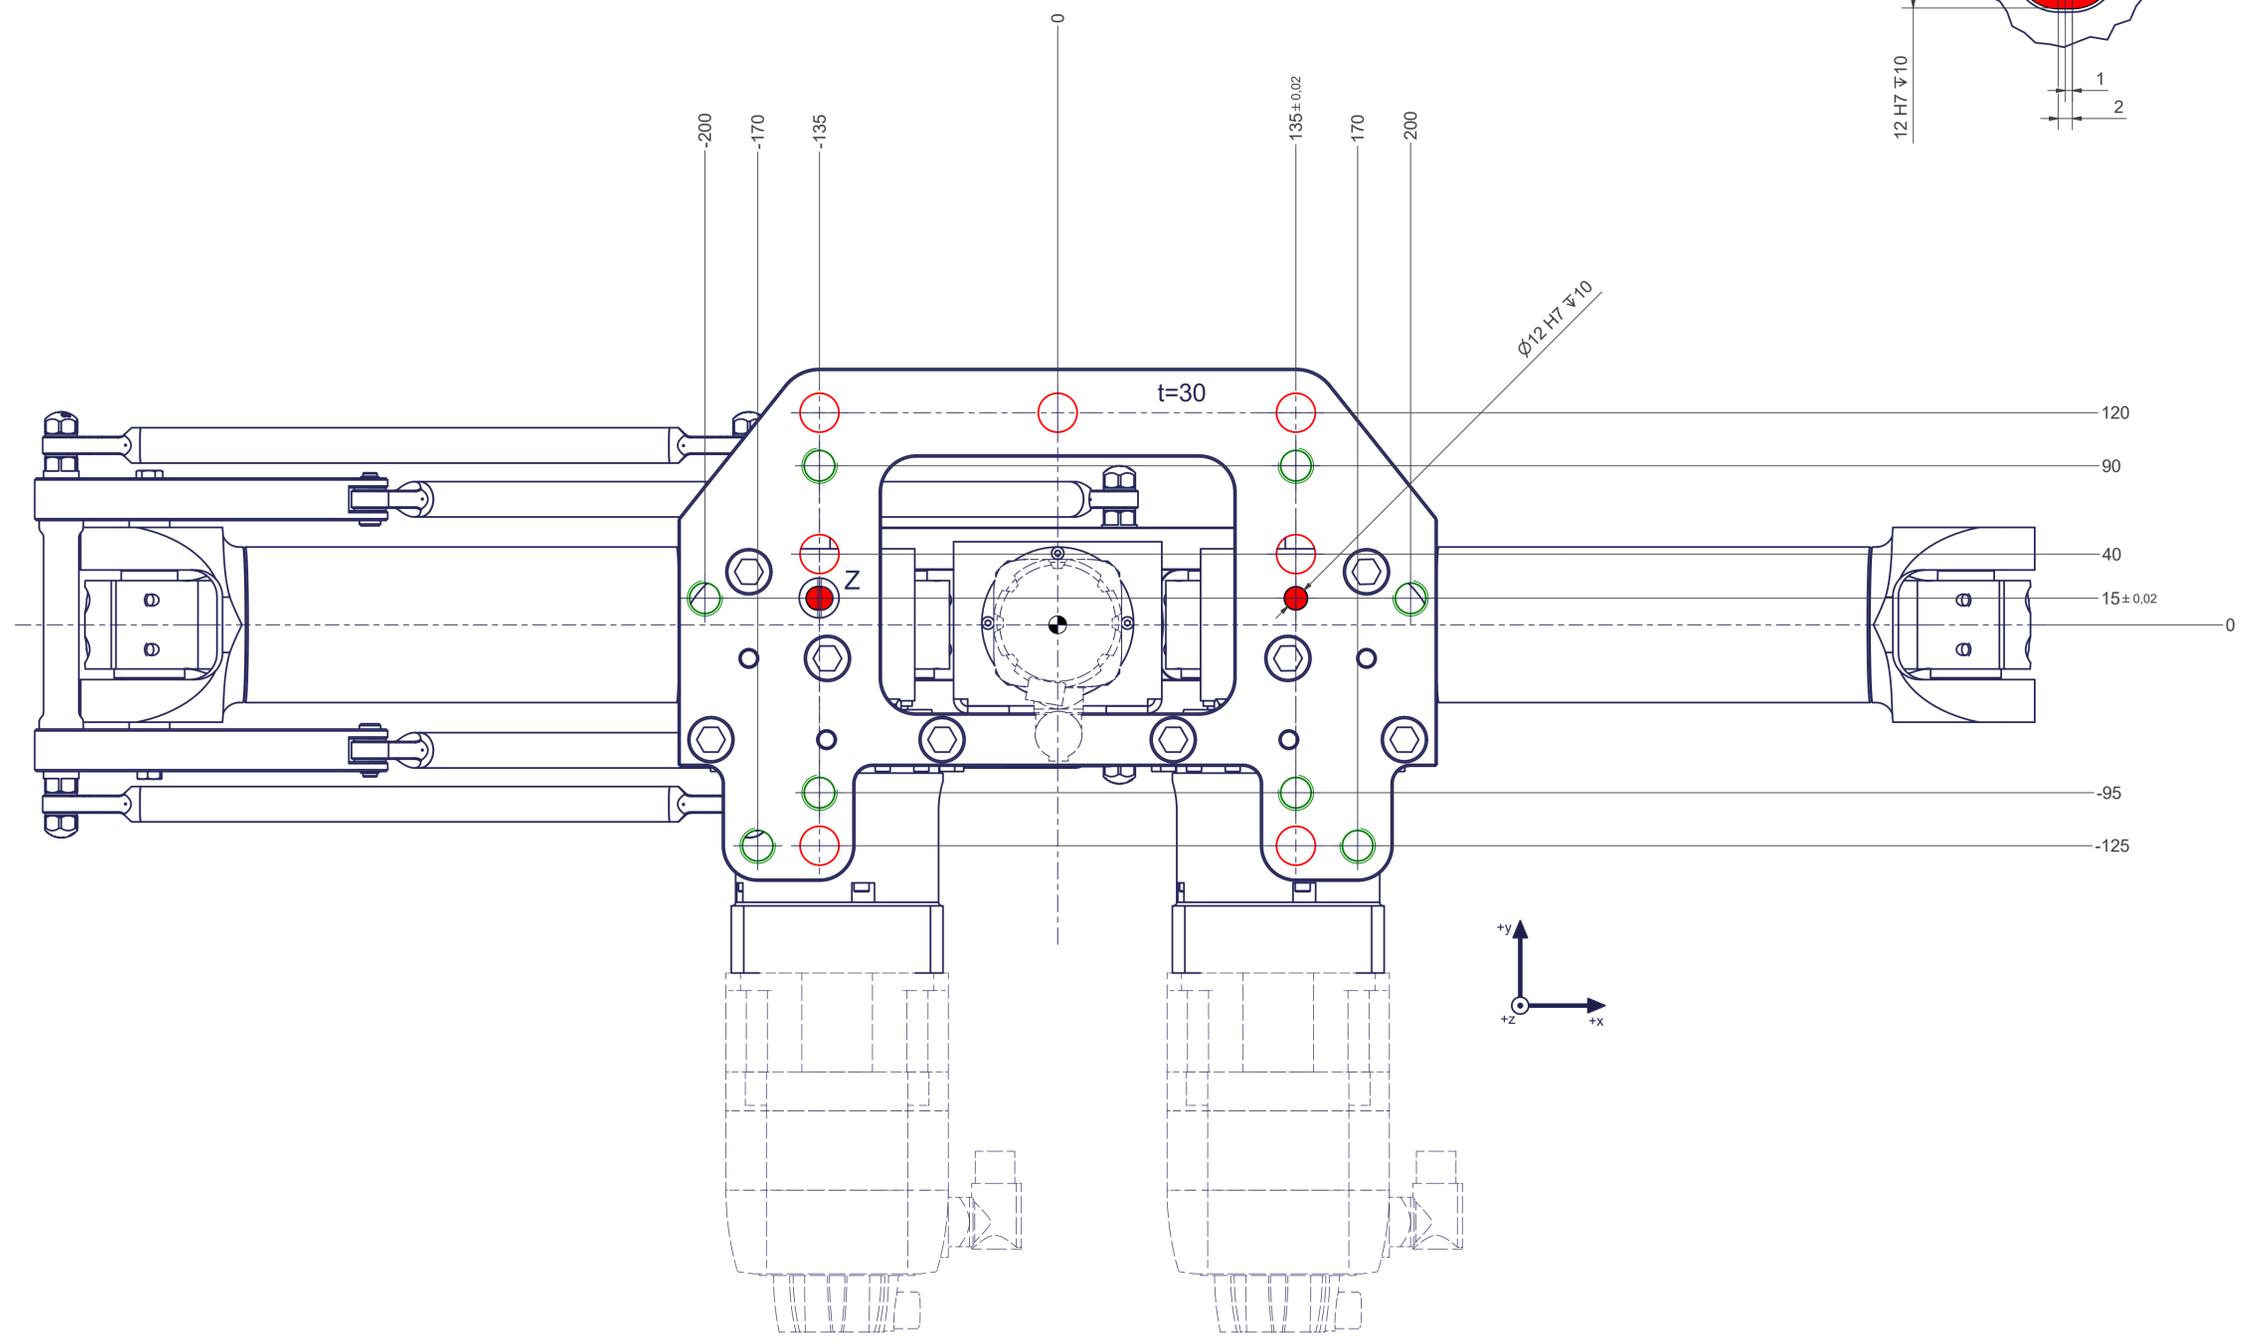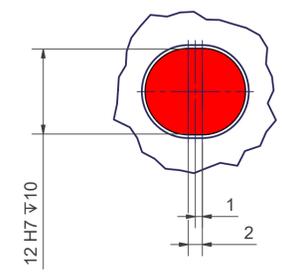

12 11 10 9 8 7 6 5 4 3 2 1