

A (2:1)

4x90° (=360°)

90°

Flange diagram according to ISO 9409-1-40-4-M6

ISO 9409-1-40-4-M6

Ø40 ± 0.02

B-B

Z (1:1)

TCP


Connecting dimensions, valid for article number A_00082-04

m= kg	A	p= bar
proj. storage surface = m²		v= l/min
First angle projection	P= kW	
	U= V / Hz / Ph	
Imax= A		

12 11 10 9 8 7 6 5 4 3 2 1

- All fastening holes $\varnothing 13,5$ mm for screws M12 (DIN ISO 4014/4017 -8.8) without washers. Fastening holes are coloured red.
- Drilling holes for locating pins are filled red. Recommended dimensions of locating pins: $\varnothing 12$ h6

H
G
F
E
D
C
B
A

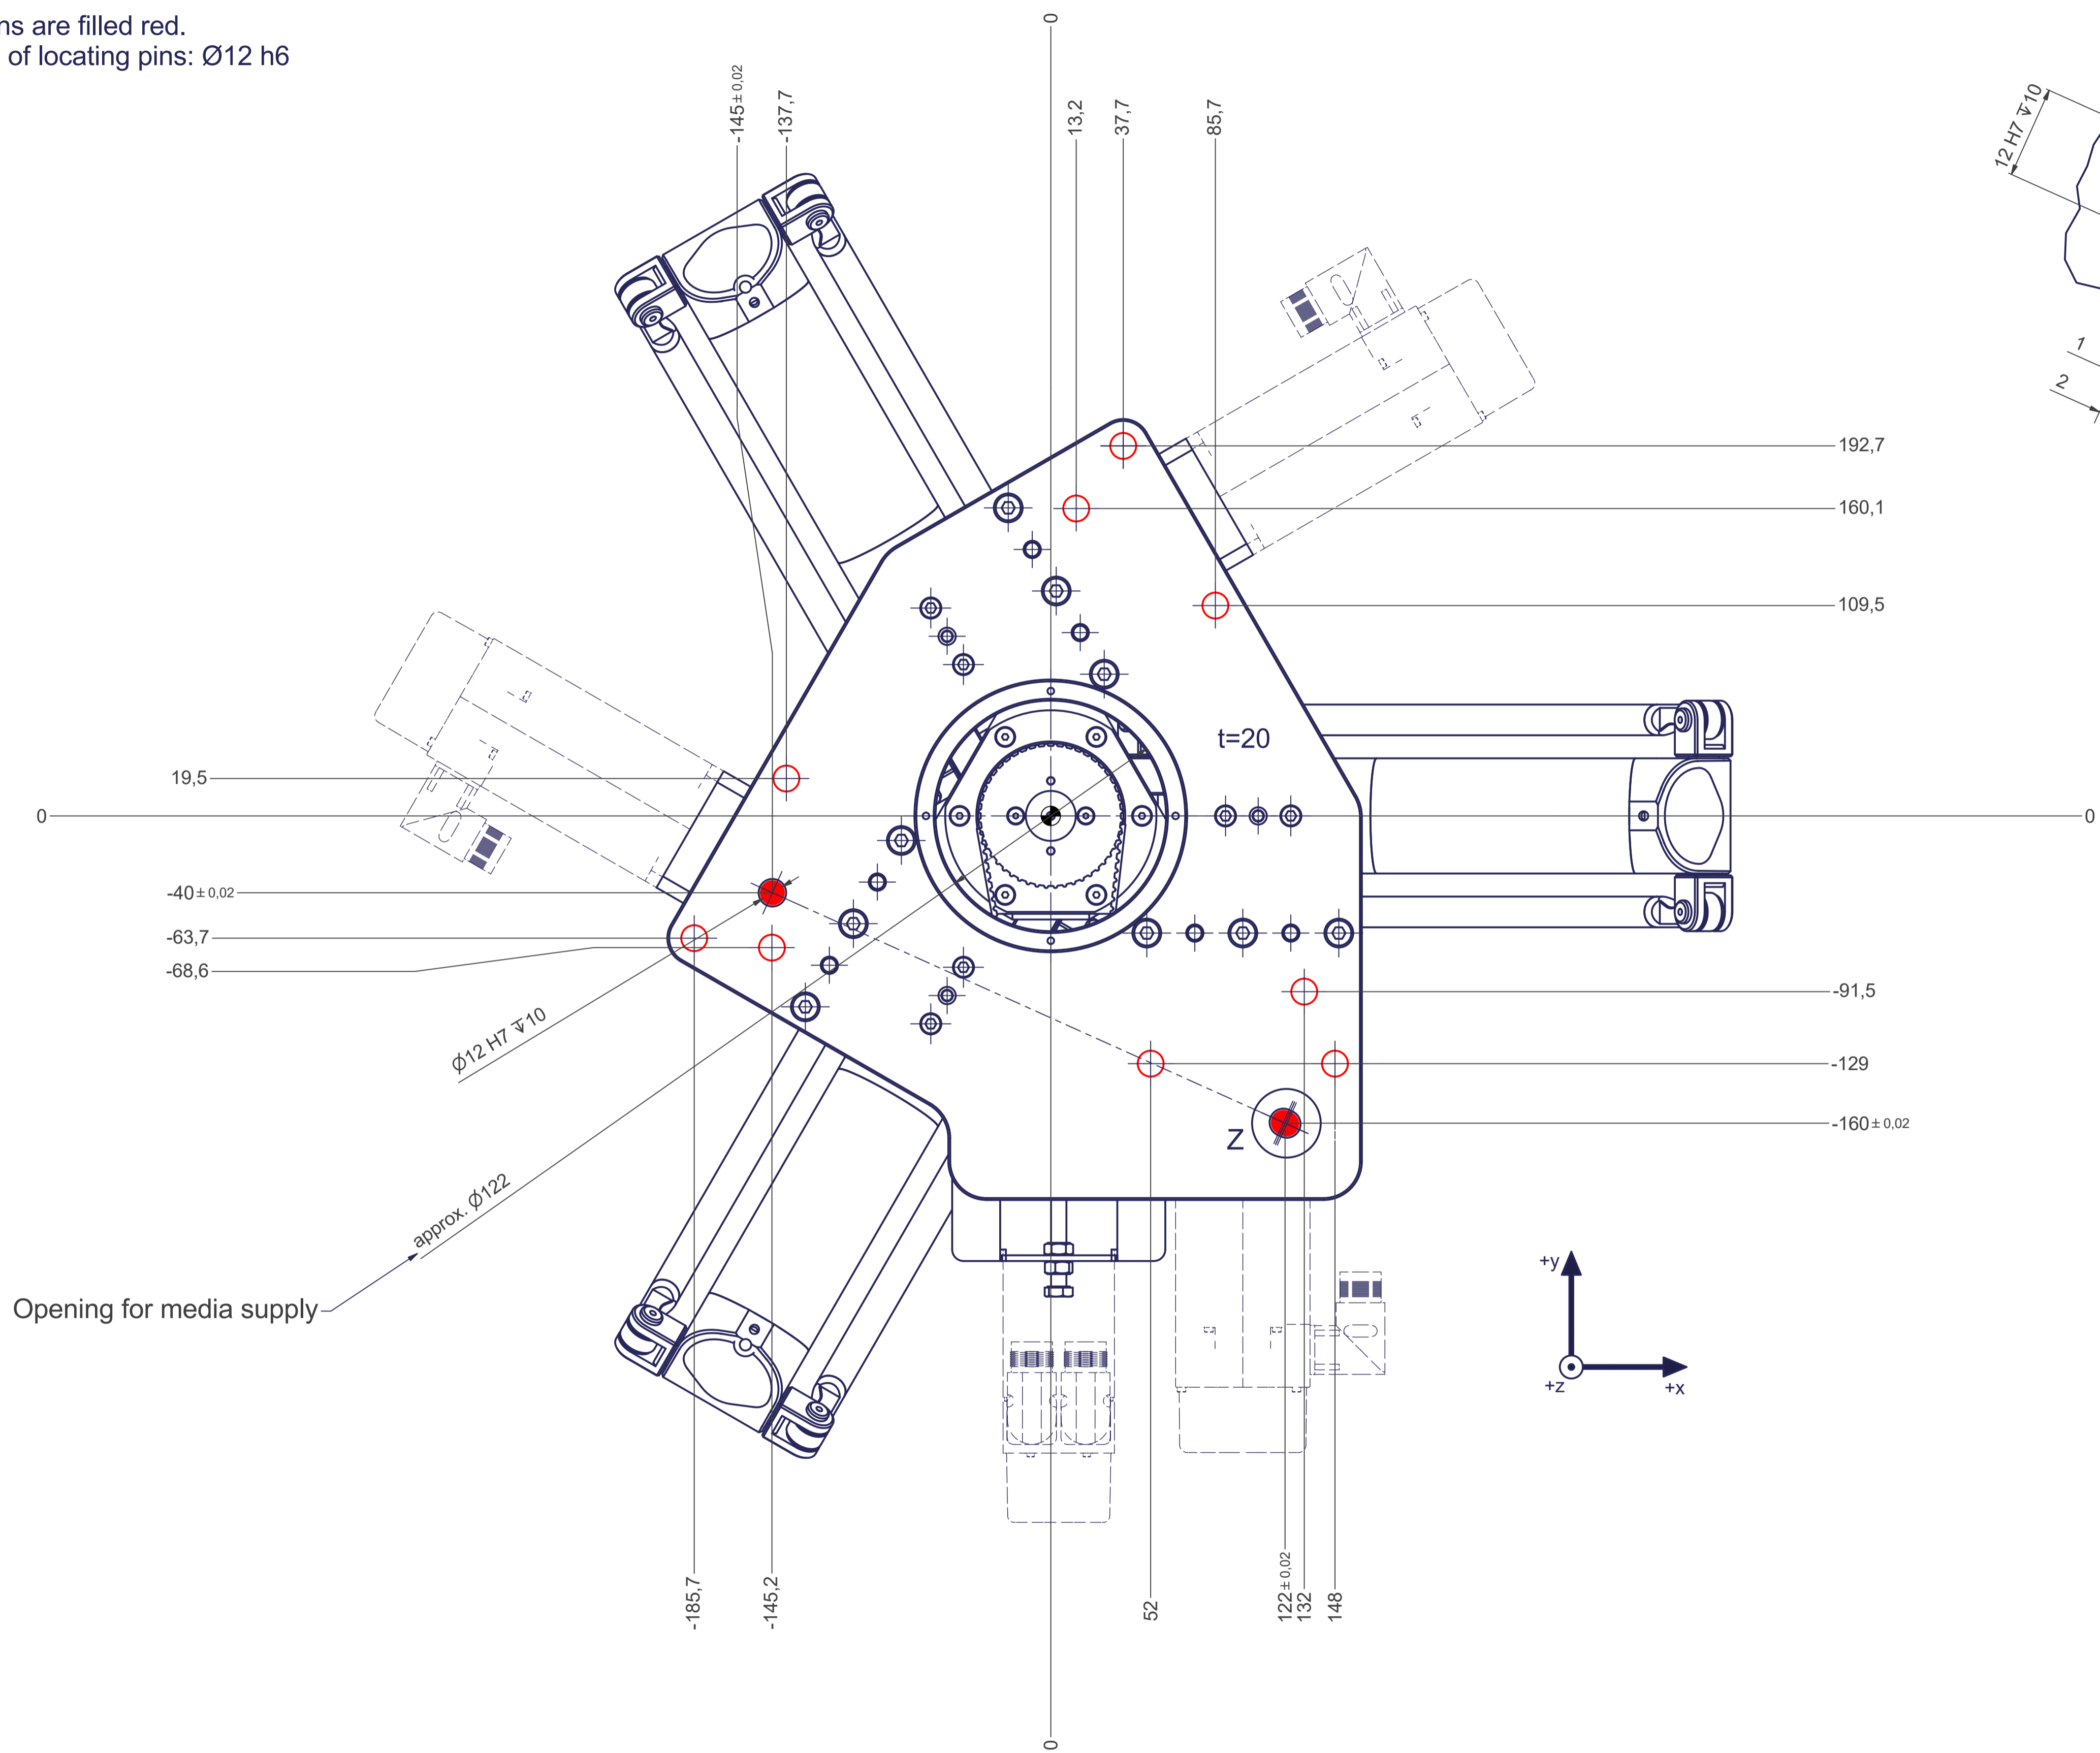

12 11 10 9 8 7 6 5 4 3 2 1