








| | | |
|--|---|---|
| <p>OPTIONAL: Tool-side change-adapter MT_BGR00021657</p>  | | |
| <p>kg</p> <p>m= kg</p> | <p>⚡</p> <p>A</p> | <p>⊙</p> <p>p= bar</p> <p>ψ= l/min</p> |
| <p>projected storage surface = m²</p> | <p>P= kW</p> <p>U= V / Hz / Ph</p> <p>I_{max}= A</p> |  |

12 11 10 9 8 7 6 5 4 3 2 1

-  All fastening holes $\varnothing 22$ for screws M20 (DIN ISO 4014/4017 -8.8) without washer. Fastening holes are coloured red. The tightening torque for these screws (strenght class 8.8) is 360 Nm (in a steel frame).
-  Drilling holes for locating pins are filled red. Recommended dimensions of locating pins: $\varnothing 12$ h6
-  Thread holes for screws M20 are coloured green. The tightening torque for these screws (strenght class 8.8) is 170 Nm.

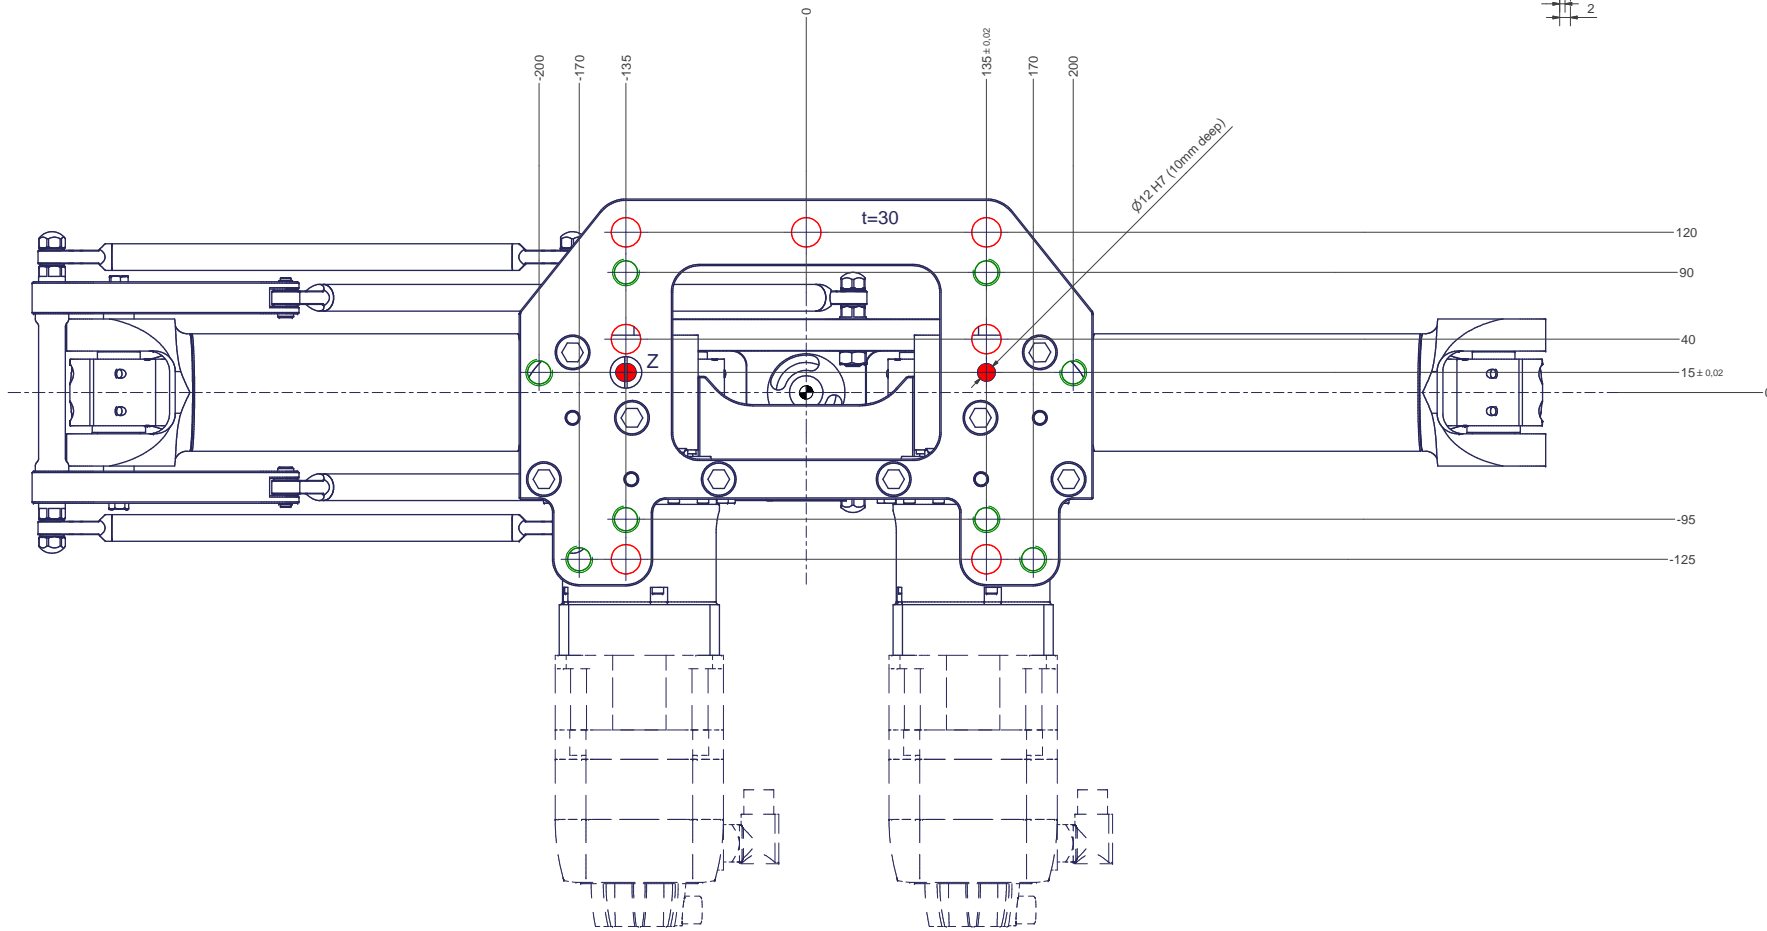

12 11 10 9 8 7 6 5 4 3 2 1