


A (2:1)

4x90° (=360°)

Flange diagram according to ISO 9409-1-40-4-M6

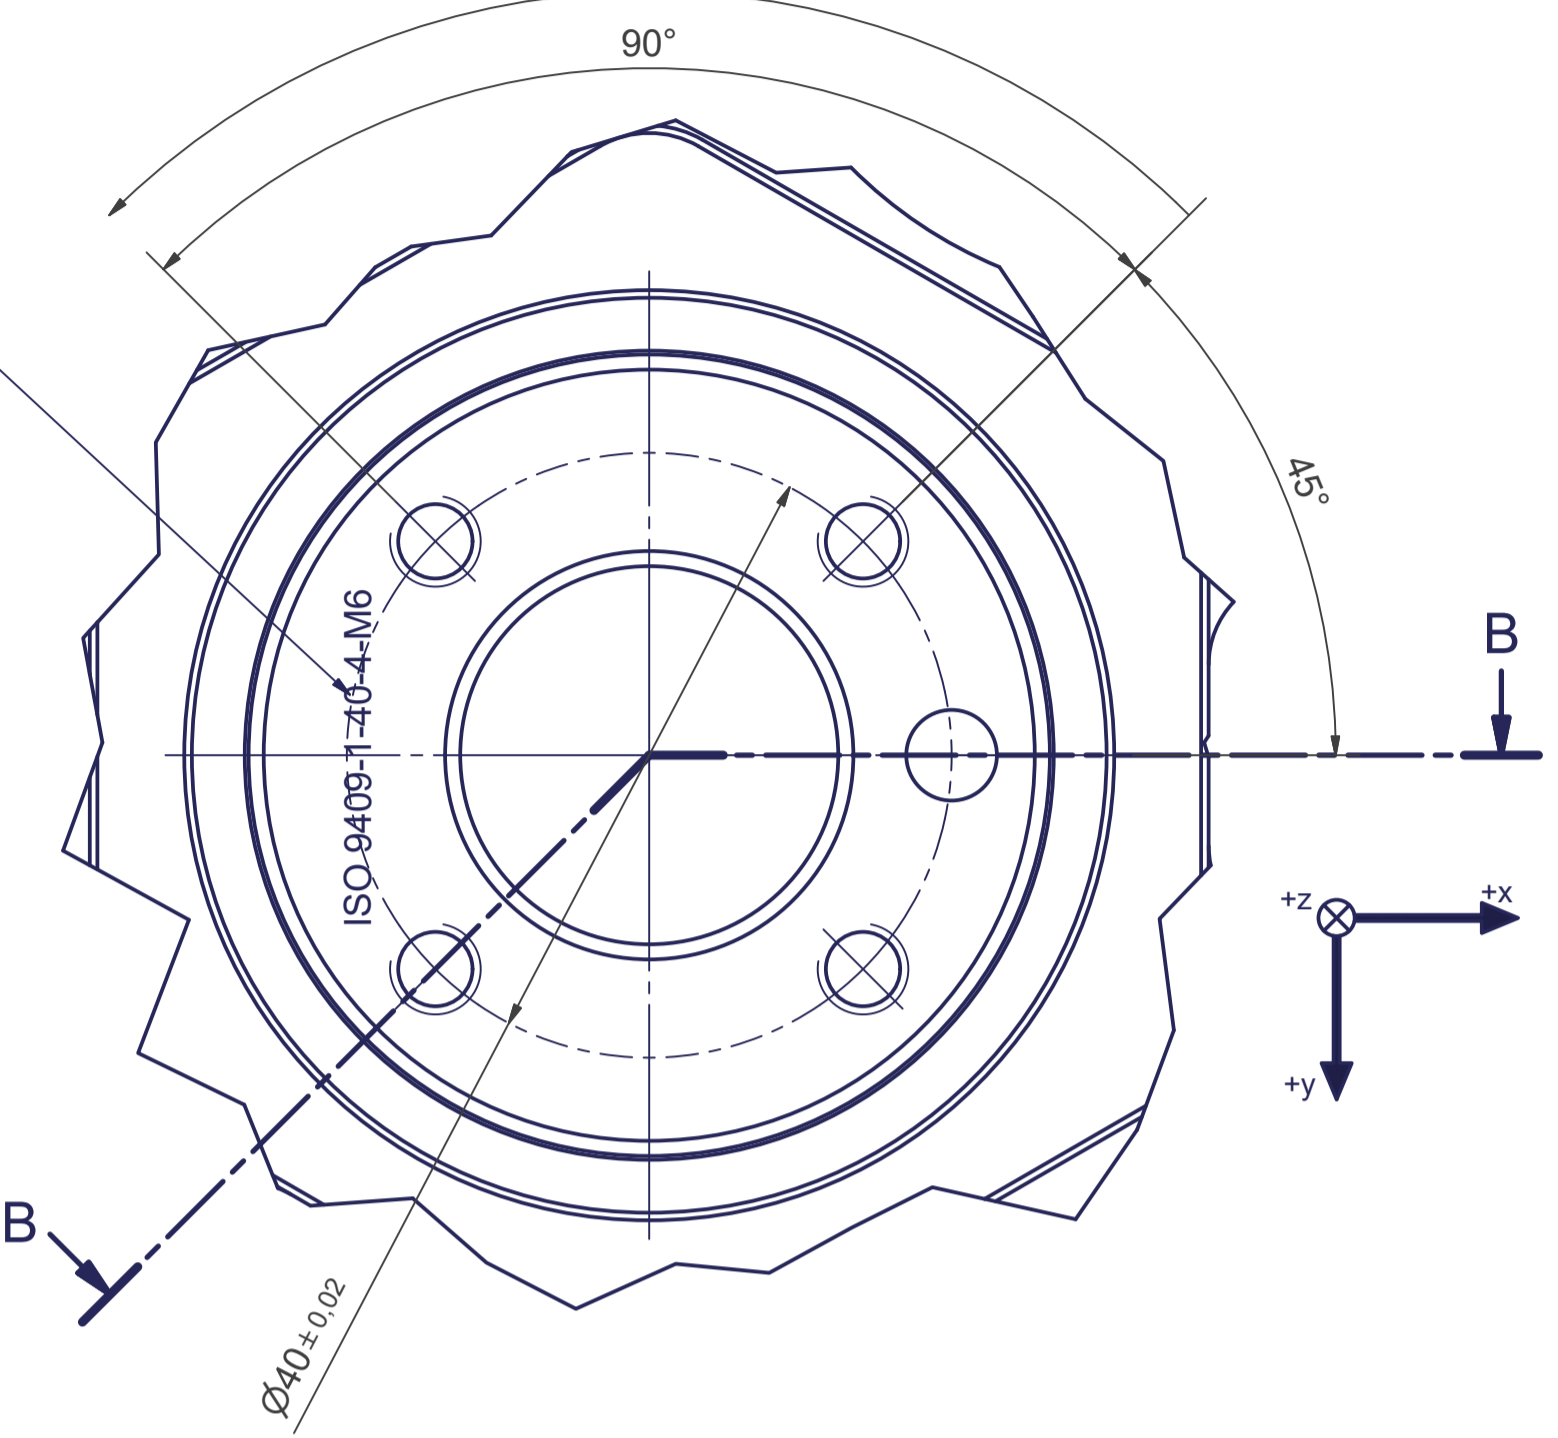


Don't turn the rotational axis in this marked area!


Interference contour from machine body

Maximum interference contour

B-B

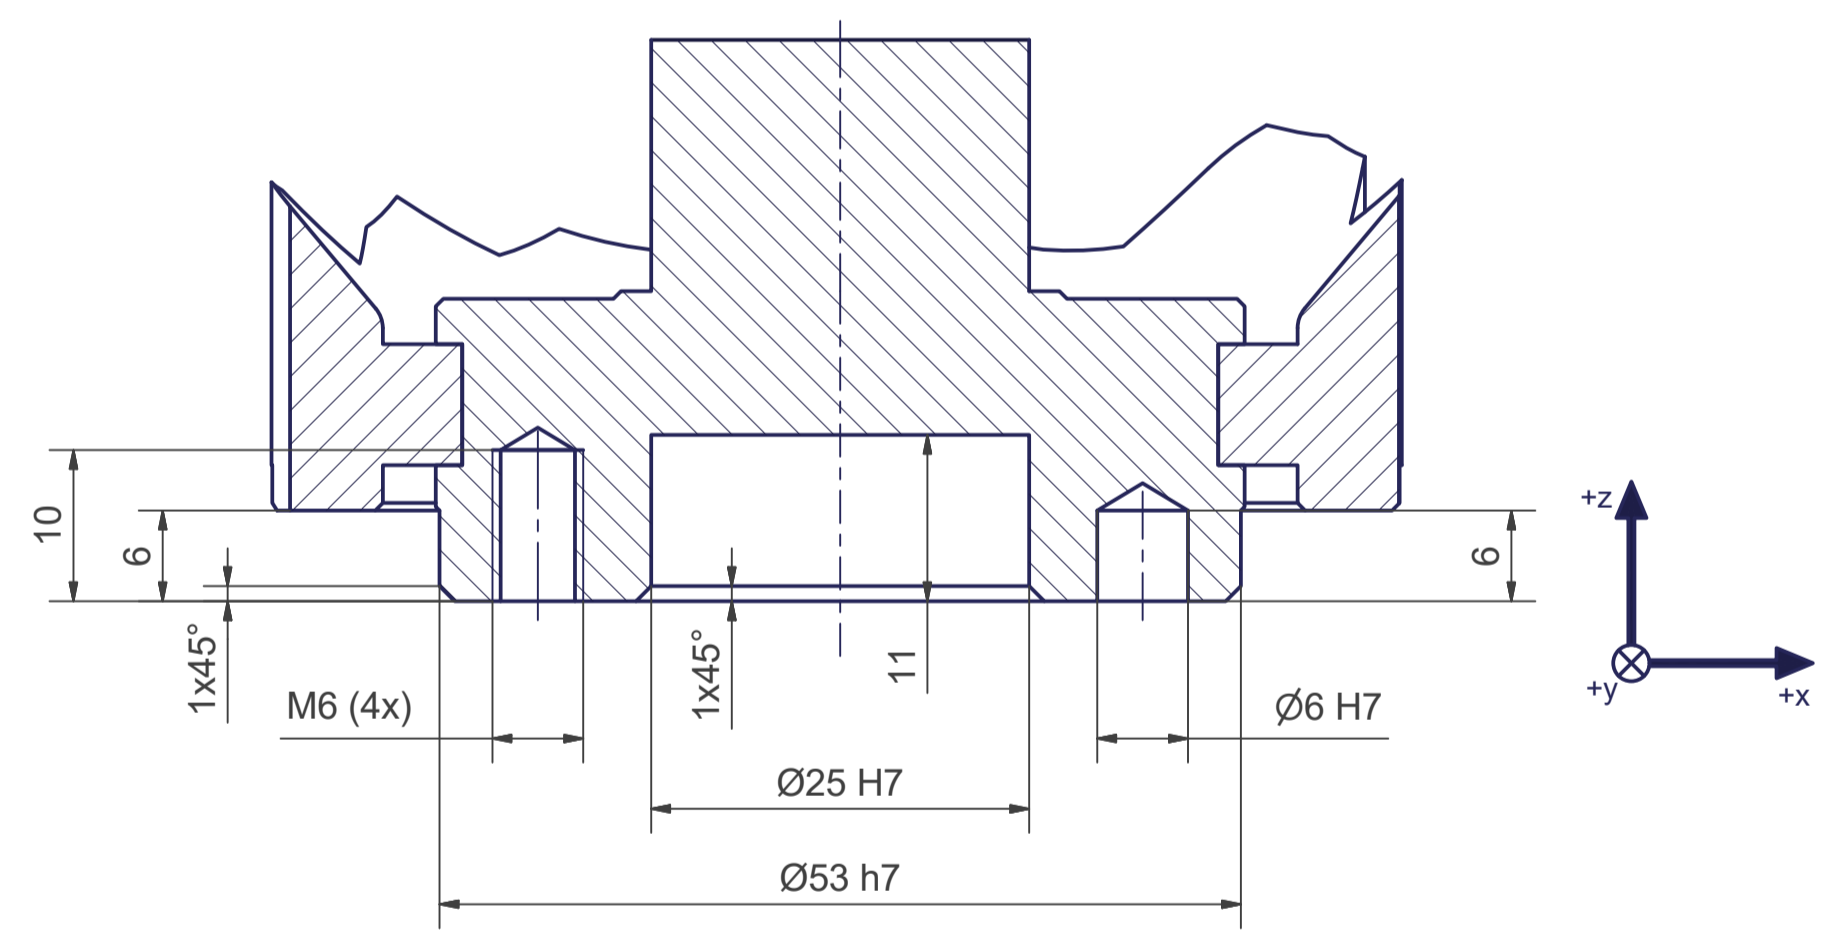


Z (1:1)

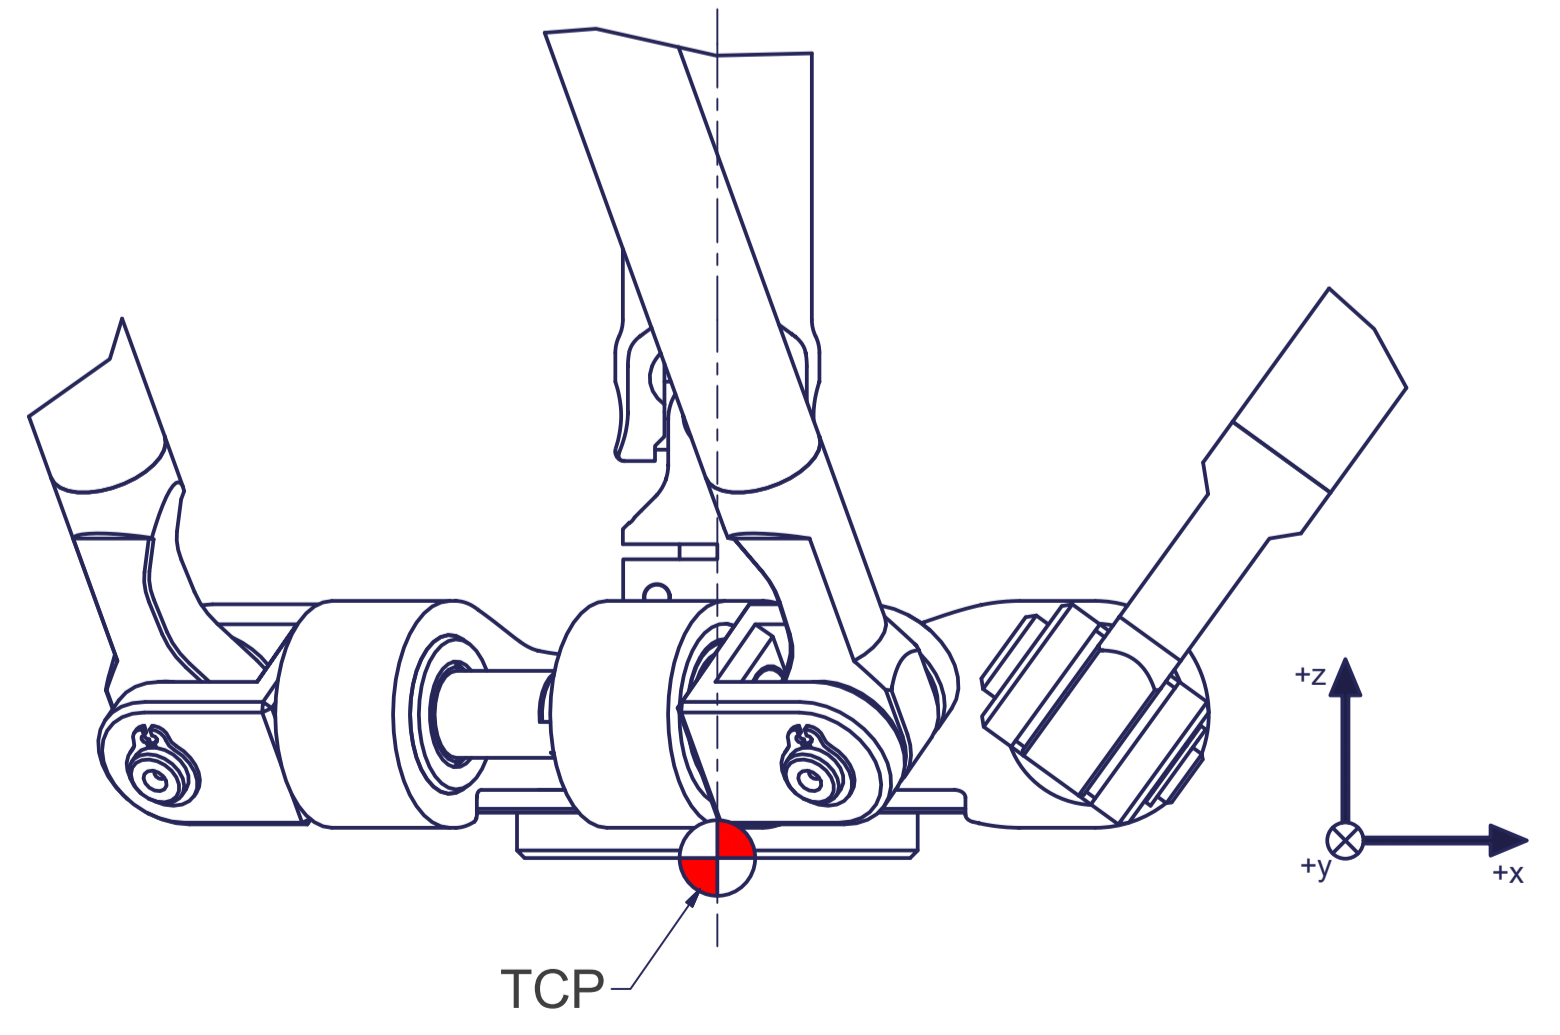

Tool Center Point
TCP (on the plane of the flange)

TCP - working range

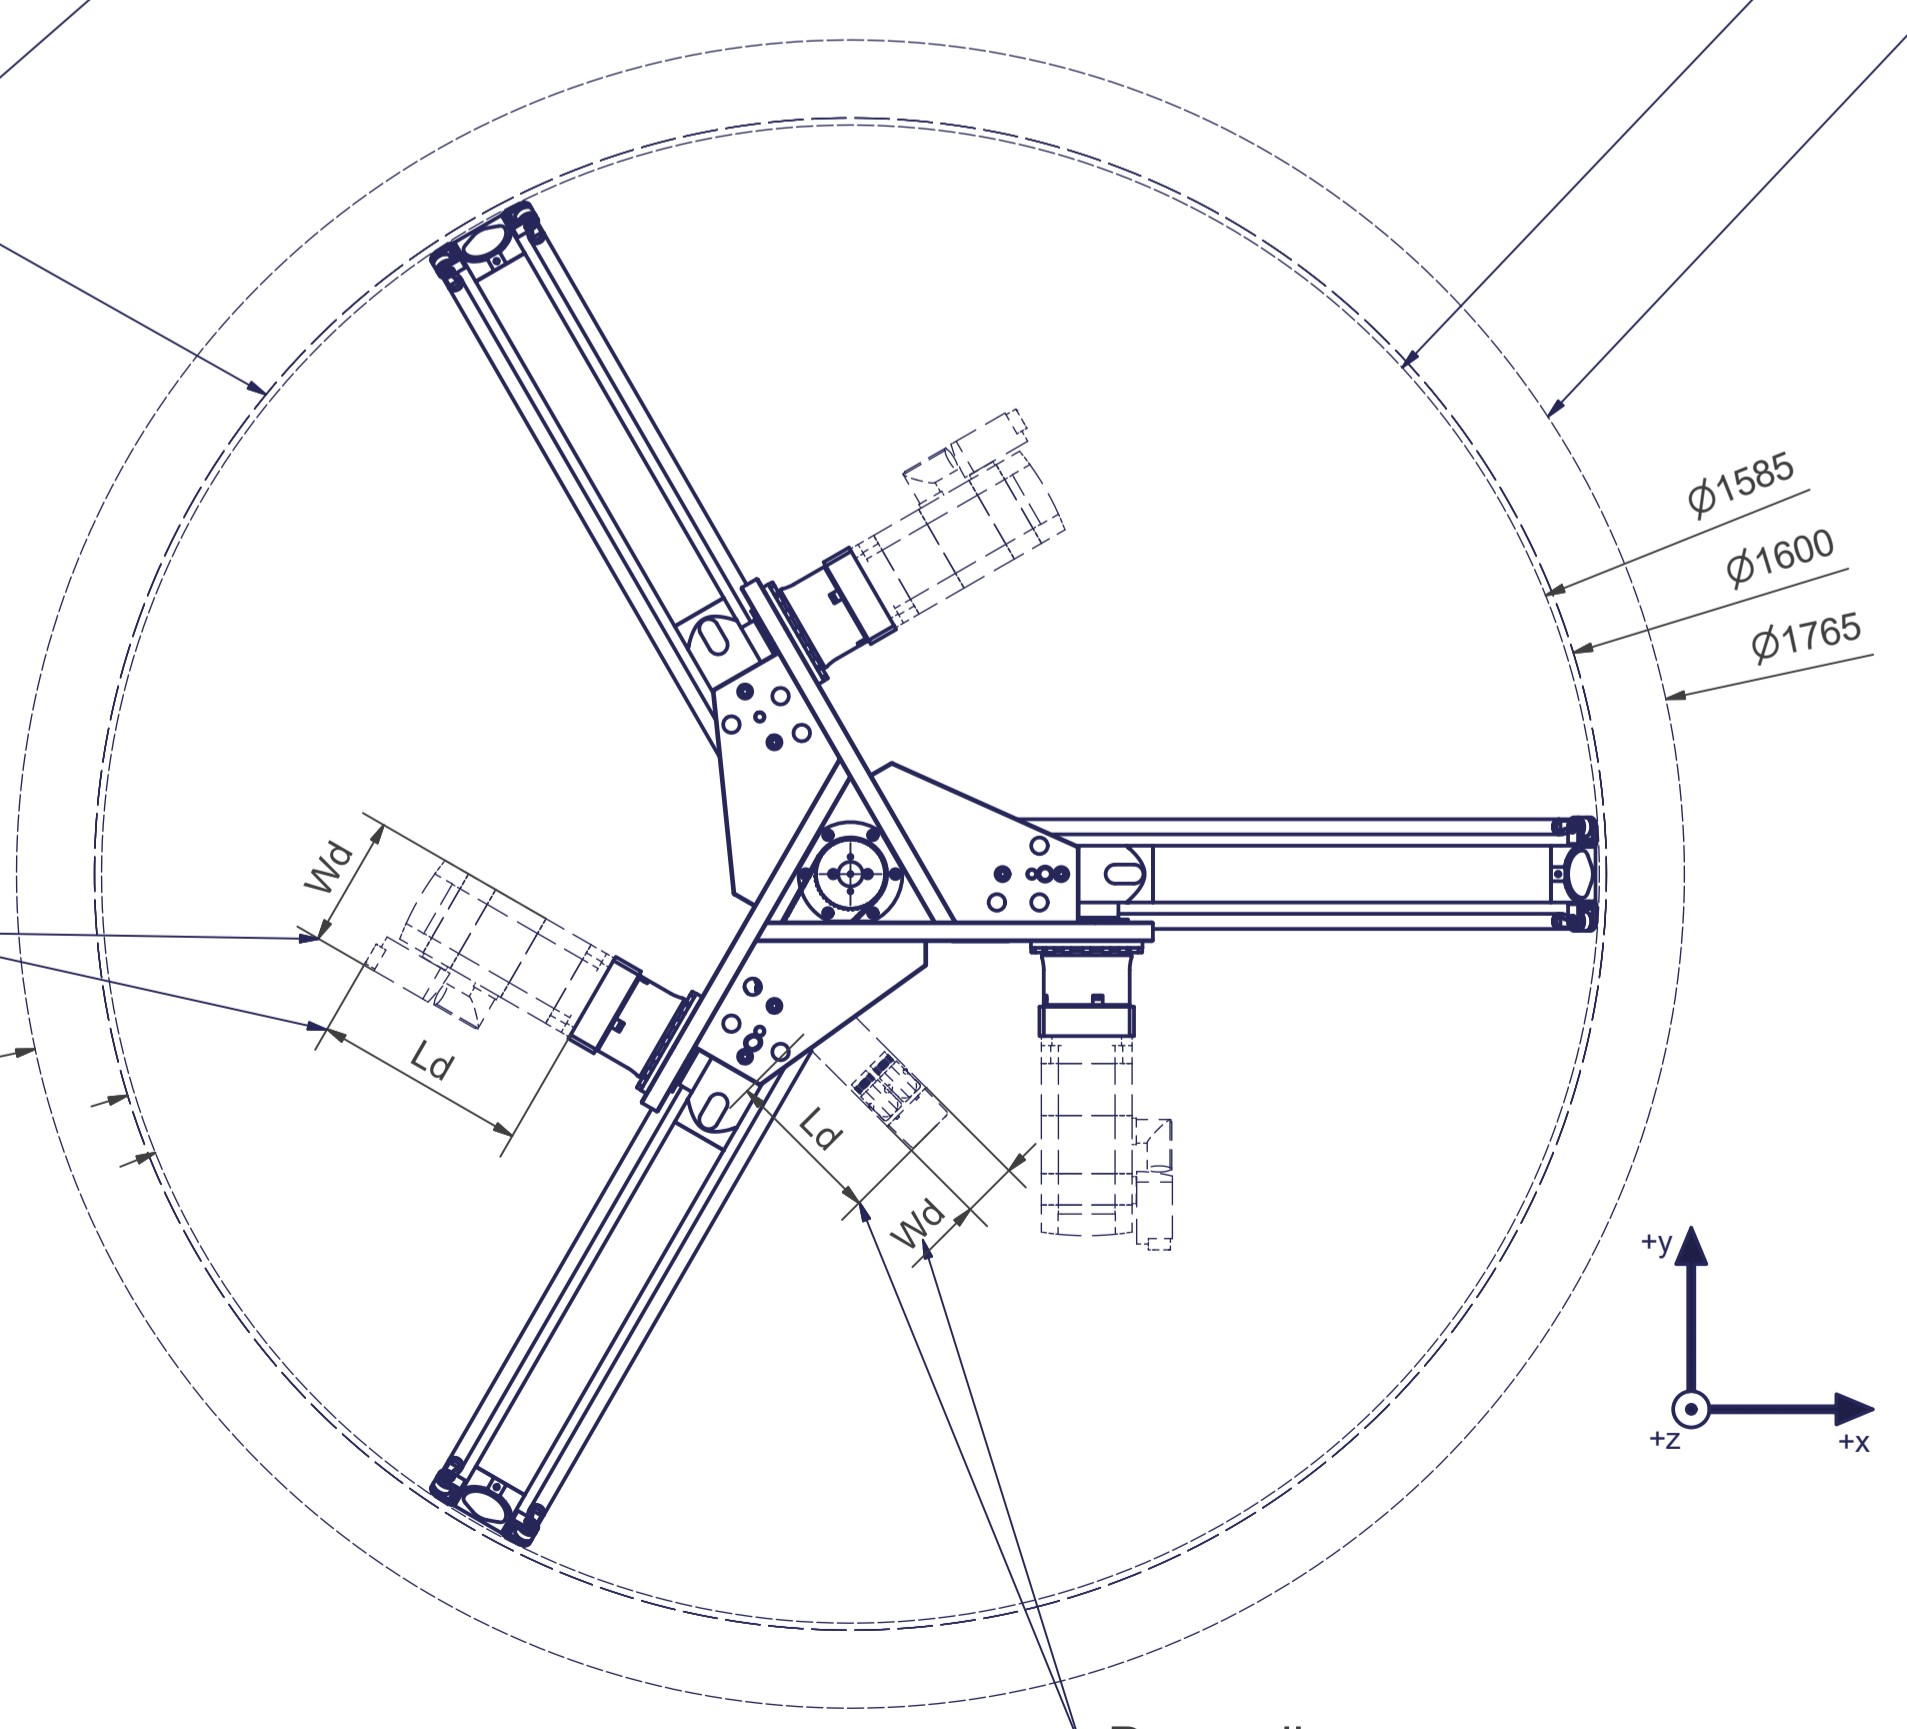



Depending on the drive type

Depending on the drive type

Connecting dimensions,
valid for article number A_00828-01

m= kg	A	p= bar
proj. storage surface = m ²		v̇= l/min
First angle projection	P= kW	
	U= V / Hz / Ph	
	Imax= A	

-  All fastening holes $\varnothing 17,5$ mm for screws M16 (DIN ISO 4014/4017 -8.8) without washers. Fastening holes are coloured red.
-  Drilling holes for locating pins are filled red. Recommended dimensions of locating pins: $\varnothing 12$ h6

