


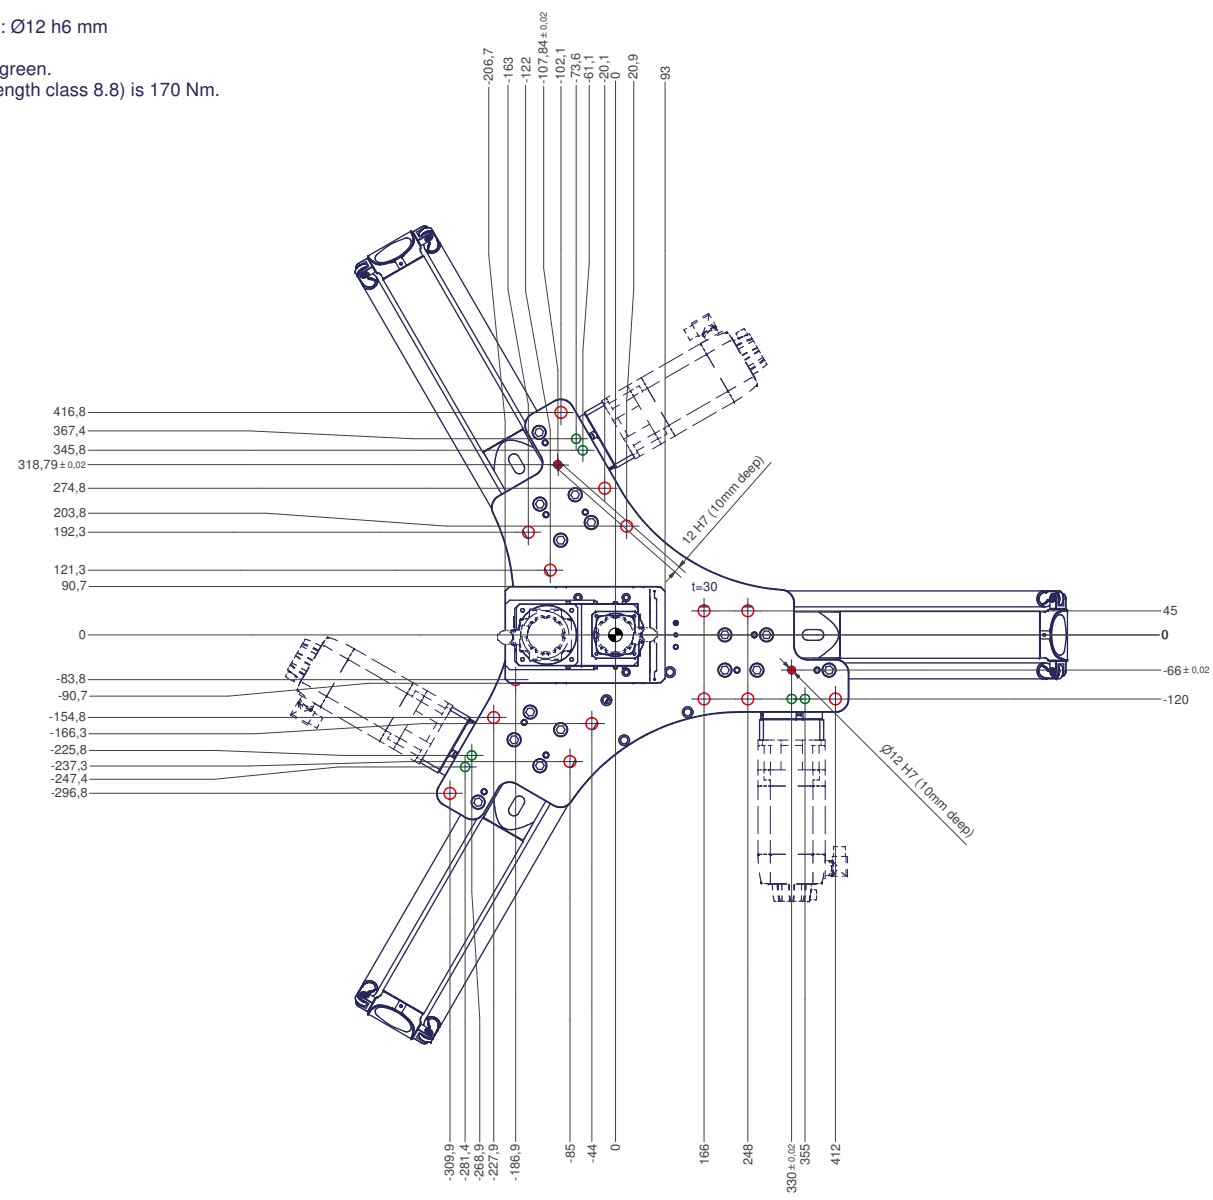


kg		A		bar	
m=	kg			p=	l/min
projected storage surface =		m <sup>2</sup>	P=	kW	
			U=	V / Hz / Ph	
			I <sub>max</sub> =	A	

12 11 10 9 8 7 6 5 4 3 2 1

-  All fastening holes  $\text{\O}22\text{mm}$  for screws M20 (DIN ISO 4014/4017 -8.8) without washer. Fastening holes are coloured red. The tightening torque for these screws (strength class 8.8) is 360 Nm. (in a steel frame)
-  Drilling holes for locating pins are filled red. Recommended dimensions of locating pins:  $\text{\O}12\text{ h6 mm}$
-  Thread holes for screws M20 are coloured green. The tightening torque for these screws (strength class 8.8) is 170 Nm.



12 11 10 9 8 7 6 5 4 3 2 1