

OPTIONAL:
Tool-side change-adapter
MT_BGR00021346

The mark "A" and "B"
of the Tool-side change-adapter
must fit with the mark "A" and "B"
on the Robot-side change-head

Fitting - (not included)
for example:
Fest, Push-in fitting
Product name: QS-1/4-10-1
Part number: 153018


OPTIONAL:
Tool-side change adapter
MT_BGR00021346

OPTIONAL:
Tool-side change-adapter MT_BGR00021346

m= kg		A	bar
projected storage surface = m ²		P= kW	v= l/min
		U= V / Hz / Ph	
		I _{max} = A	



A_00067-ATS

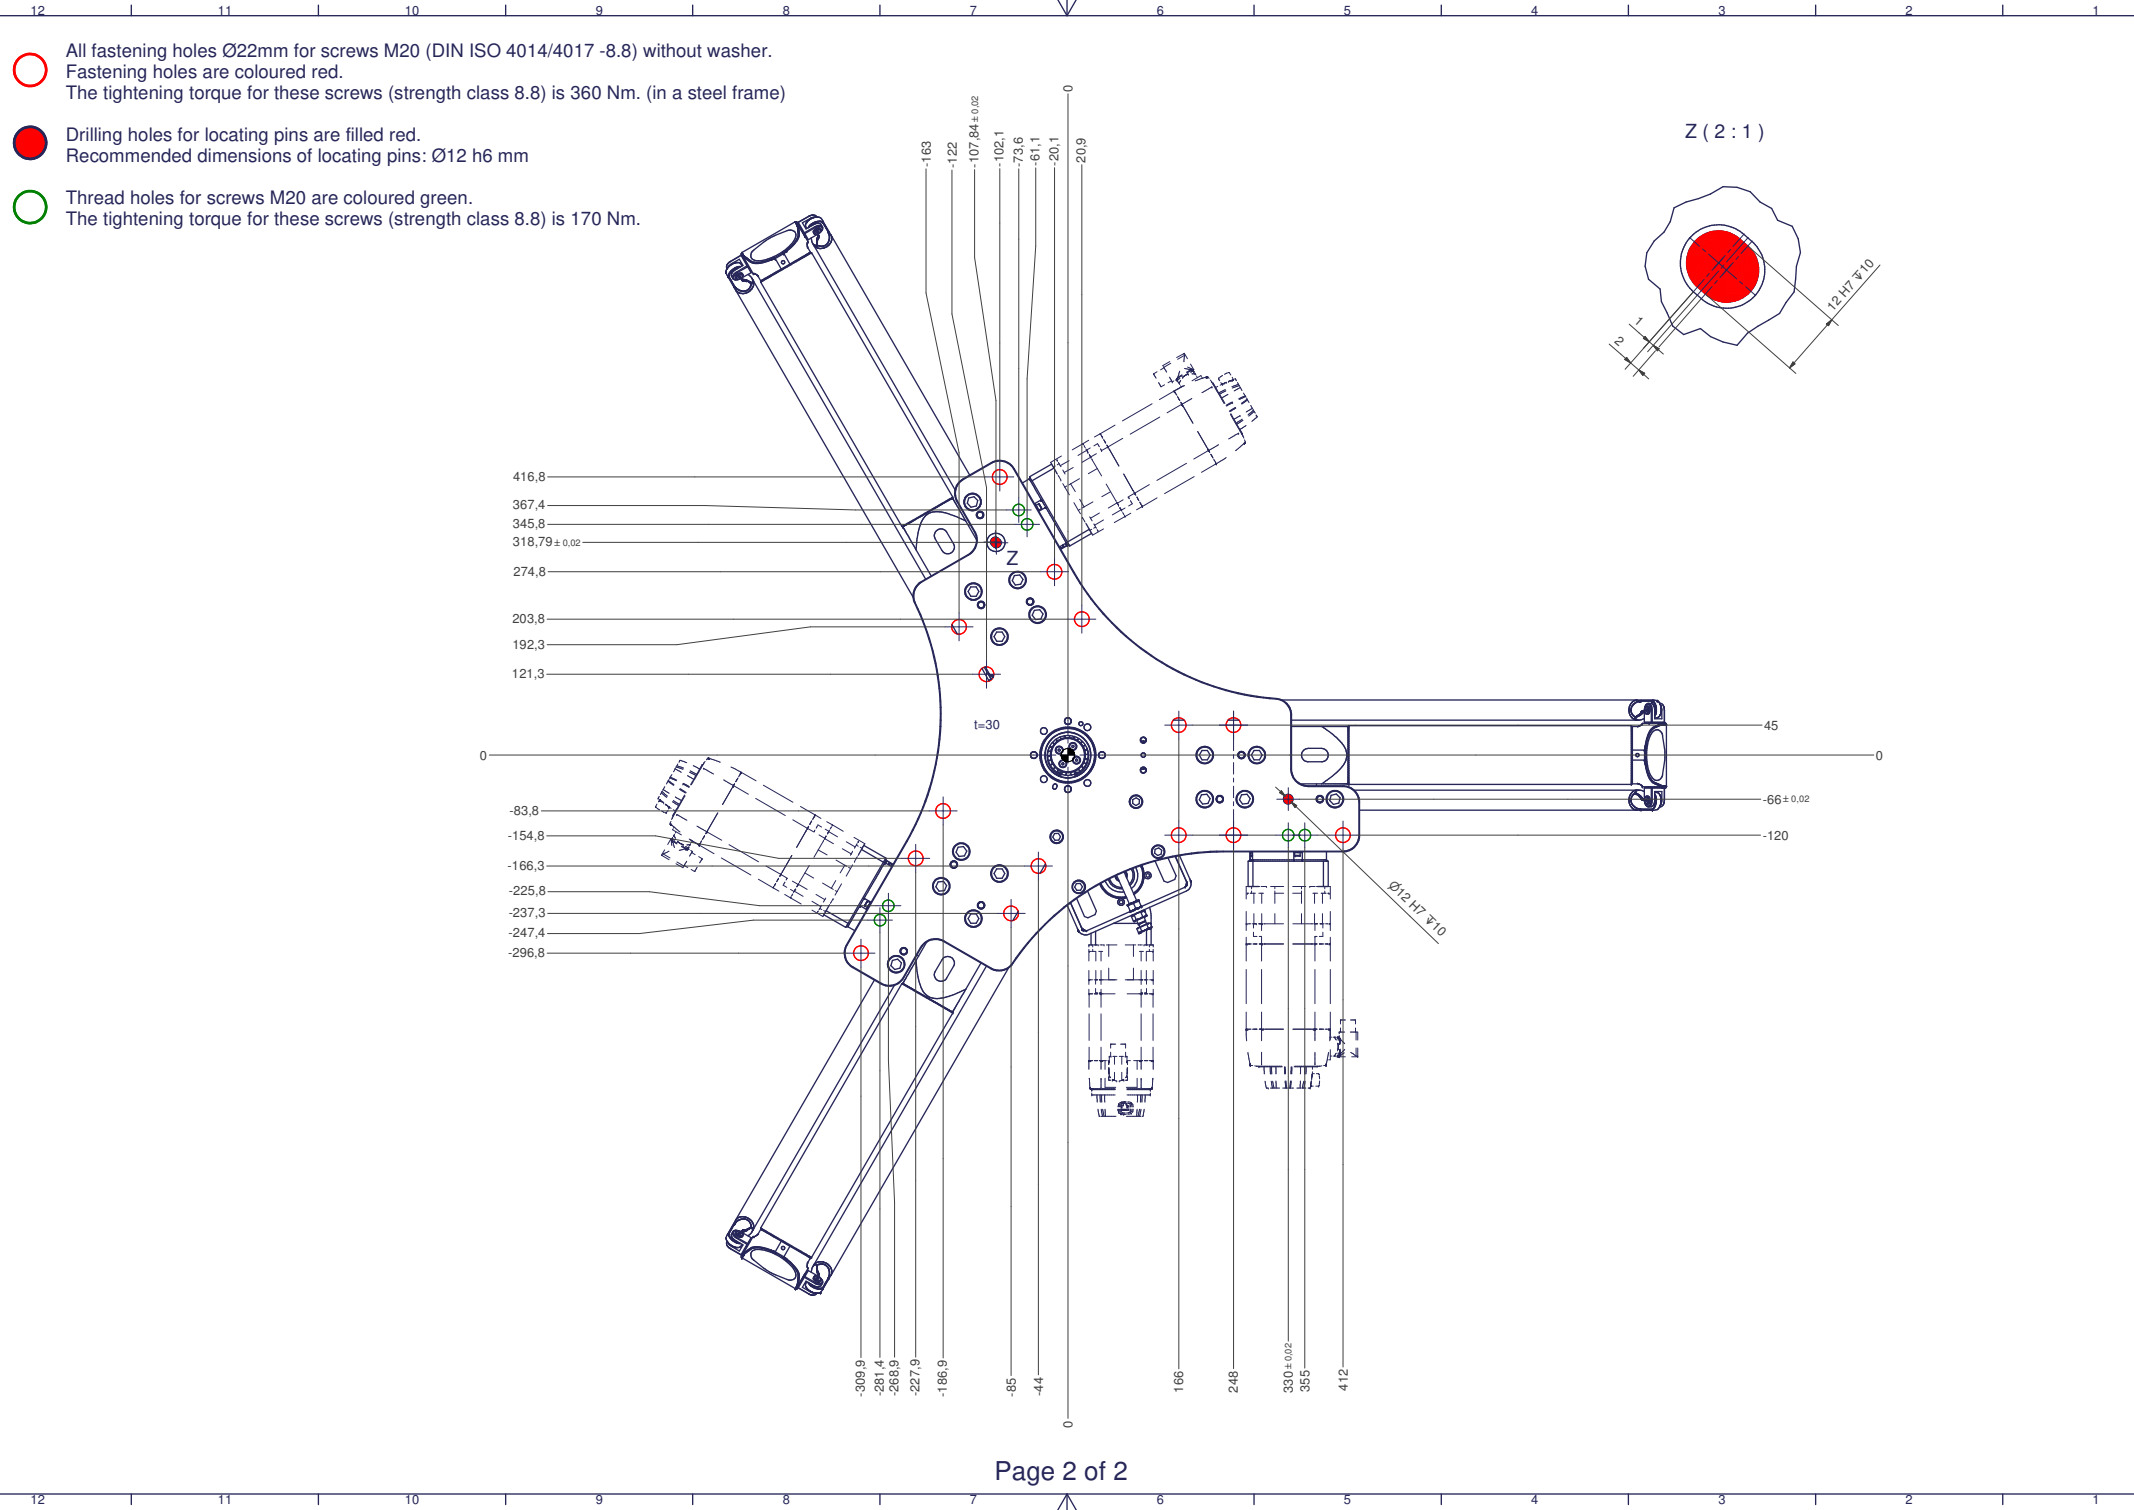

- All fastening holes Ø22mm for screws M20 (DIN ISO 4014/4017 -8.8) without washer.
Fastening holes are coloured red.
The tightening torque for these screws (strength class 8.8) is 360 Nm. (in a steel frame)
- Drilling holes for locating pins are filled red.
Recommended dimensions of locating pins: Ø12 h6 mm
- Thread holes for screws M20 are coloured green.
The tightening torque for these screws (strength class 8.8) is 170 Nm.

Z (2:1)

