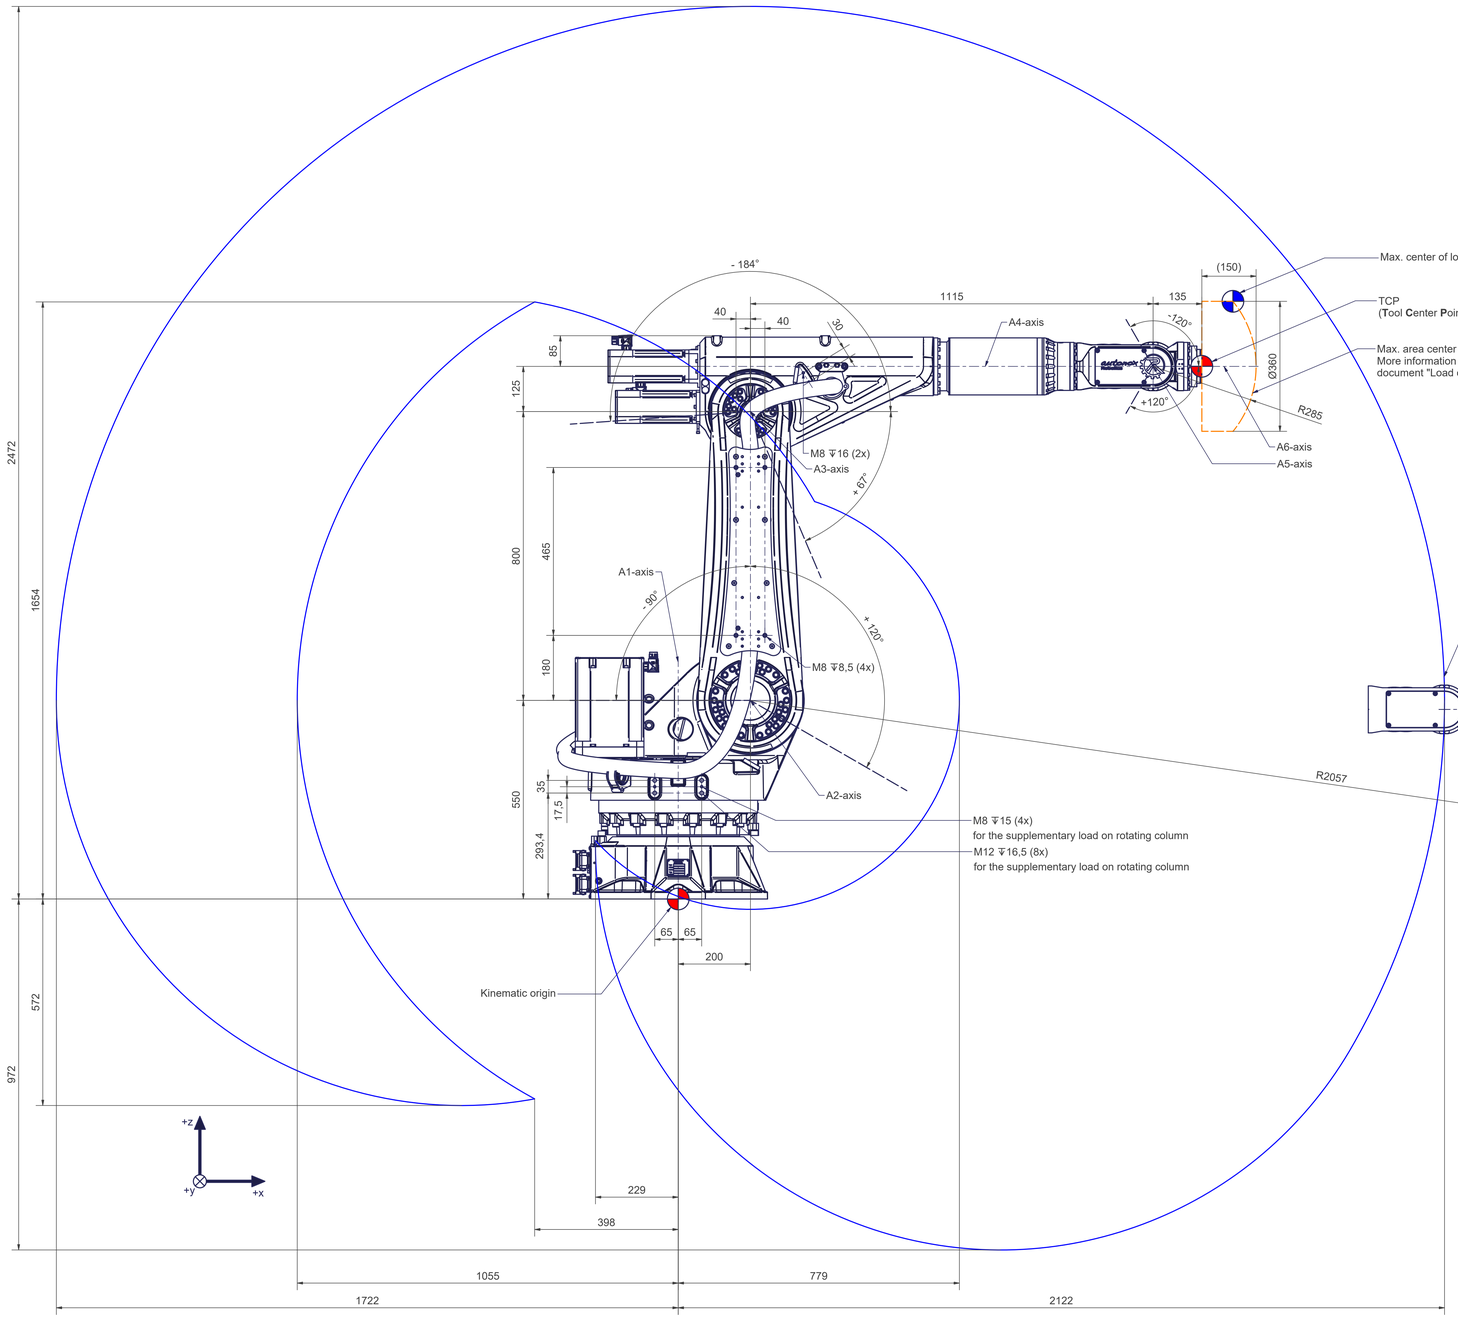

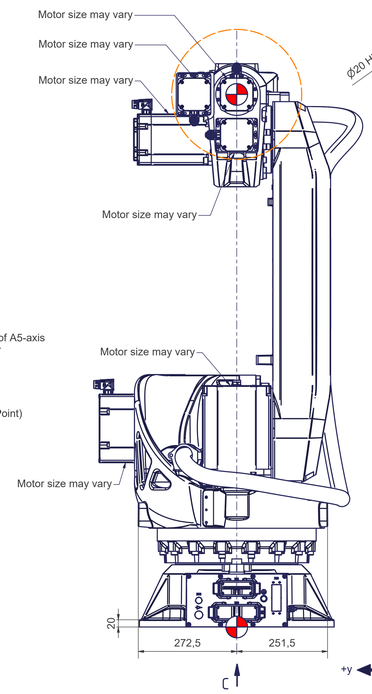

C (1 : 3)
Base frame

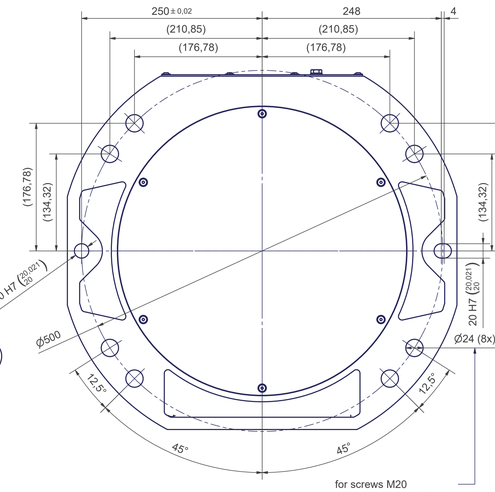



articc6-2257-30kg	
Axes	6
Payload (on TCP)	30 kg
Supplementary load on arm	40 kg
Supplementary load on rotating column	70 kg
Reach	2257 mm
Mounting position	Floor, ceiling

Motion	
Axes	Range fully usable
A1	± 185°
A2	- 90° / + 120° (*)
A3	- 184° / + 67° (*)
A4	Mechanical endless (**)
A5	± 120°
A6	Mechanical endless (**)

More information can be found in the document "calibration dimensions"

(*) only if the axis 1 motor doesn't exceed a length of 250 mm, otherwise these values must be reduced to avoid any risk of collision

(**) control system dependent

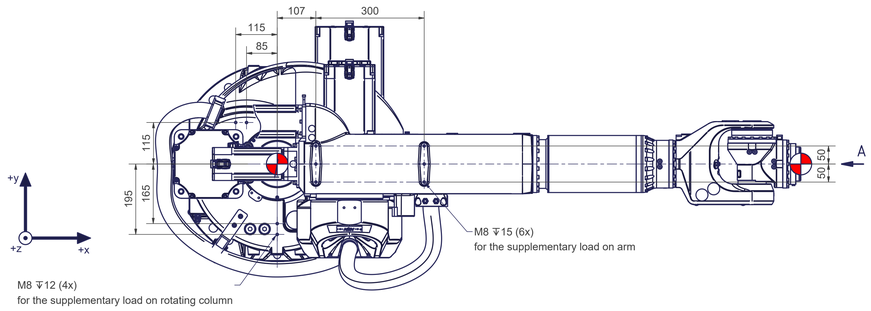

A (1 : 1)
Tool mounting flange A6

B-B



Connecting dimensions,
valid for article numbers AT_00006 and AT_00006-01

kg		
m= kg	A	p= bar
proj. storage surface = m²	P= kW	V̇= l/min
	U= V / Hz / Ph	
	Imax= A	

AT_00006

Rev_05