

Maximum deflection of the upper arm

M6 (4x),  $\nabla 14$   
(one thread hole on each clamp, position see 3D model)

M6 (4x),  $\nabla 14$   
(one thread hole on each clamp, position see 3D model)

Tool Center Point  
TCP (on the plane of the flange)

TCP - working range

approx. 607

Depending on the drive type

A (1:2)

C-C

Y (2:1)

B (1:3)

Z (1:2)

M6 (6x),  $\nabla 12$   
(to fix tools on top of the tool holder)

Connecting dimensions, valid for article number A\_00889



m= kg	A	p= bar
proj. storage surface = m <sup>2</sup>	P= kW	$\dot{V}$ = l/min
First angle projection	U= V / Hz / Ph	I <sub>max</sub> = A



12 11 10 9 8 7 6 5 4 3 2 1

○ All fastening holes  $\varnothing 17,5$  mm for screws M16 (DIN ISO 4014/4017 -8.8) without washers. Fastening holes are coloured red.

● Drilling holes for locating pins are filled red. Recommended dimensions of locating pins:  $\varnothing 12$  h6 ( $\begin{smallmatrix} 12 \\ 11,989 \end{smallmatrix}$ ).

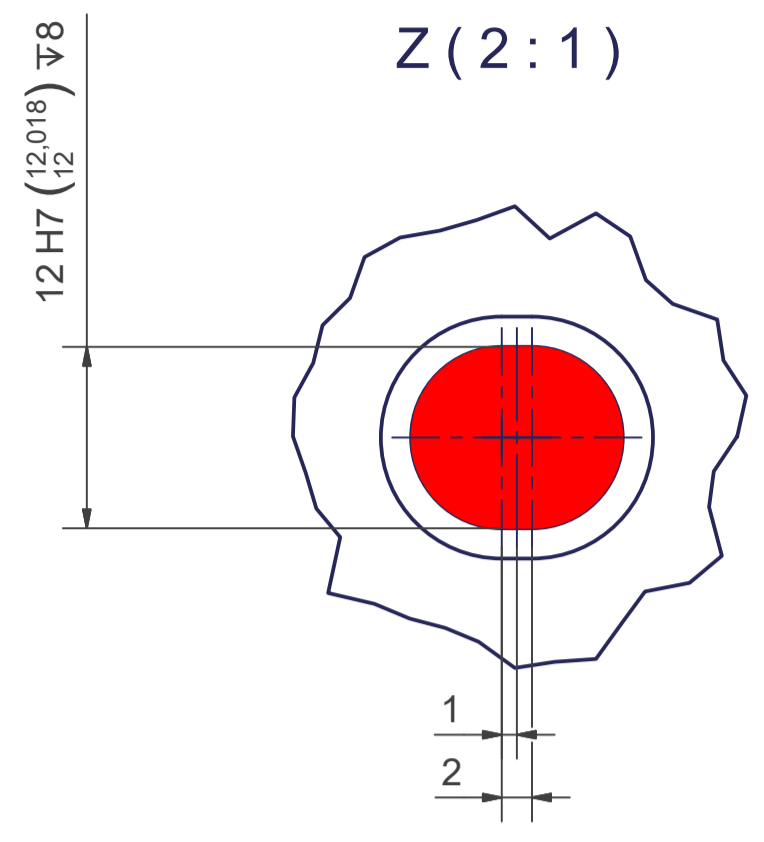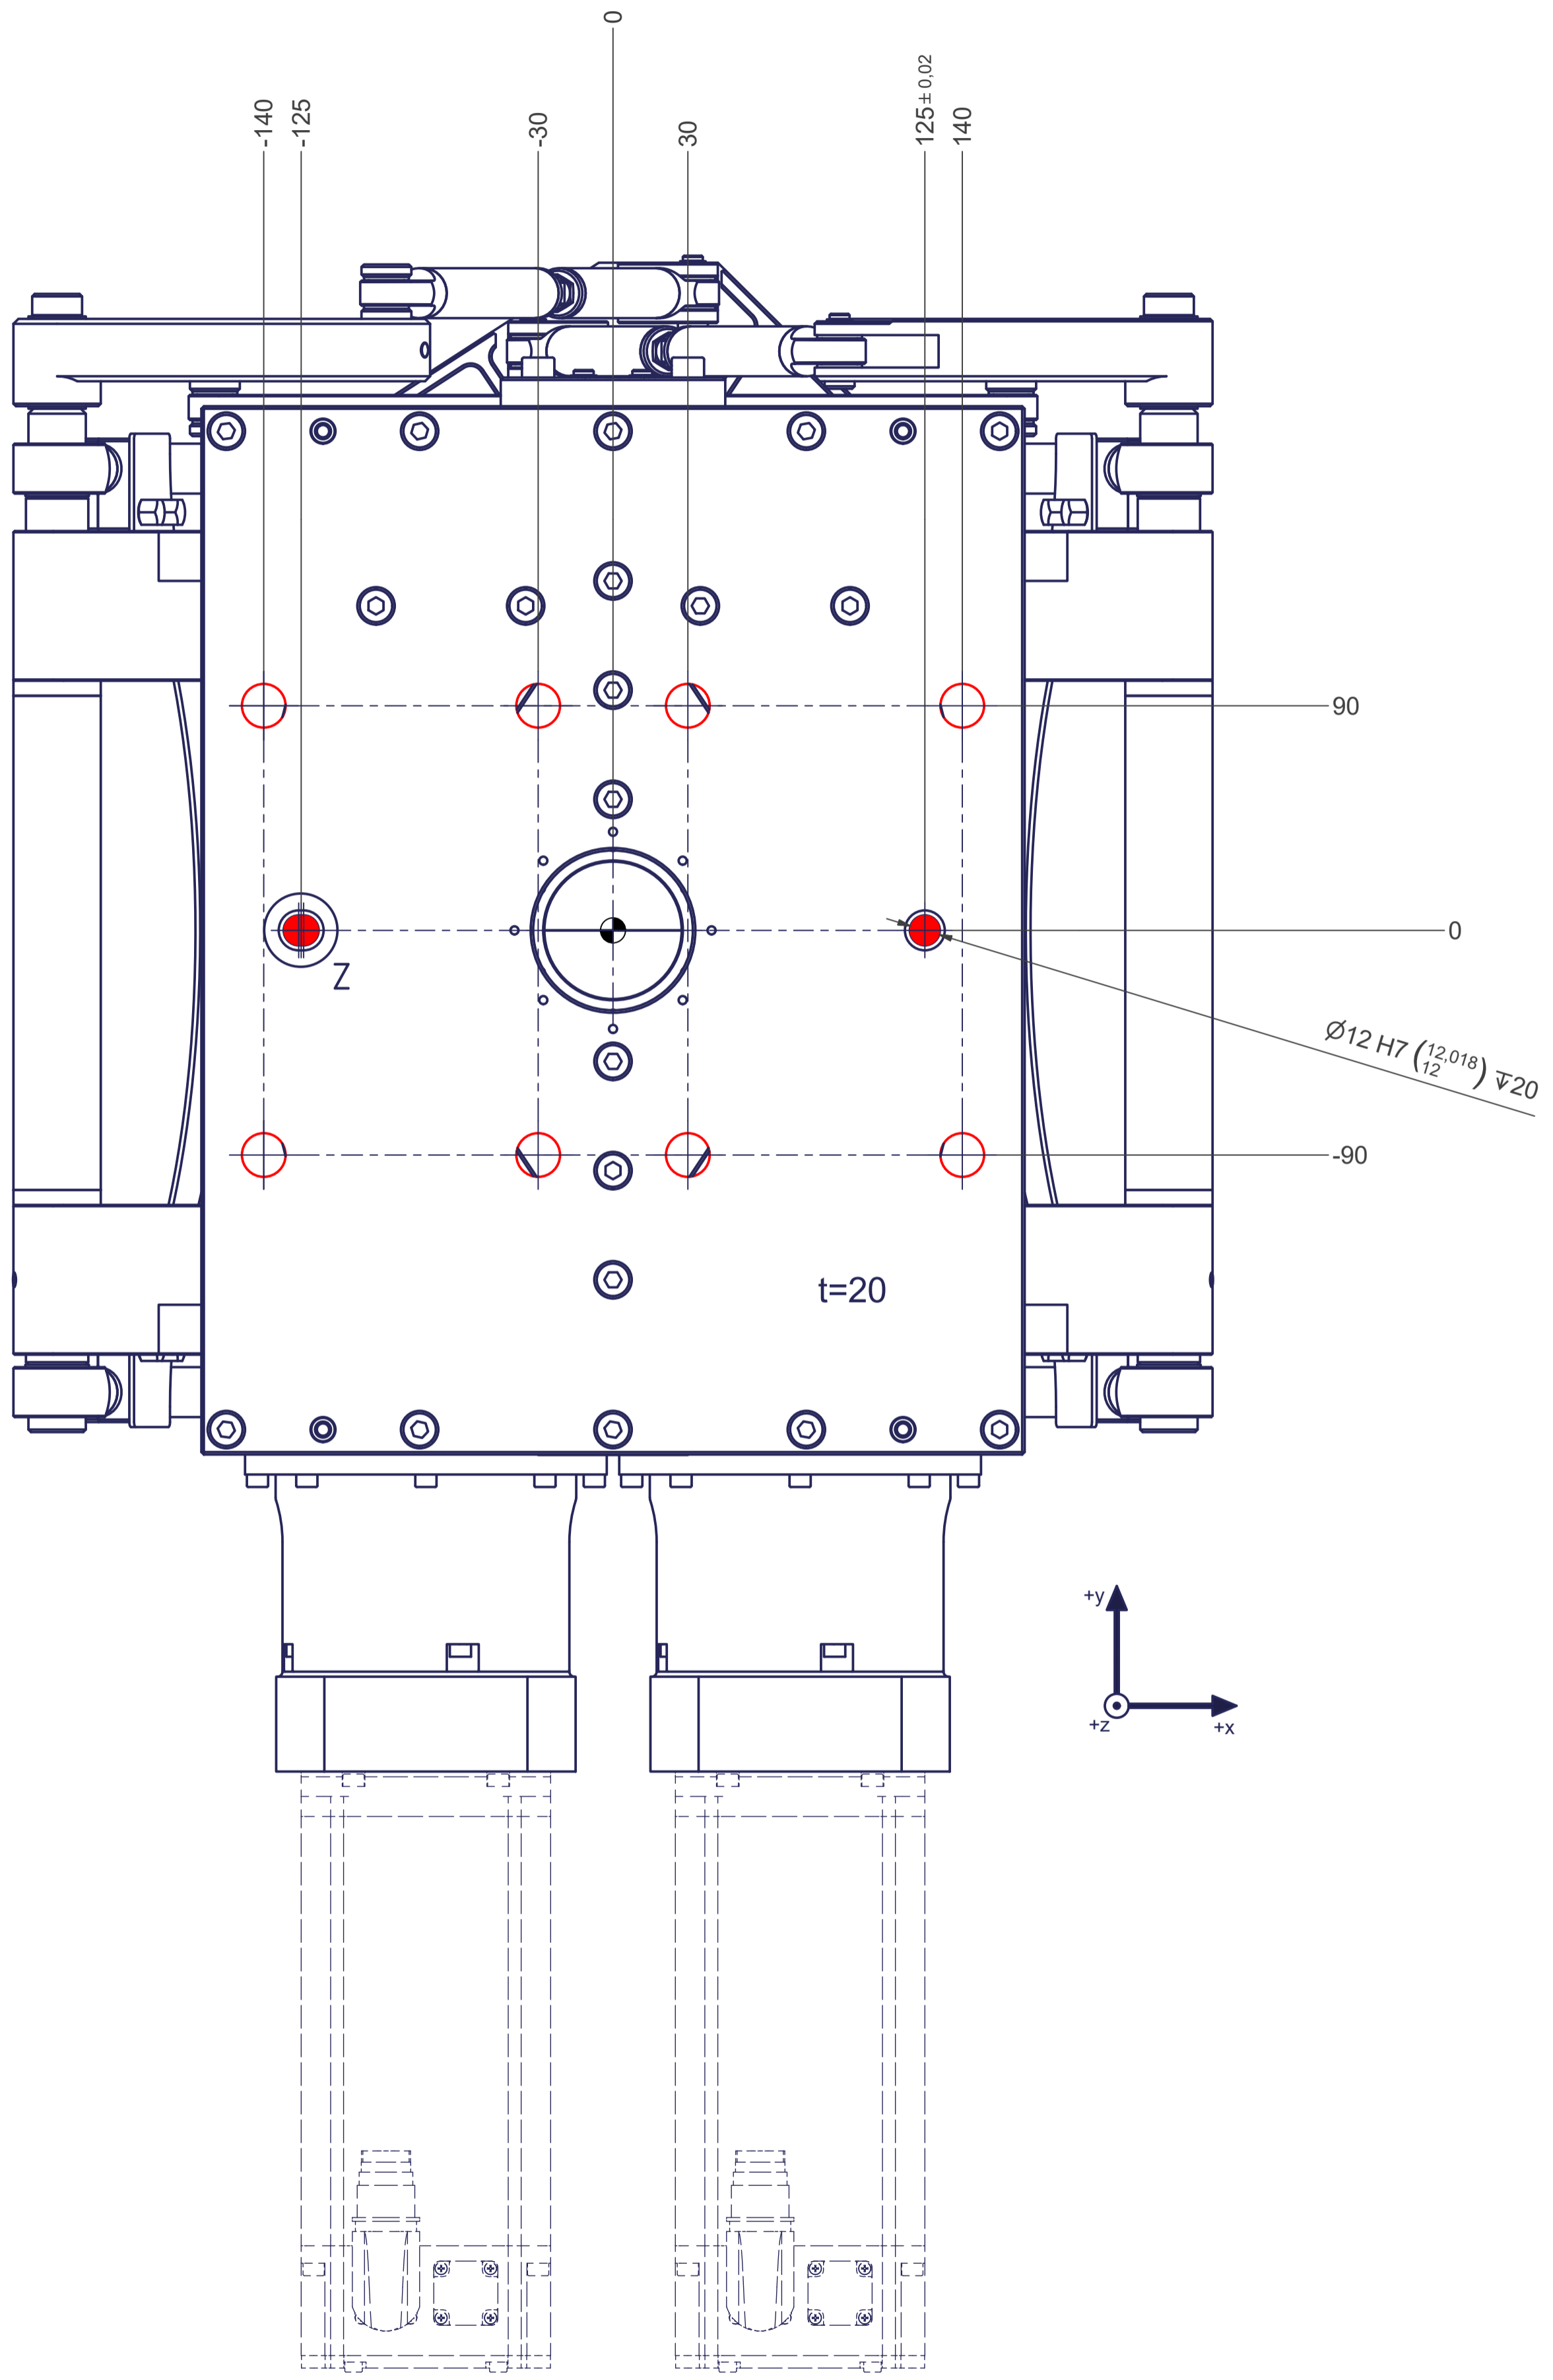

12 11 10 9 8 7 6 5 4 3 2 1