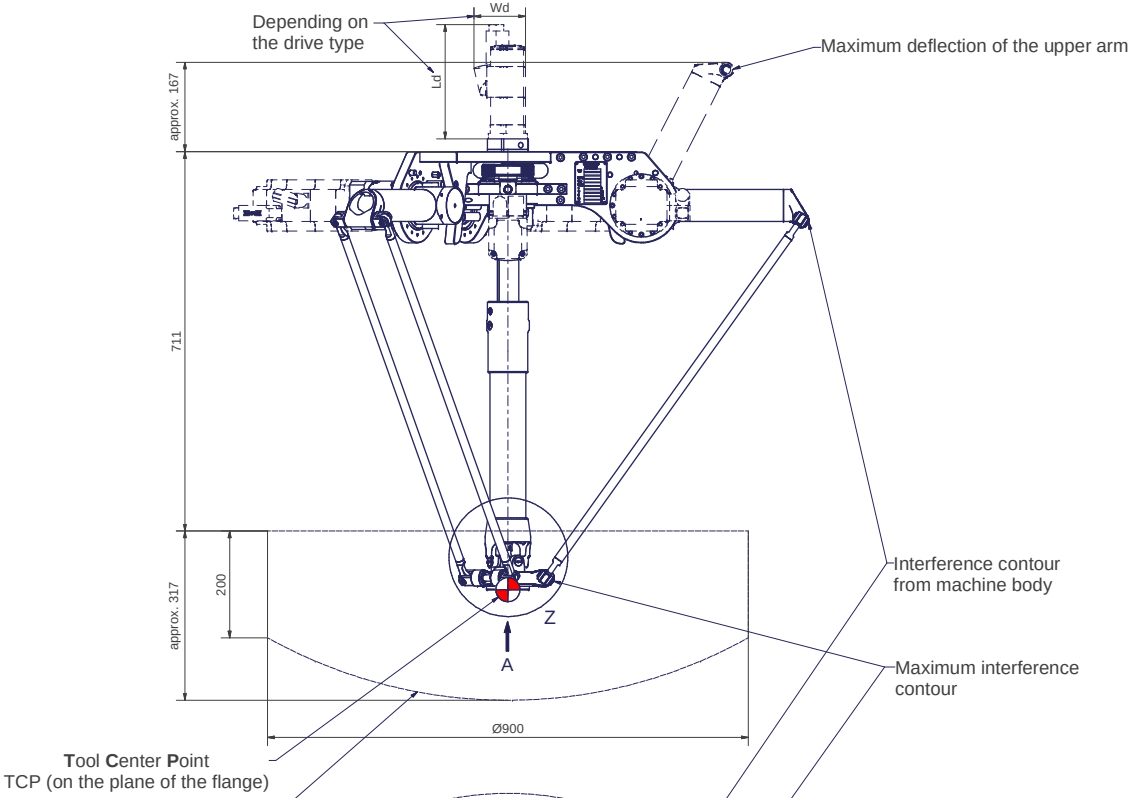

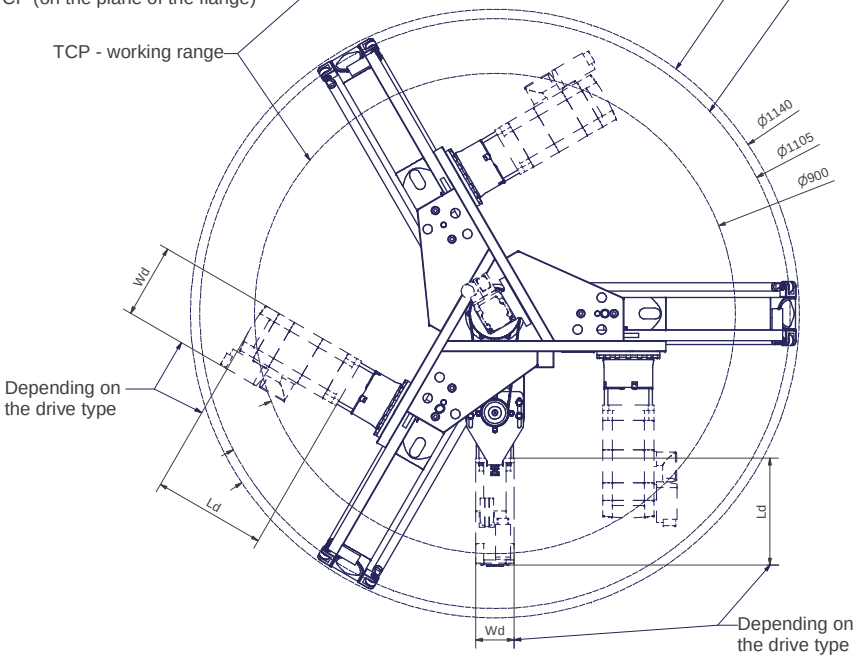

Z (1 : 2)



A (1 : 1)

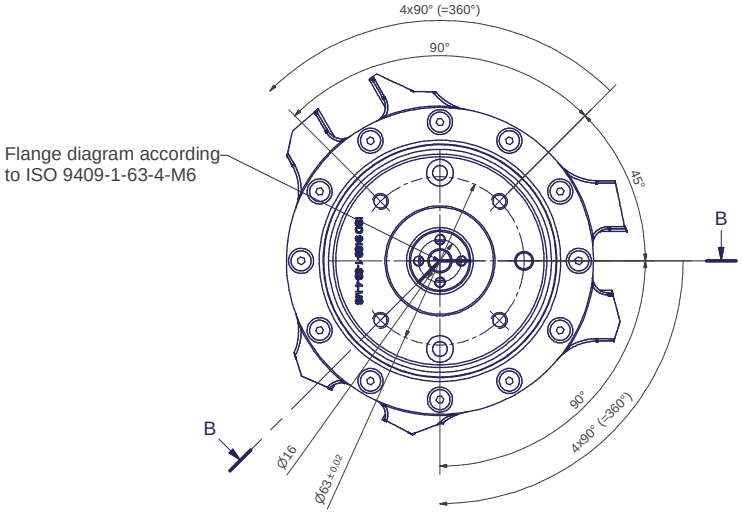

B-B

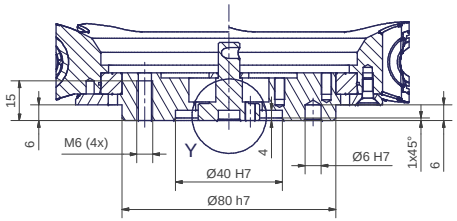

Y (2 : 1)



The T1-rotation has to be beared in the gripper: there is axial- and tilting clearance in the T1-flange avoiding overdefined system when mounted on the gripper.

kg		
m= kg	A	p= bar V̇= l/min
projected storage surface = m²	P= kW U= V / Hz / Ph Imax= A	autonox Robotics

Valid for article number A_00037-T1

MT_BGR00020960

All fastening holes Ø17,5 mm for screws M16
(DIN ISO 4014/4017 -8.8) without washers.
Fastening holes are coloured red.

Fastening holes filled blue are difficult to access.
We recommend using fastening holes coloured red.
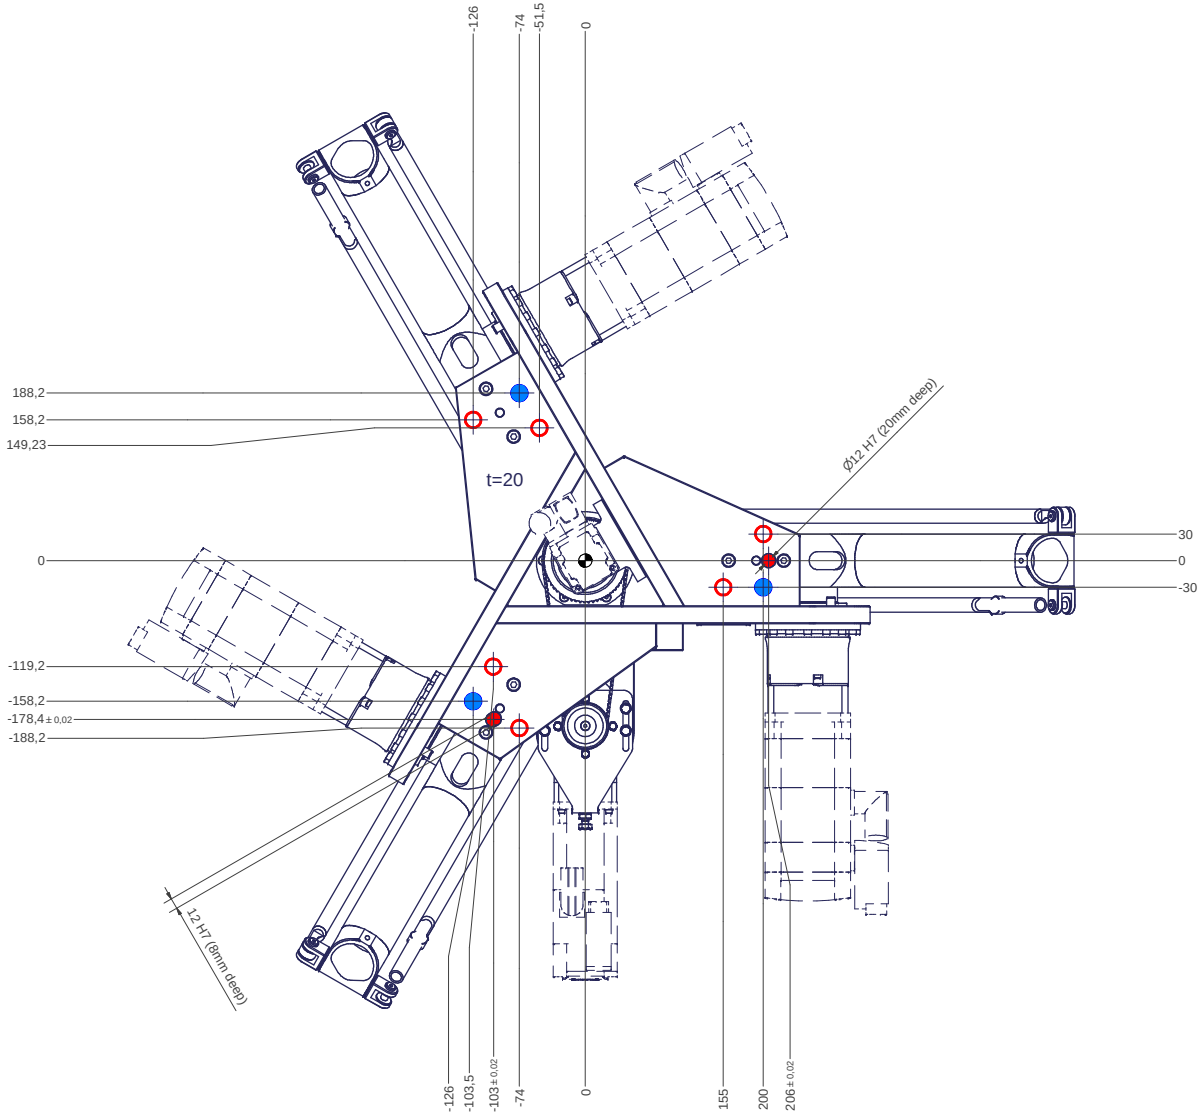
Drilling holes for locating pins are filled red.