




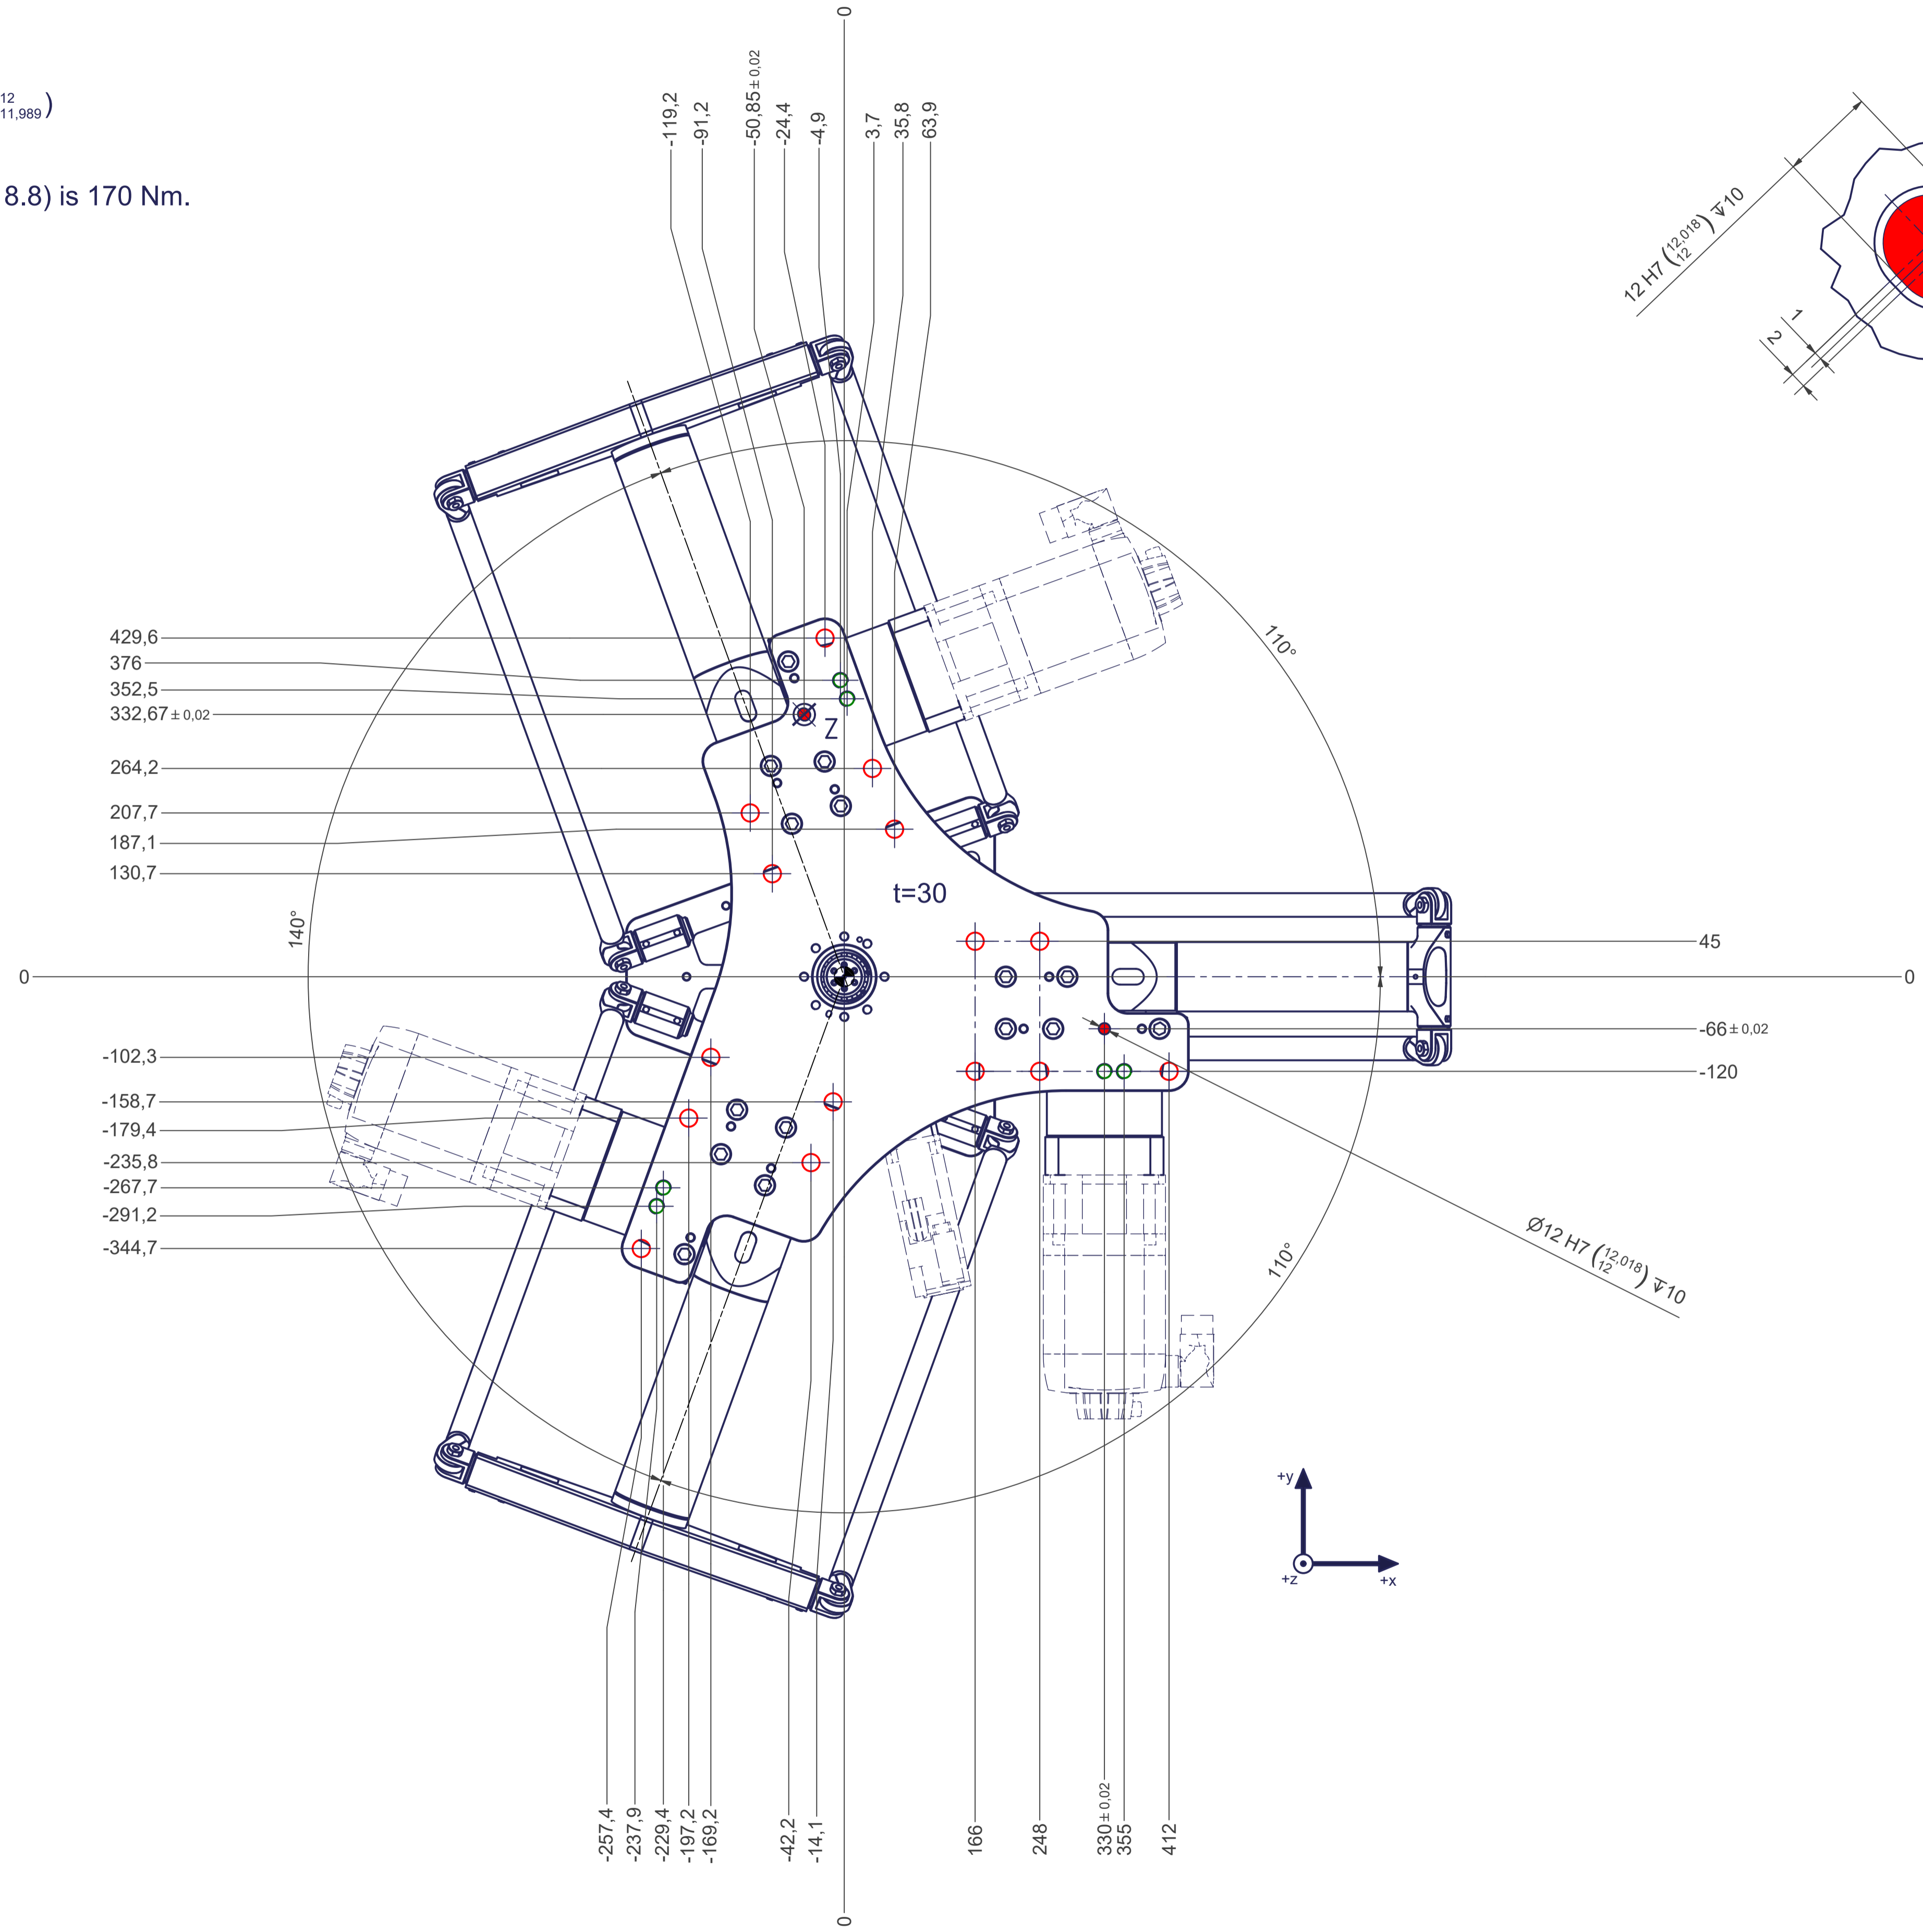
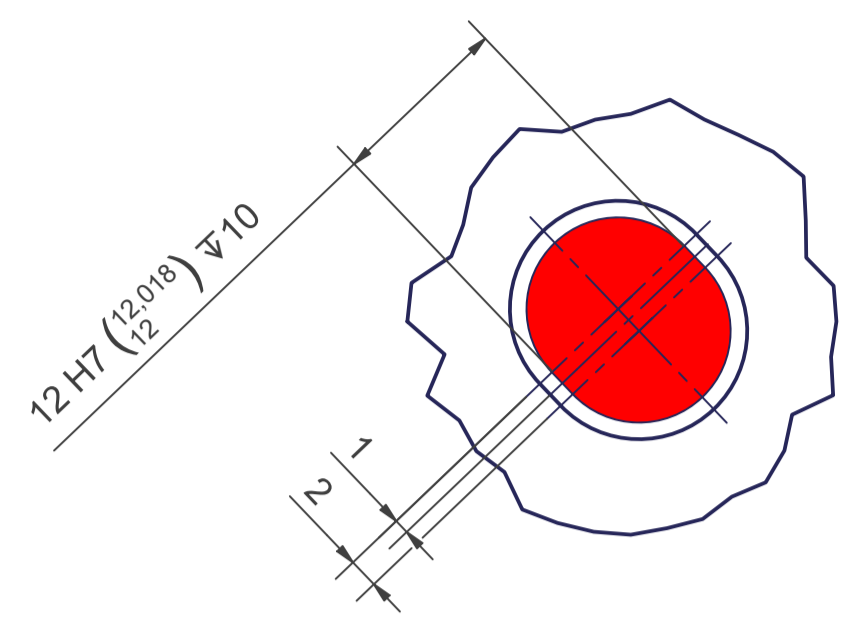
Connecting dimensions, valid for article number A_00659-T1

m= kg	A	p= bar
proj. storage surface = m²		∇= l/min
First angle projection		P= kW
		U= V / Hz / Ph
		I _{max} = A

12 11 10 9 8 7 6 5 4 3 2 1

-  All fastening holes $\varnothing 22$ mm for screws M20 (DIN ISO 4014/4017 -8.8) without washer. Fastening holes are coloured red.
-  Drilling holes for locating pins are filled red. Recommended dimensions for locating pins: $\varnothing 12$ h6 ($\begin{smallmatrix} 12 \\ 11,989 \end{smallmatrix}$)
-  Thread holes for screws M20 are coloured green. The tightening torque for these screws (strength class 8.8) is 170 Nm.

Z (2:1)



12 11 10 9 8 7 6 5 4 3 2 1