


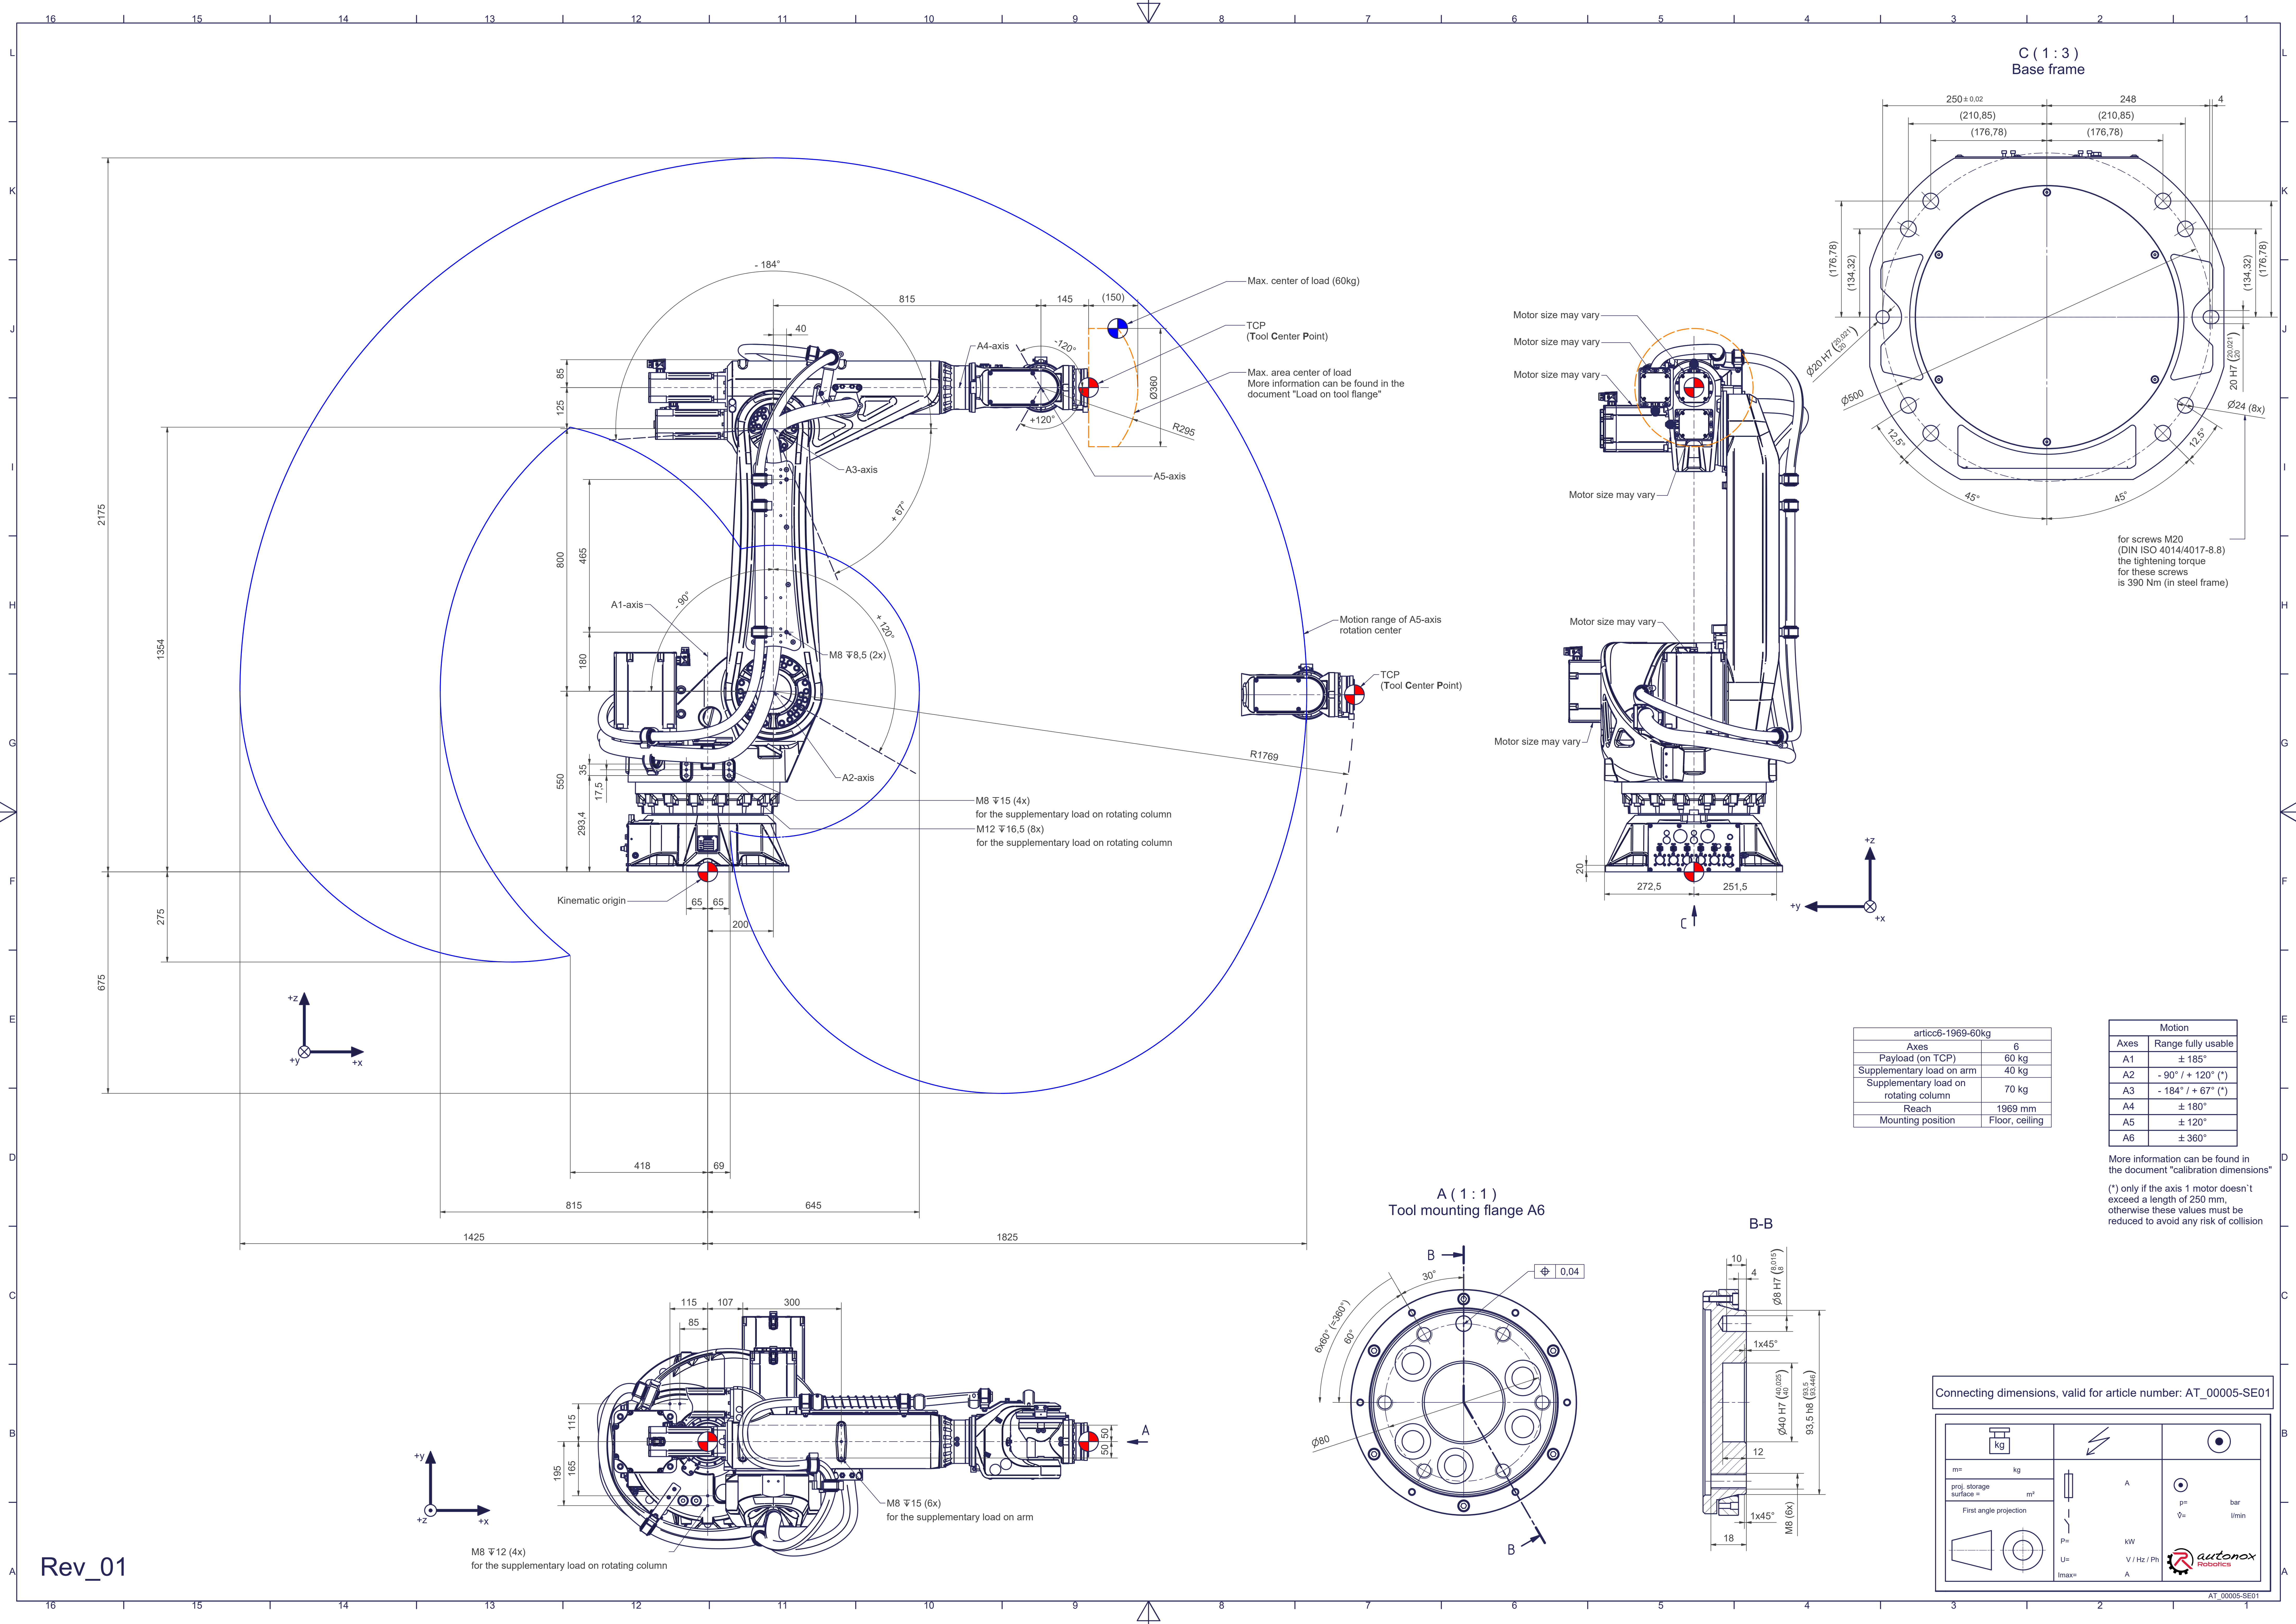

Rev_01

artic6-1969-60kg	
Axes	6
Payload (on TCP)	60 kg
Supplementary load on arm	40 kg
Supplementary load on rotating column	70 kg
Reach	1969 mm
Mounting position	Floor, ceiling

Motion	
Axes	Range fully usable
A1	± 185°
A2	-90° / + 120° (*)
A3	- 184° / + 67° (*)
A4	± 180°
A5	± 120°
A6	± 360°

More information can be found in the document "calibration dimensions"

(*) only if the axis 1 motor doesn't exceed a length of 250 mm, otherwise these values must be reduced to avoid any risk of collision

Connecting dimensions, valid for article number: AT_00005-SE01		
m= kg	A	p= bar
proj. storage surface = m²		ψ= l/min
First angle projection	P= kW	
	U= V / Hz / Ph	
	lmax= A	
AT_00005-SE01		