
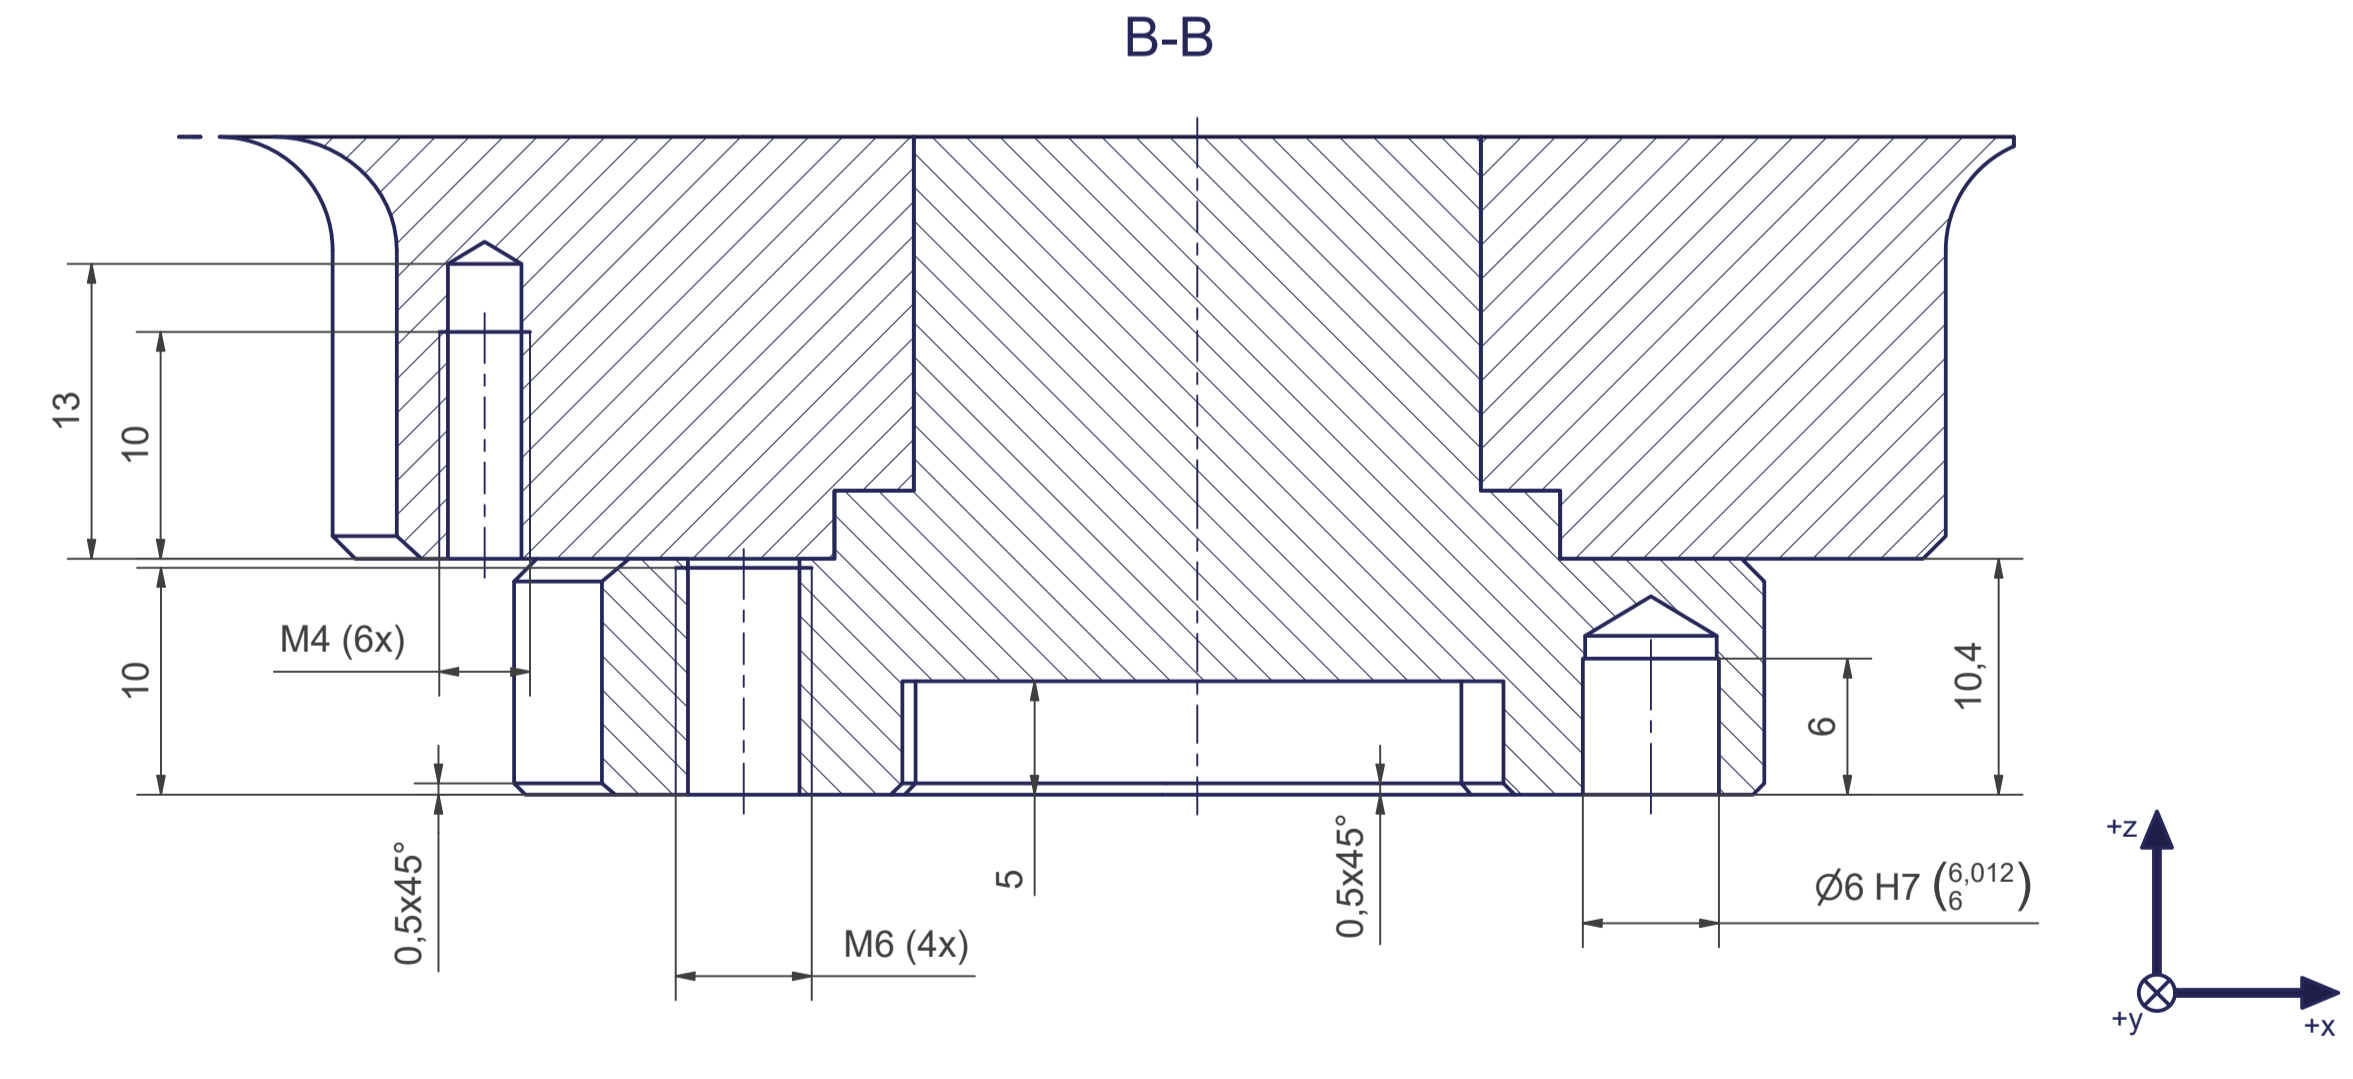
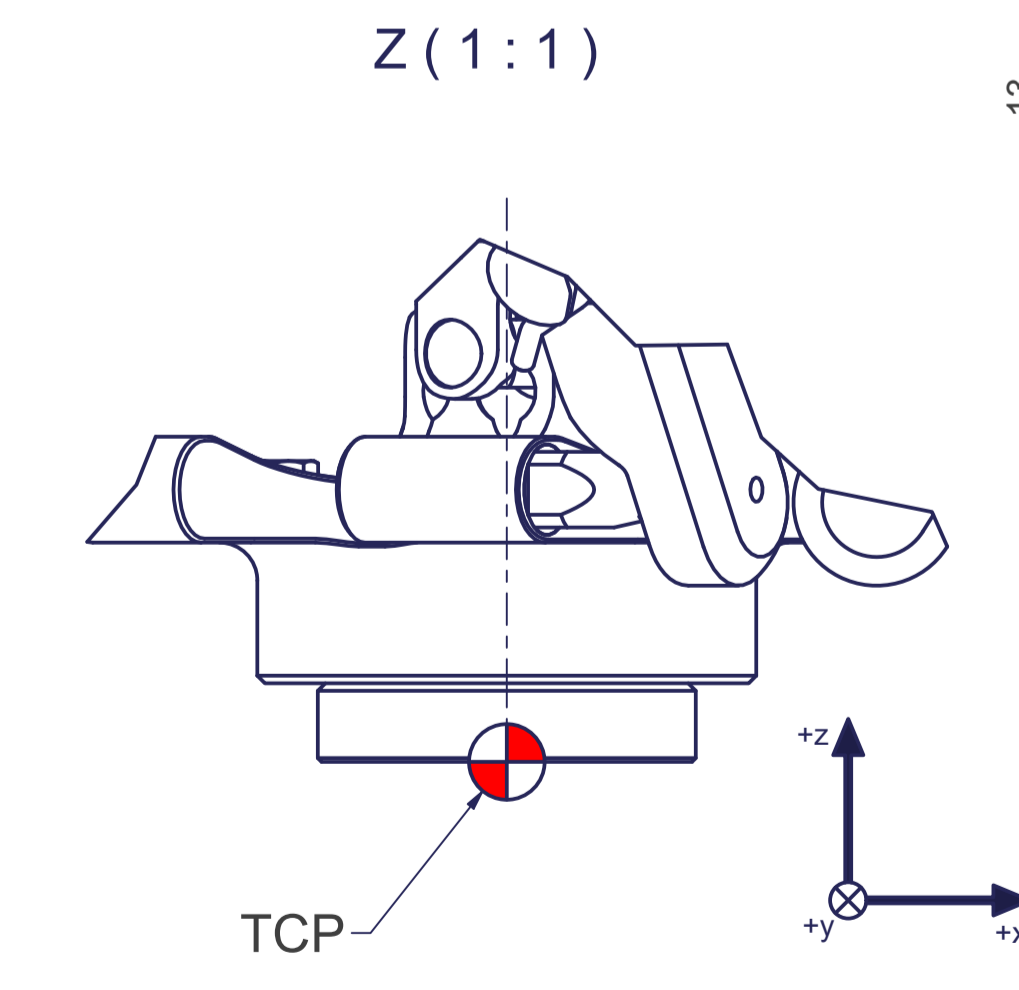
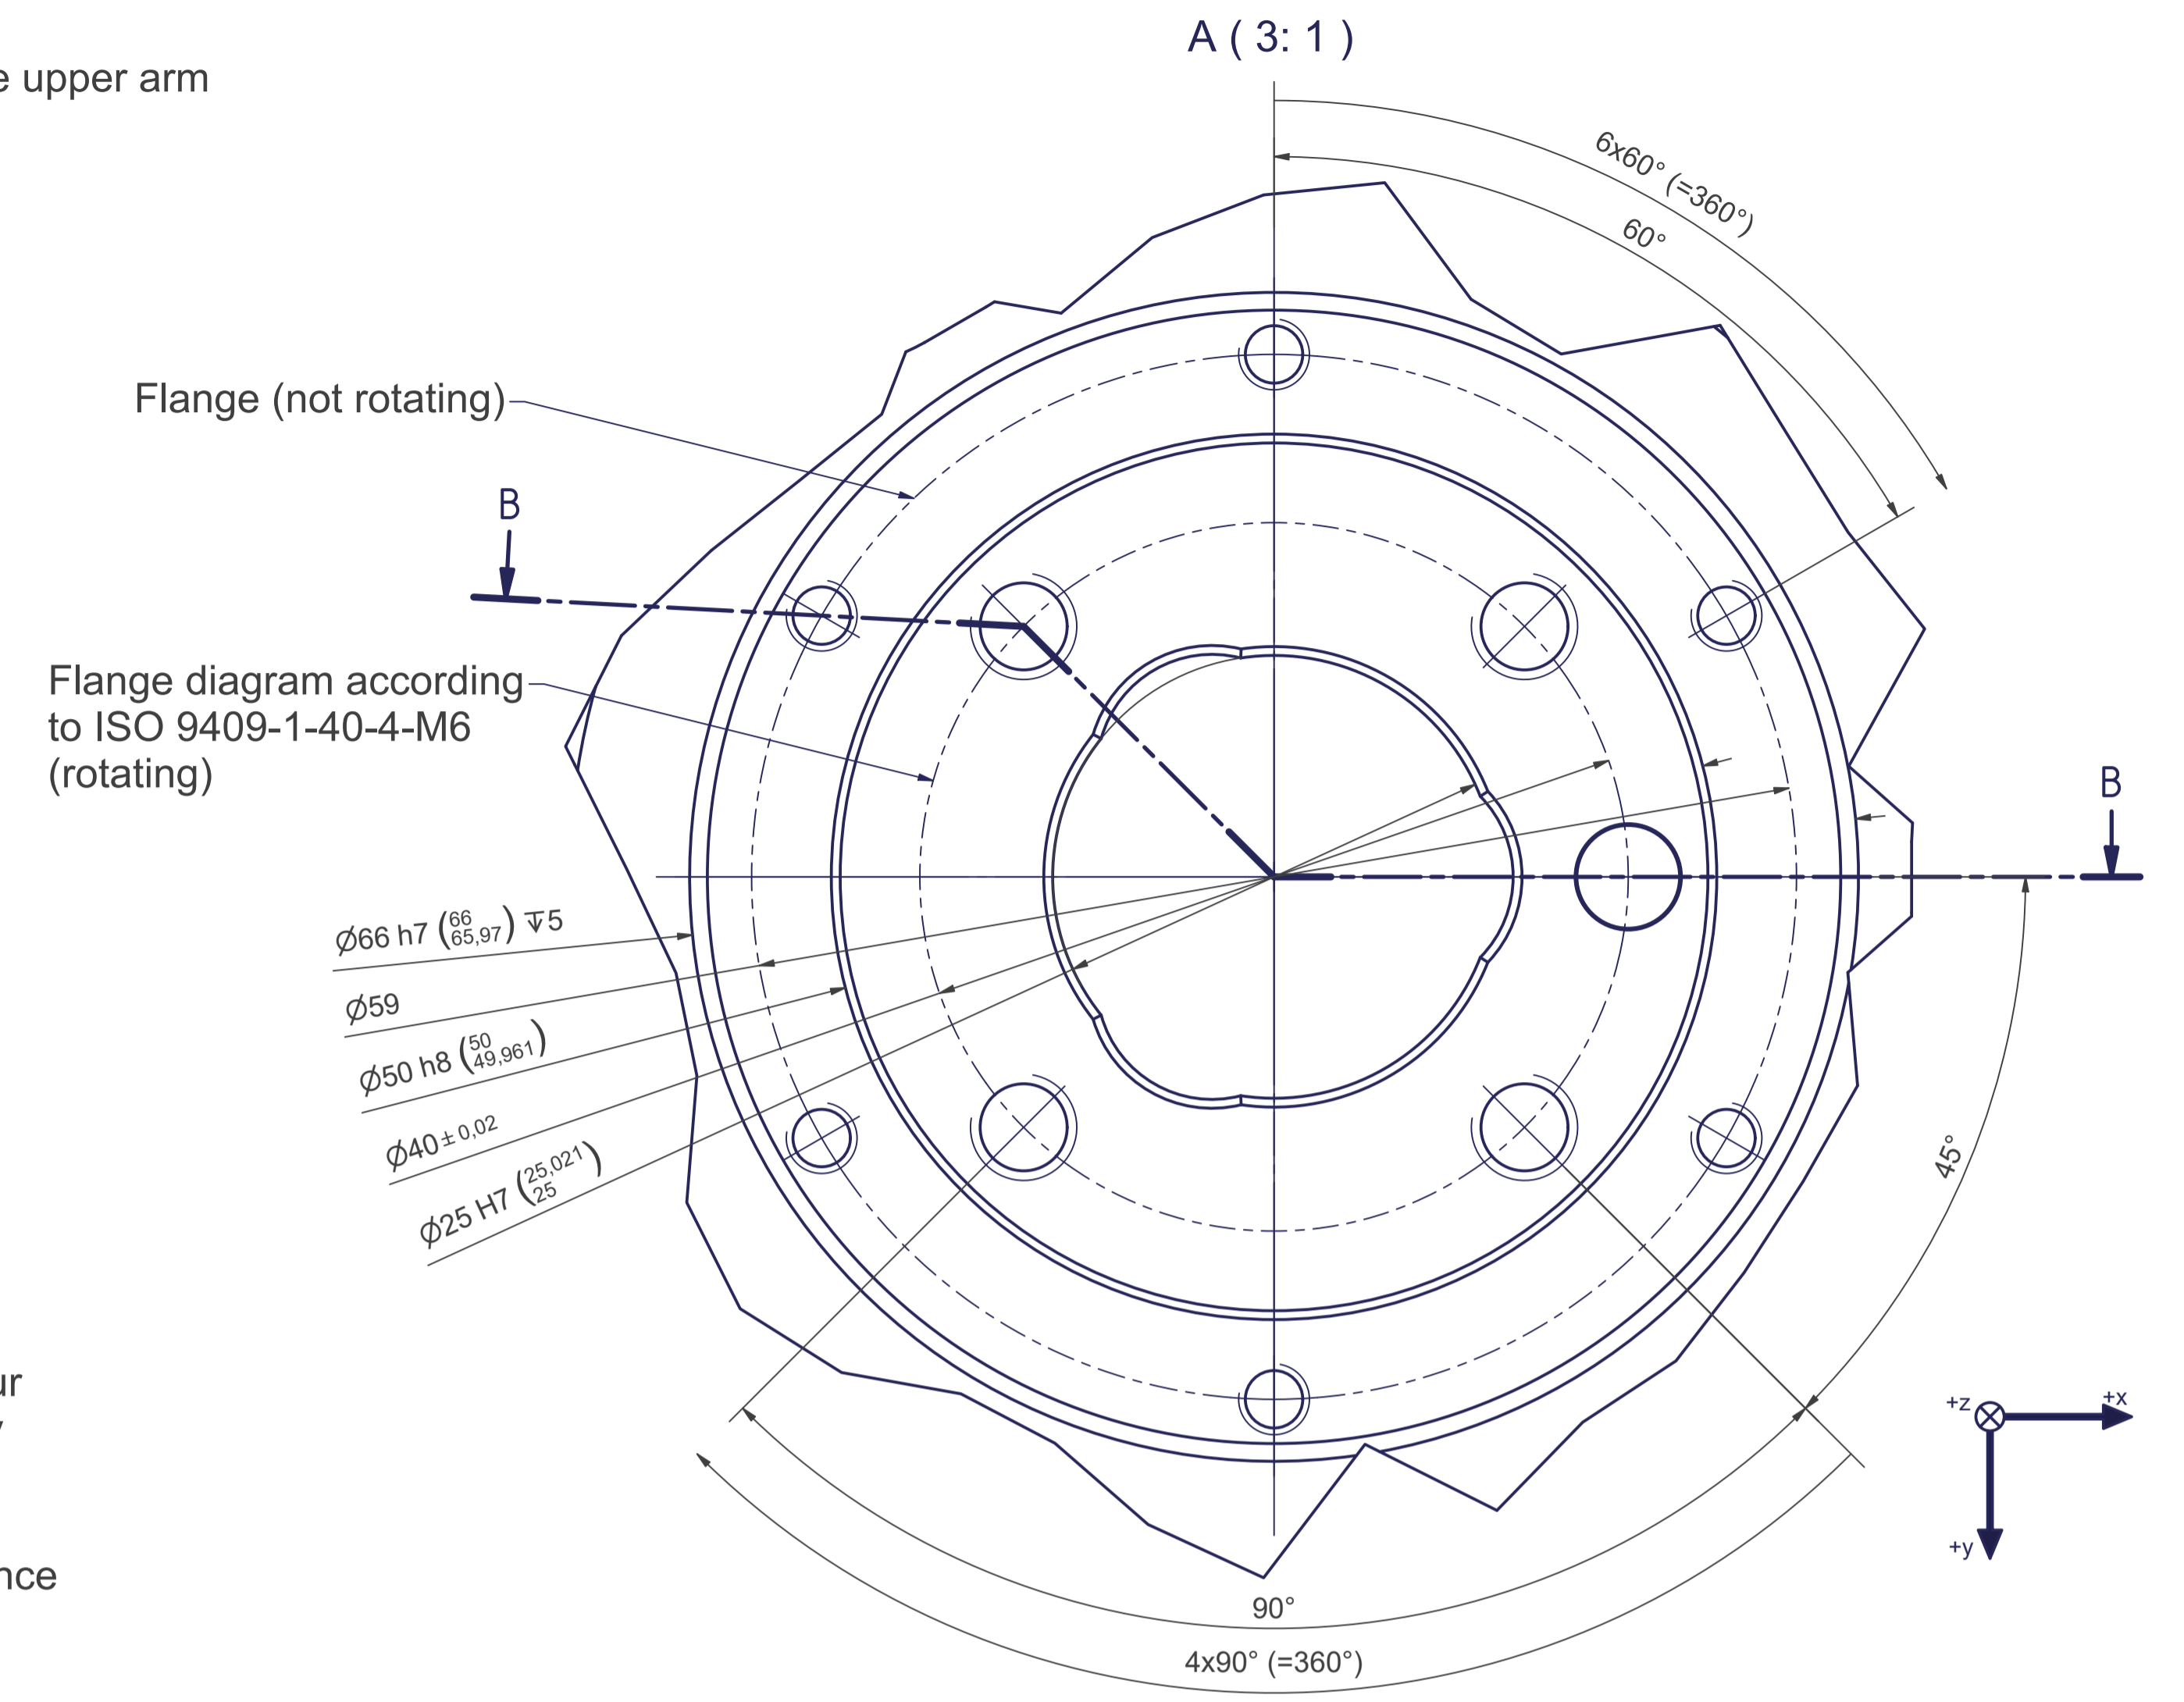


Tool Center Point
TCP (on the plane of the flange)

TCP - working range

Depending on the motor type

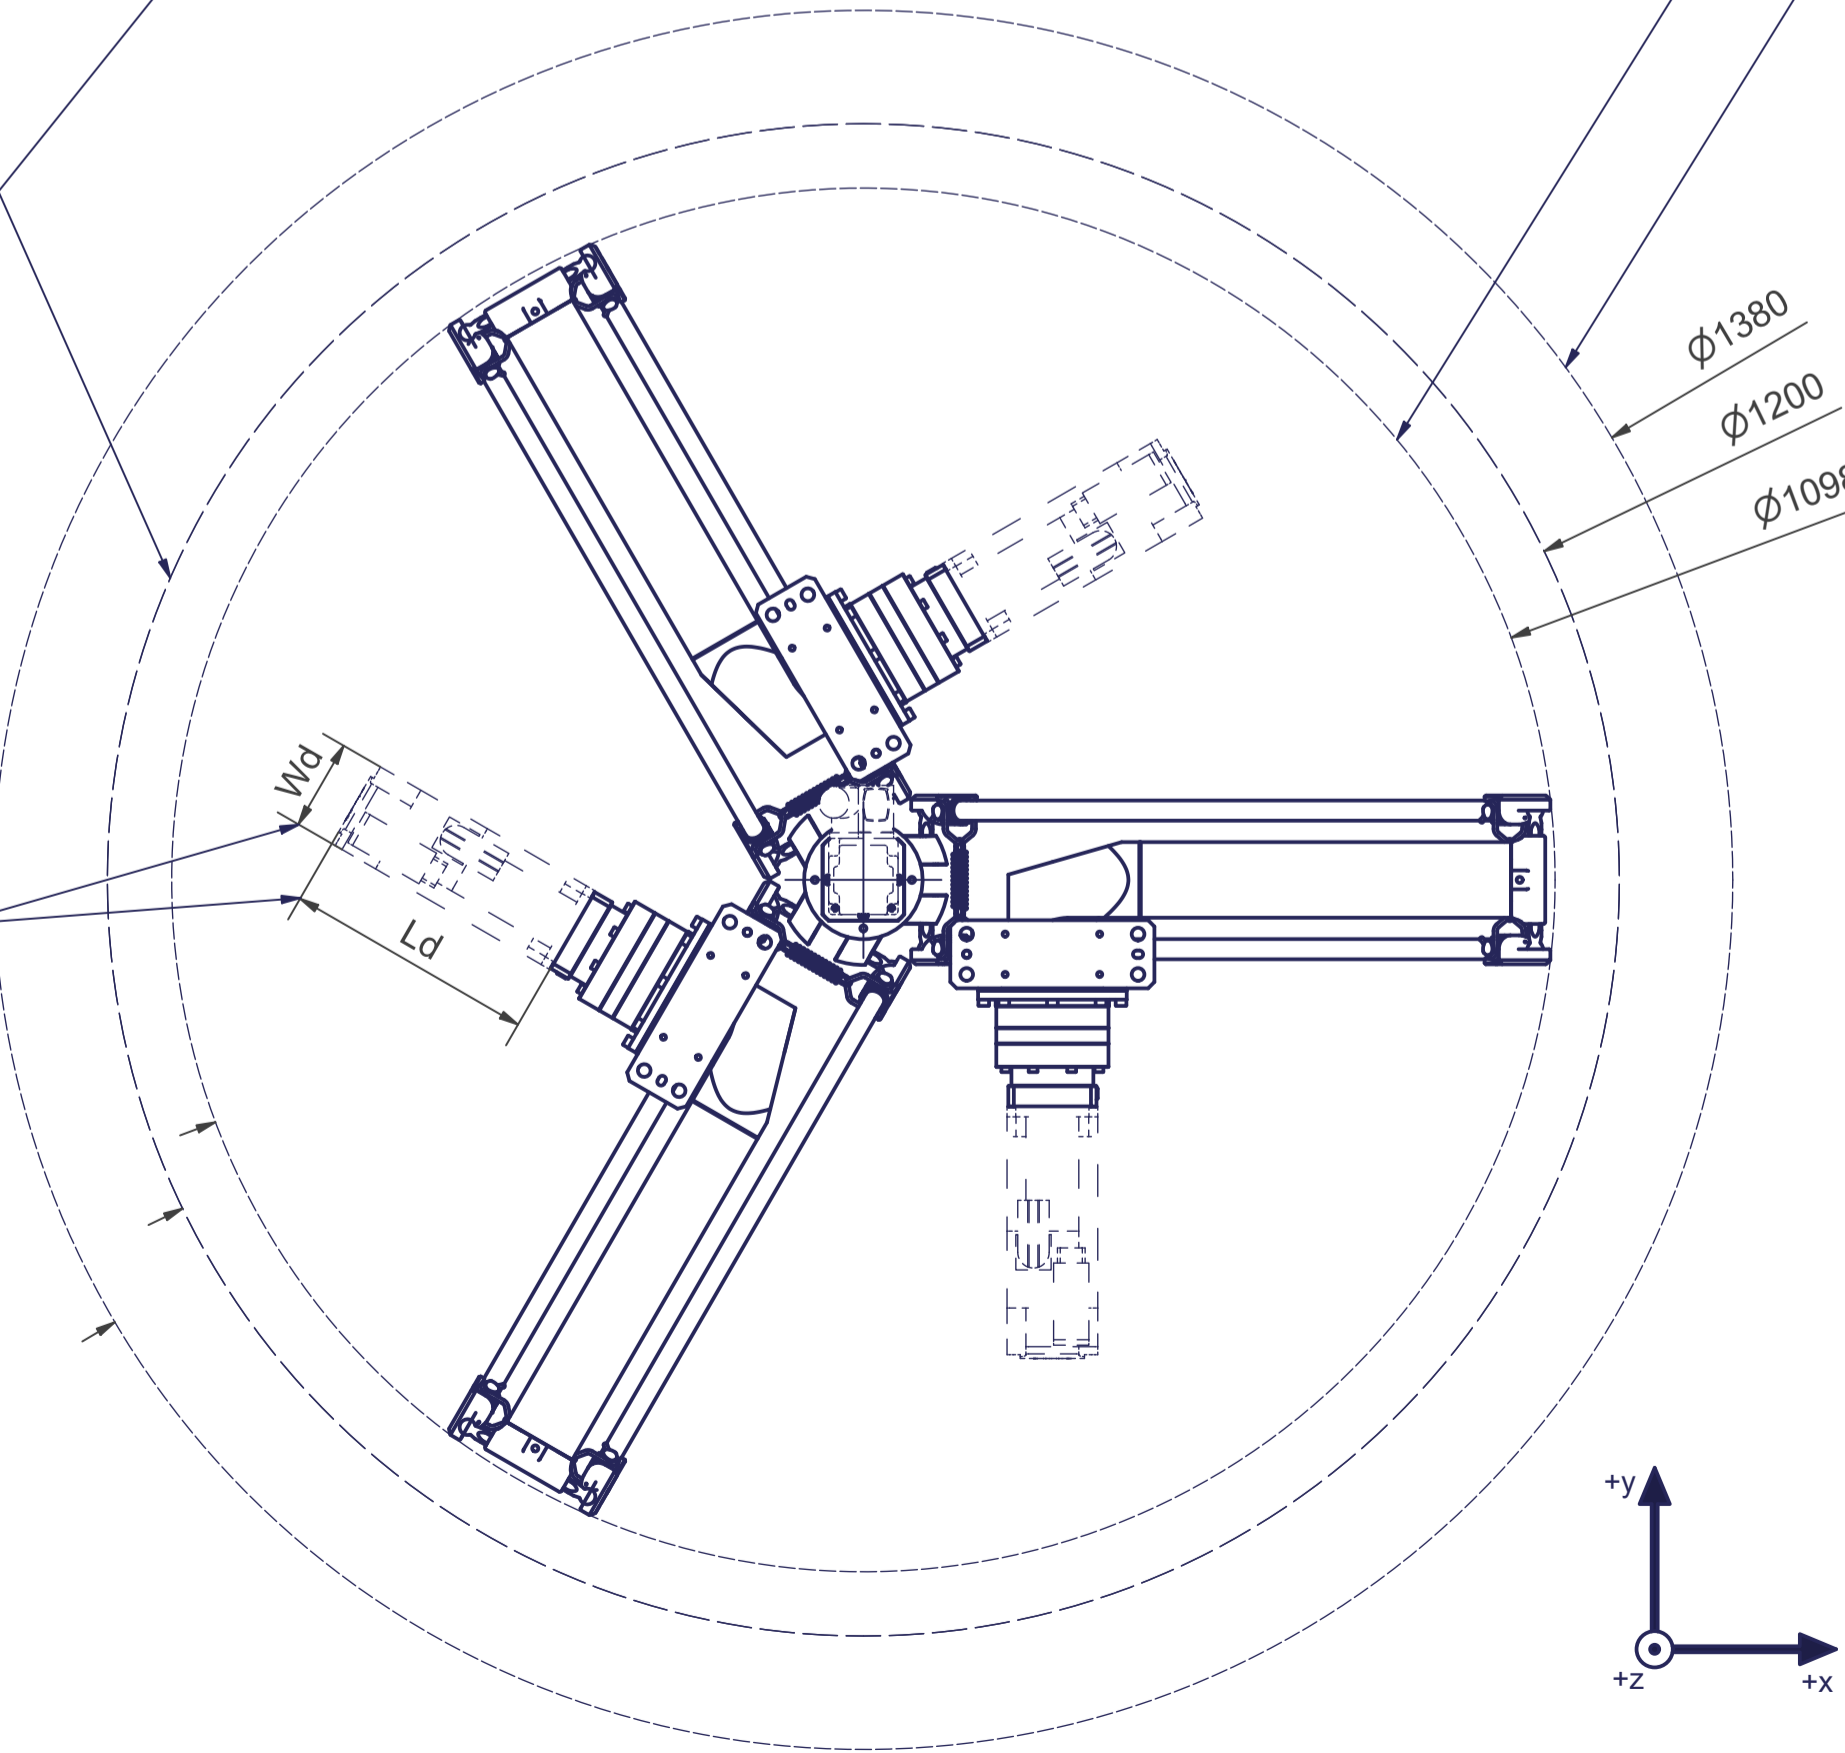

Connecting dimensions,
valid for article number AL_10006

m= kg	A	●= bar
proj. storage surface = m²		∇= l/min
First angle projection	P= kW	
	U= V / Hz / Ph	
	Imax= A	
		autonox lean line

12

11

10

9

8

7

6

5

4

3

2

1

H

H

G

G

F

F

E

E

D

D

C

C

B

B

A

A

12

11

10

9

8

7

6




5

4

3

2

1

-  Thread holes for screws M6 are coloured red.
The tightening torque for these screws (strength class 8.8) is 4,8 Nm.
-  Thread holes for screws M12 are coloured green.
The tightening torque for these screws (strength class 8.8) is 41 Nm.
-  Drilling holes for location pins are filled red.
Recommended dimensions for locating pins: $\text{Ø}6 \text{ h}8 \left(\begin{smallmatrix} 6 \\ 5,982 \end{smallmatrix} \right)$

