



Flange diagram according to ISO 9409-1-40-4-M6

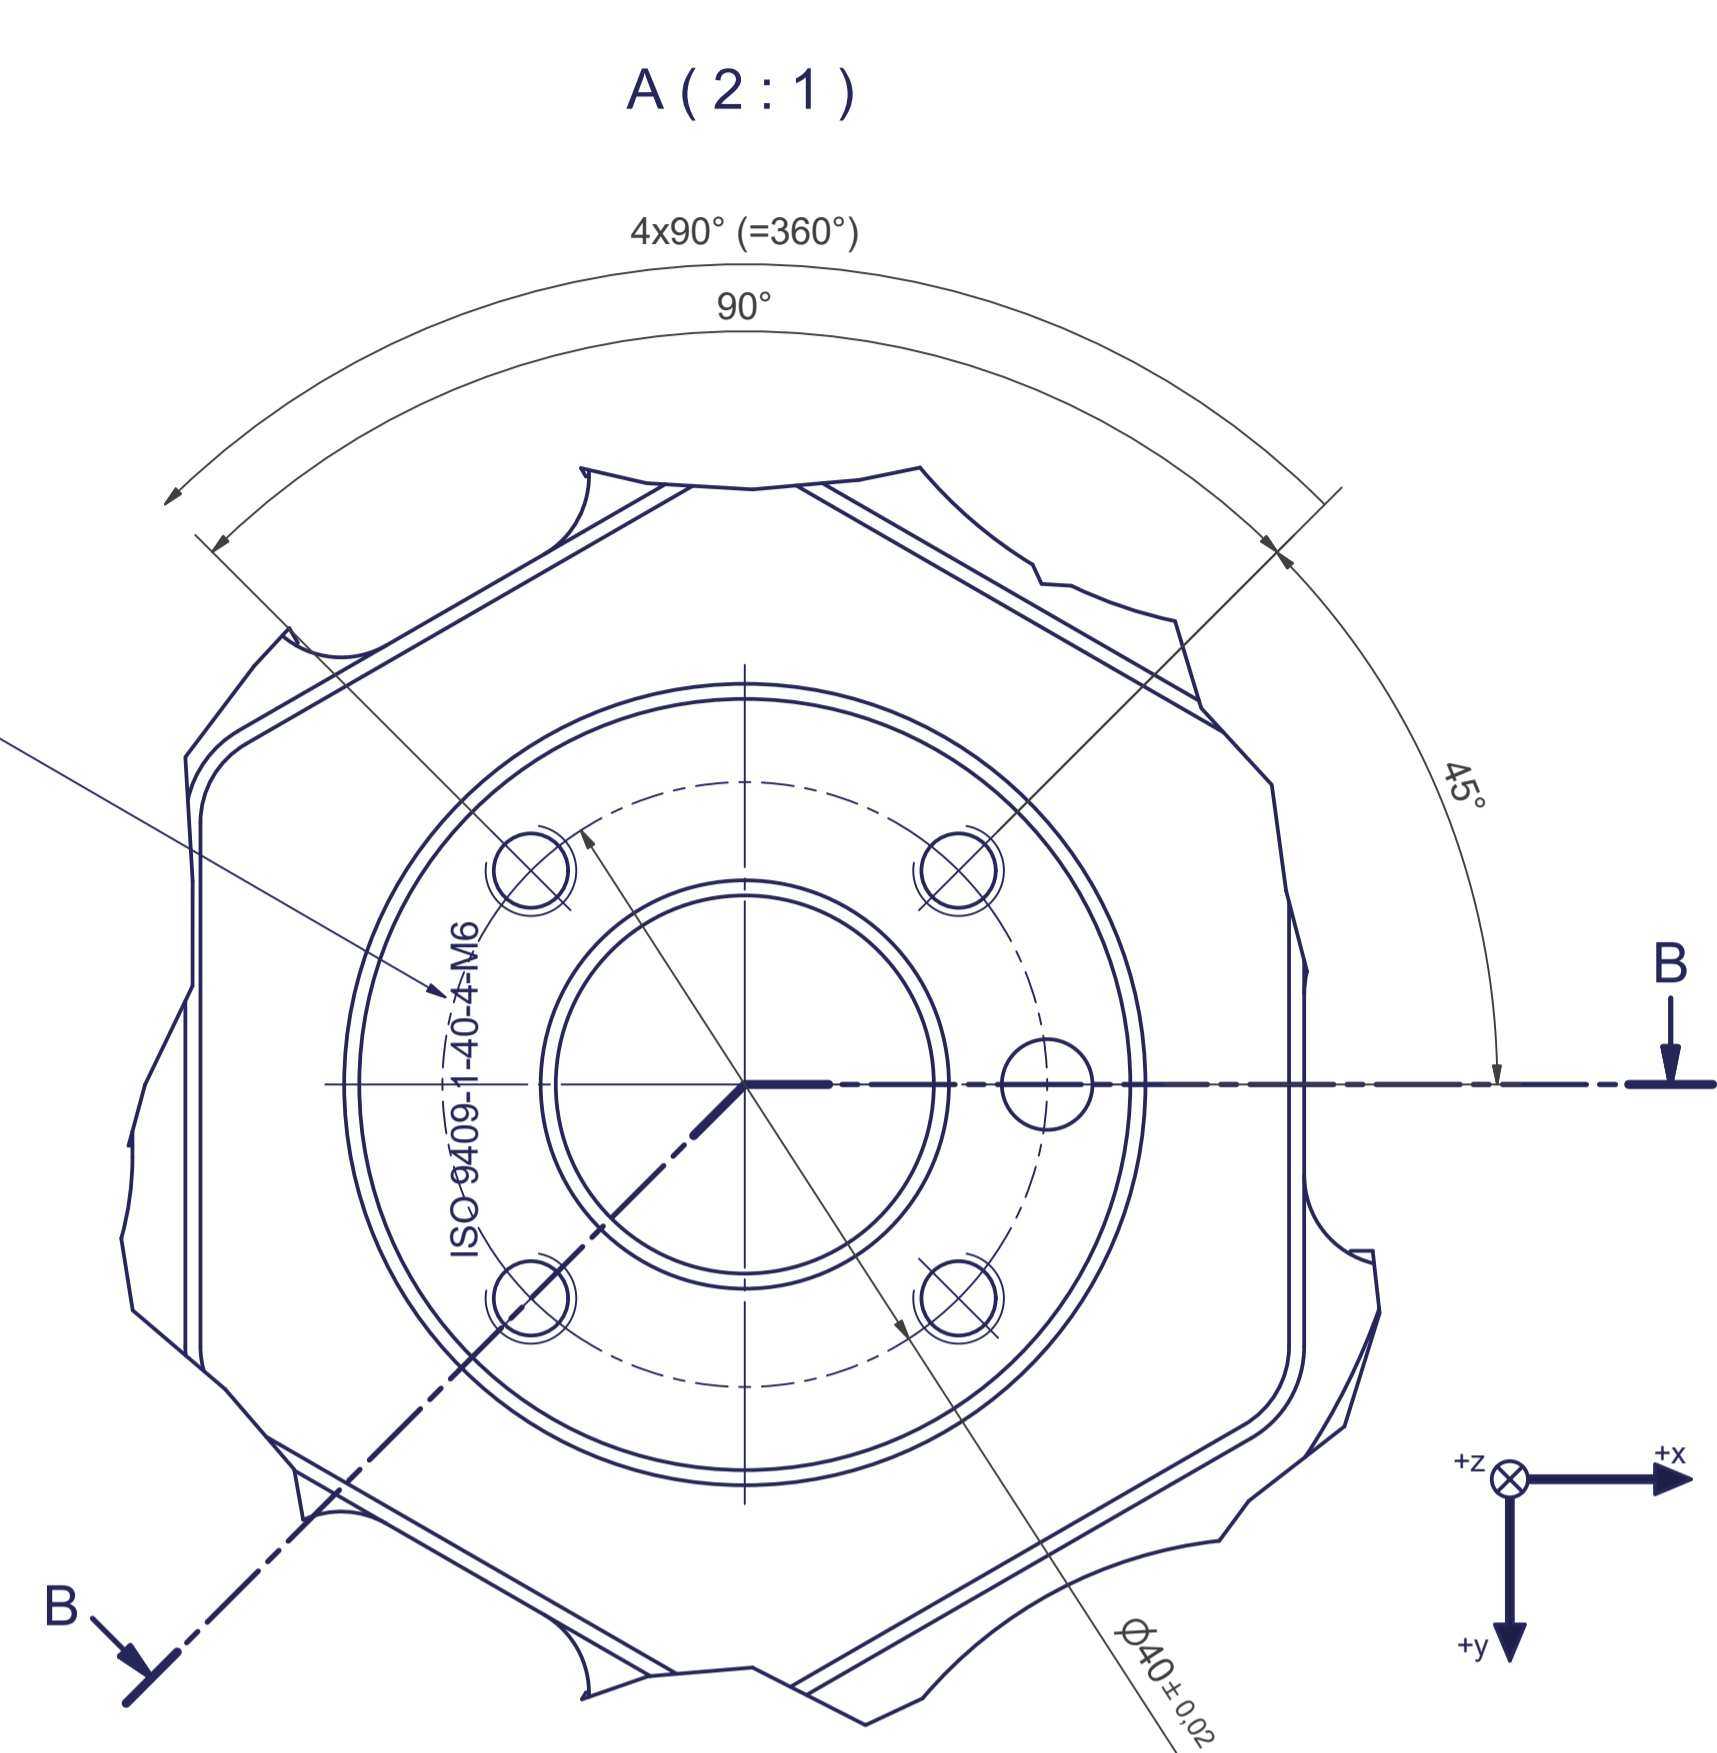

Tool Center Point  
TCP (on the plane of the flange)



TCP - working range

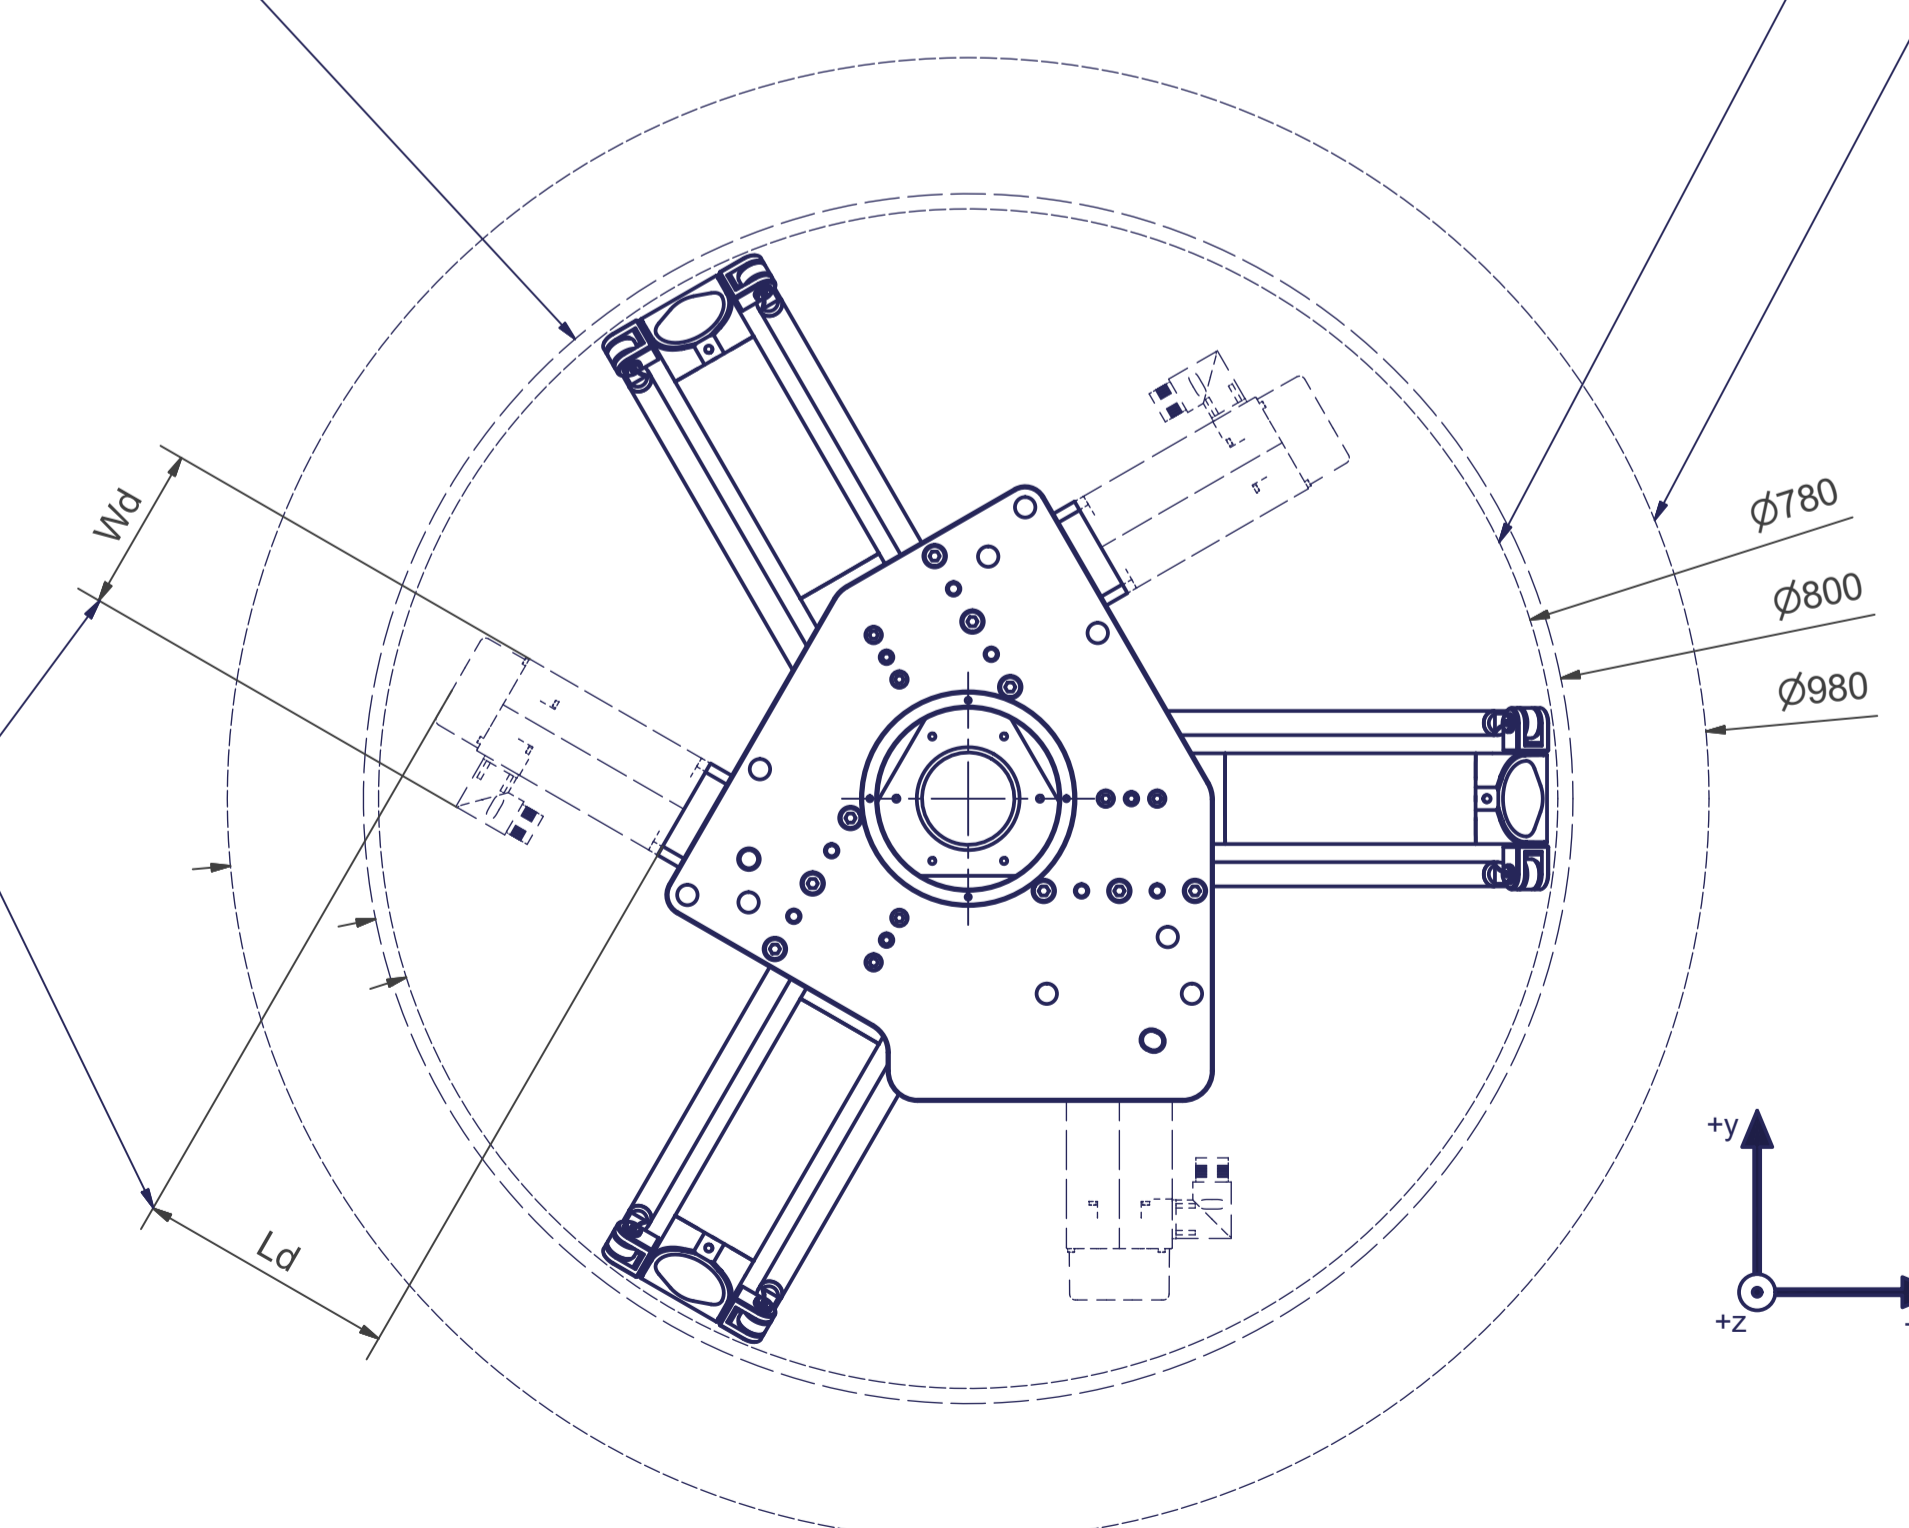

Depending on the drive type

Interference contour from machine body



Maximum interference contour

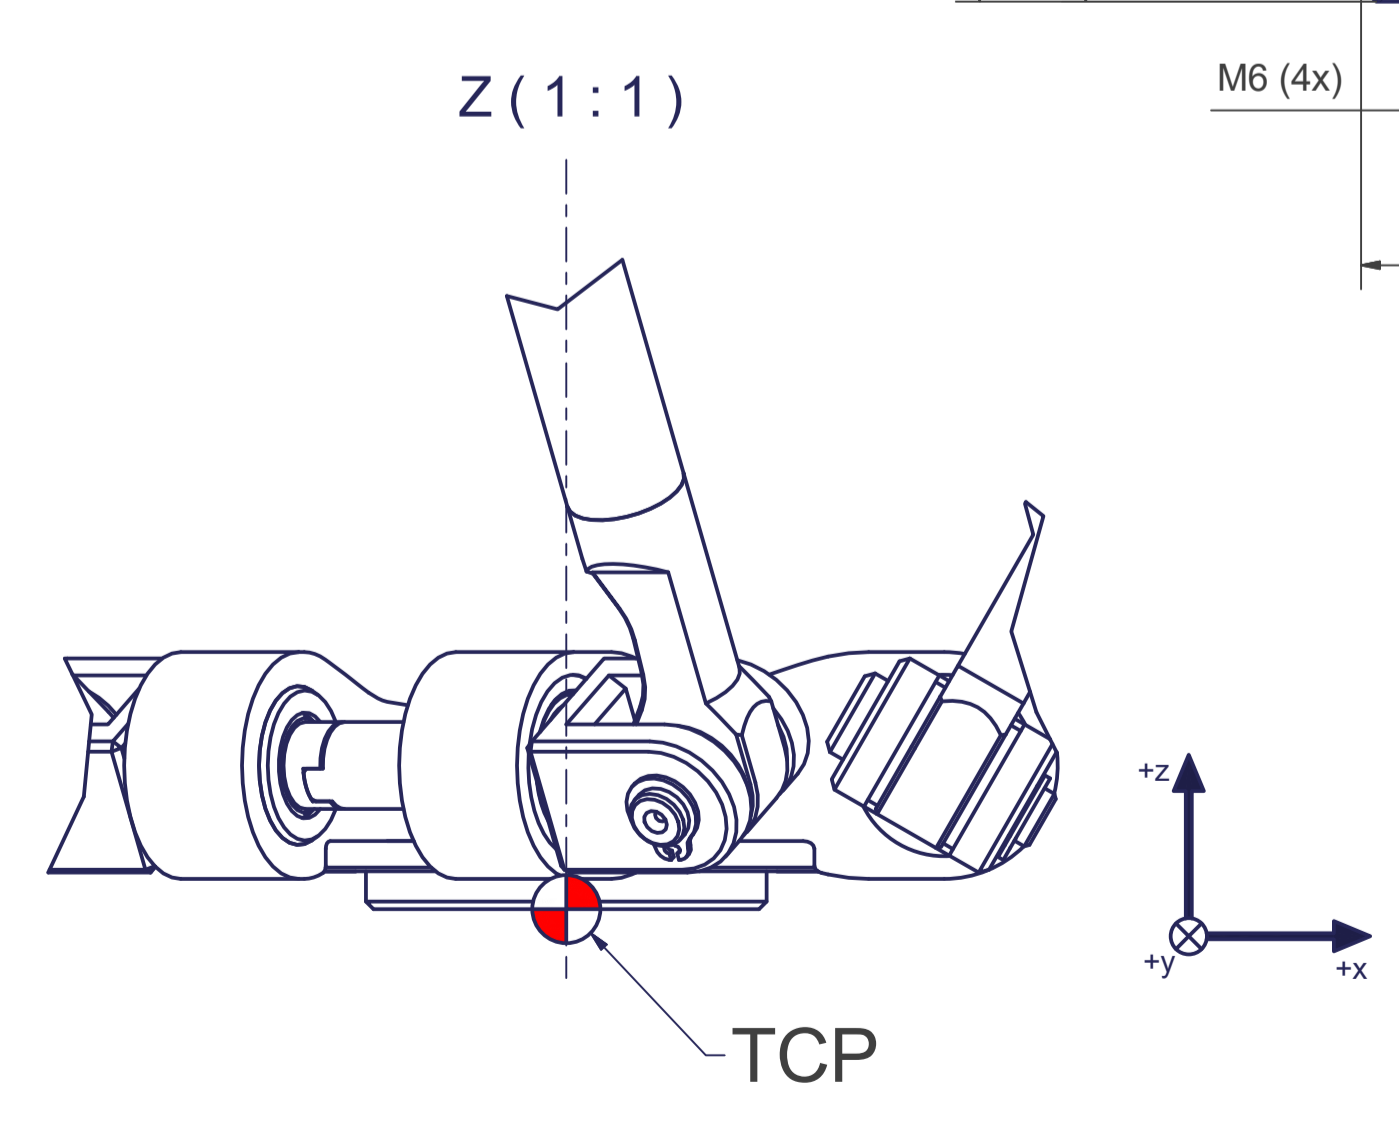
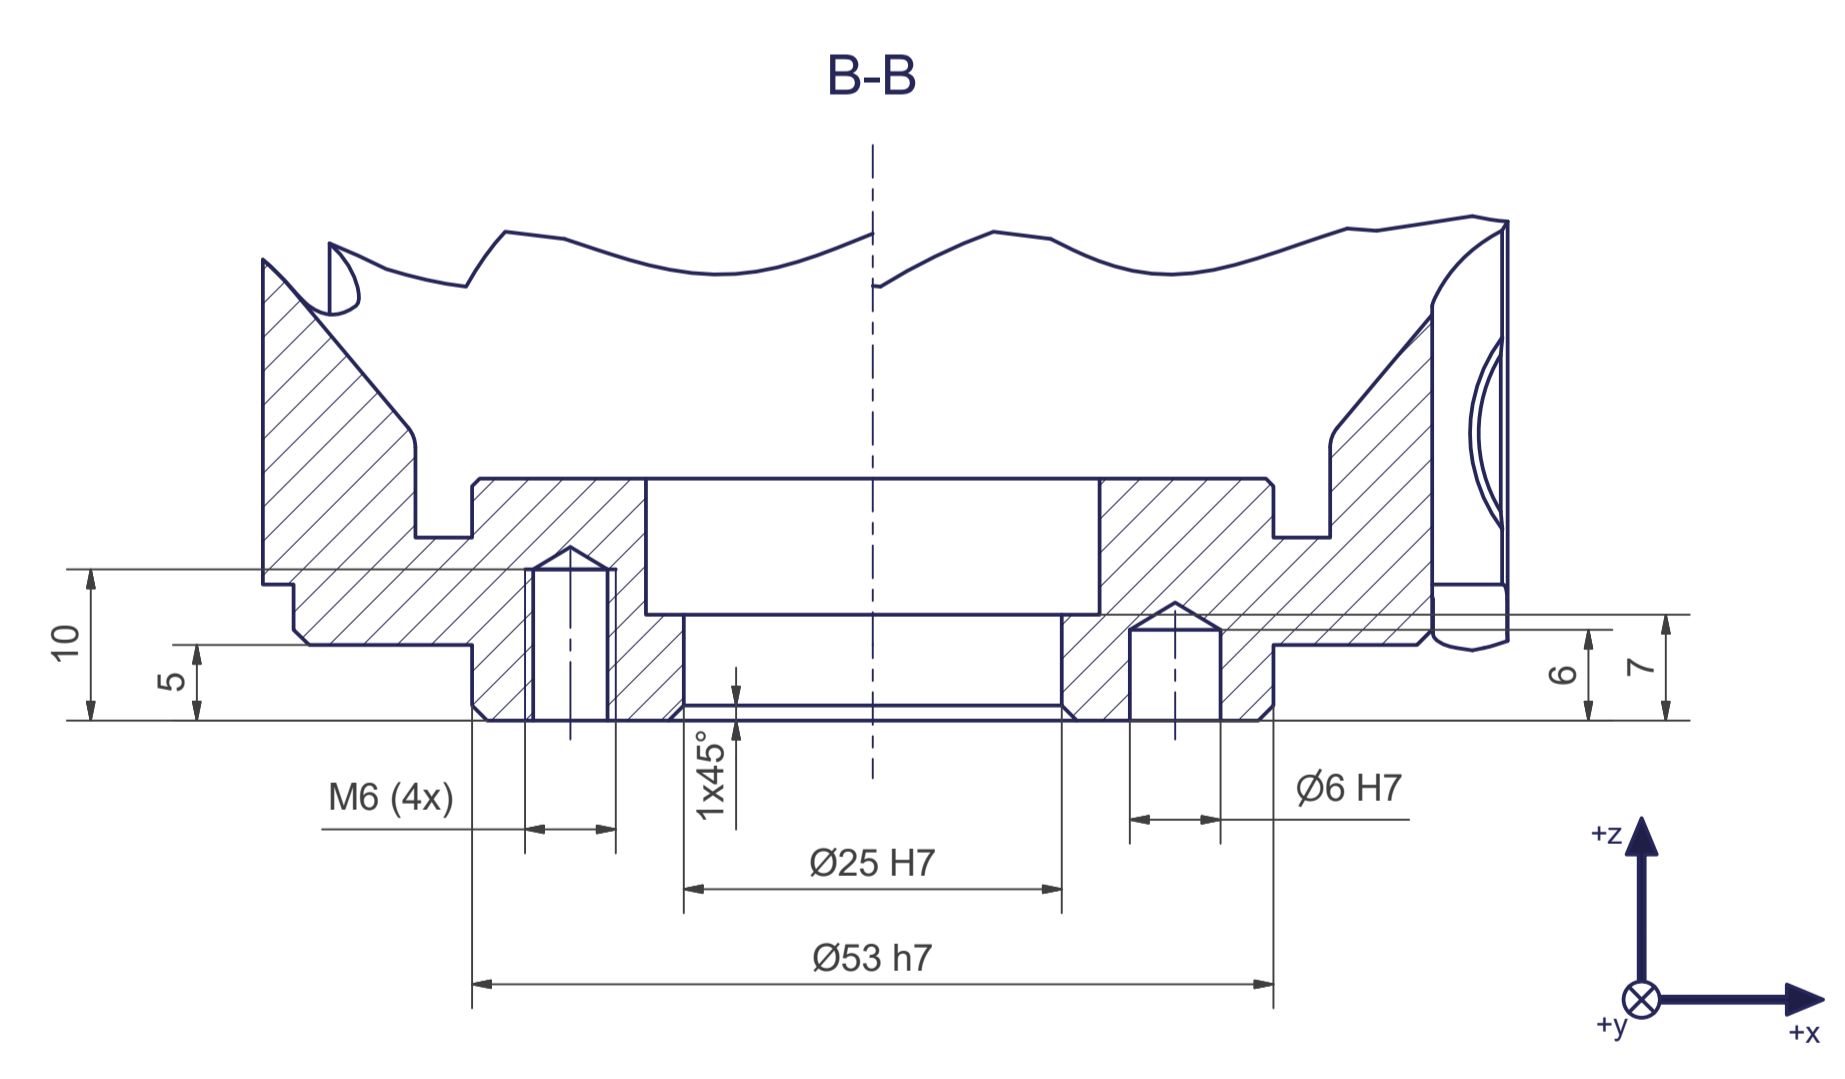


Connecting dimensions, valid for article number A\_00875

m= kg	A	p= bar
proj. storage surface = m²		v̇= l/min
First angle projection	P= kW	
	U= V / Hz / Ph	
	Imax= A	

12 11 10 9 8 7 6 5 4 3 2 1

-  All fastening holes  $\varnothing 13,5$  mm for screws M12 (DIN ISO 4014/4017 -8.8) without washers. Fastening holes are coloured red.
-  Drilling holes for locating pins are filled red. Recommended dimensions of locating pins:  $\varnothing 12$  h6

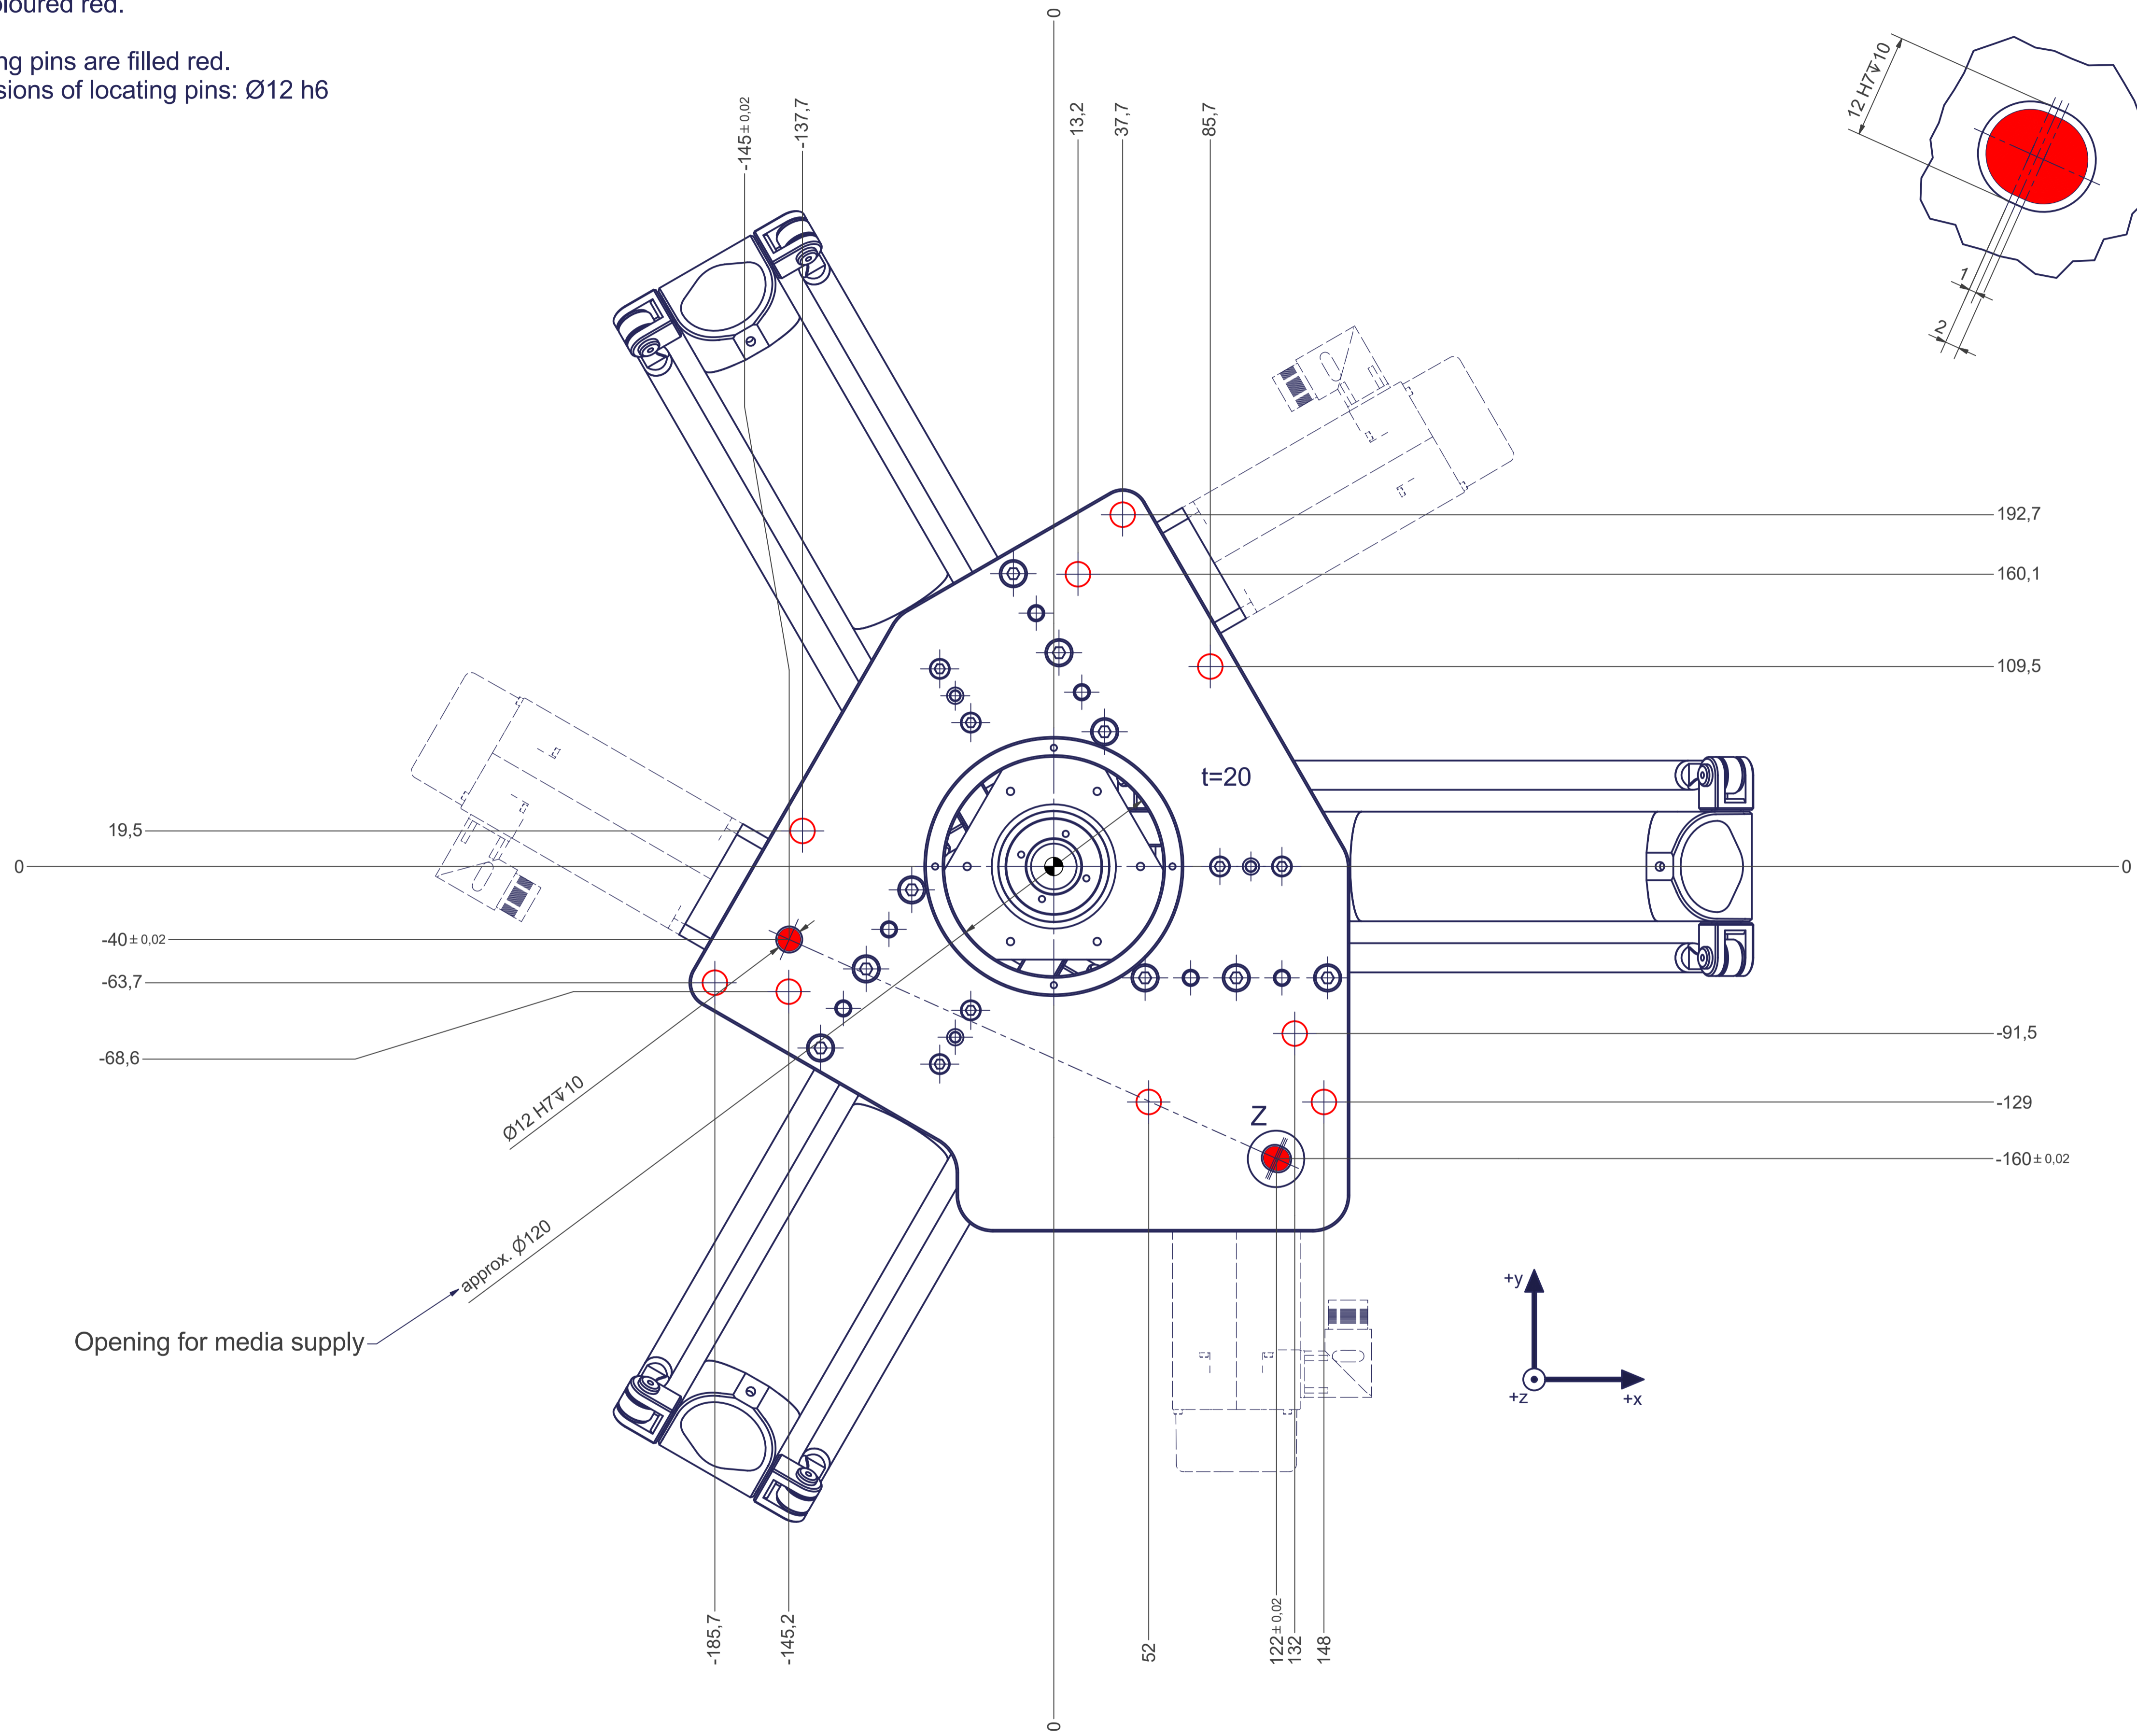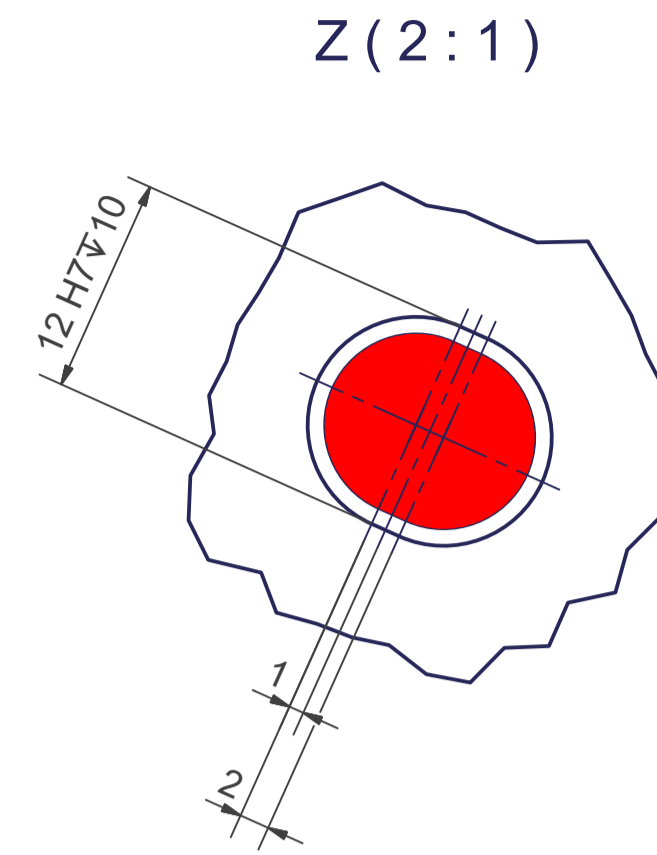

12 11 10 9 8 7 6 5 4 3 2 1