

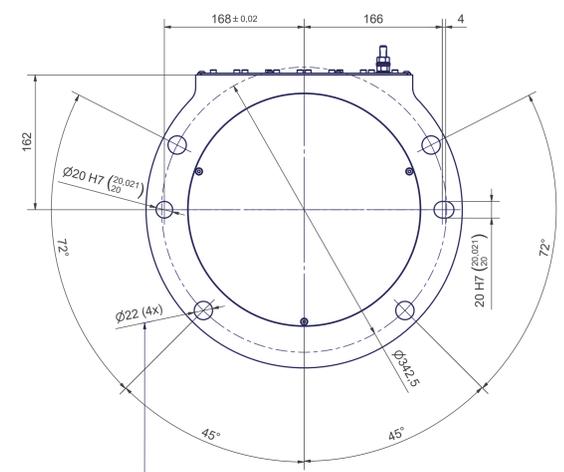


C (1 : 3)
Base frame

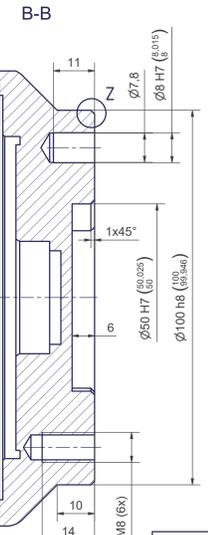

A (3 : 2)
Tool mounting flange

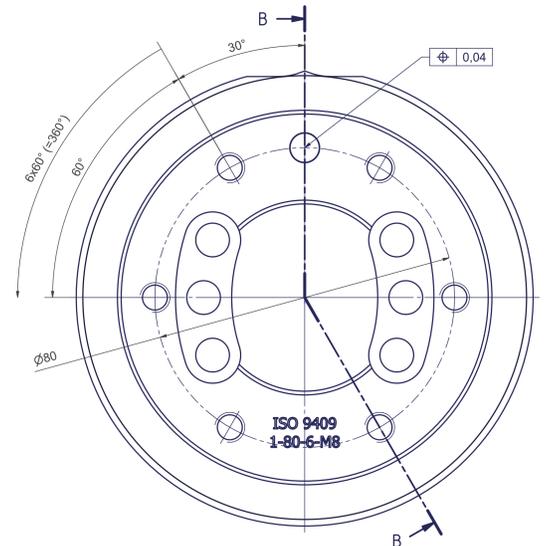

Motion	
Axes	Range fully usable
A1	$\pm 185^\circ$
A2	$-88^\circ / +169^\circ$ (*)
A3	$-160^\circ / +78^\circ$ (*)
A4	Mechanical endless (**)
A5	$\pm 120^\circ$
A6	Mechanical endless (**)

(*) More information can be found in the document "calibration dimensions".
 (**) Control system dependent.

artic6-1803-20kg	
Axes	6
Payload (on TCP)	20 kg
Supplementary load on arm	10 kg
Reach	1803 mm
Mounting position	Angle, Ceiling, Floor, Wall

Connecting dimensions, valid for article number: AT_00043

kg	⚡	⊙
m=	kg	A
proj. storage surface =	m ²	p= bar ϕ= lmm
First angle projection	1x45°	
U=	kW	
lmax=	V / Hz / Ph	