


Depending on the drive type

Depending on the drive type

Maximum deflection of the upper arm

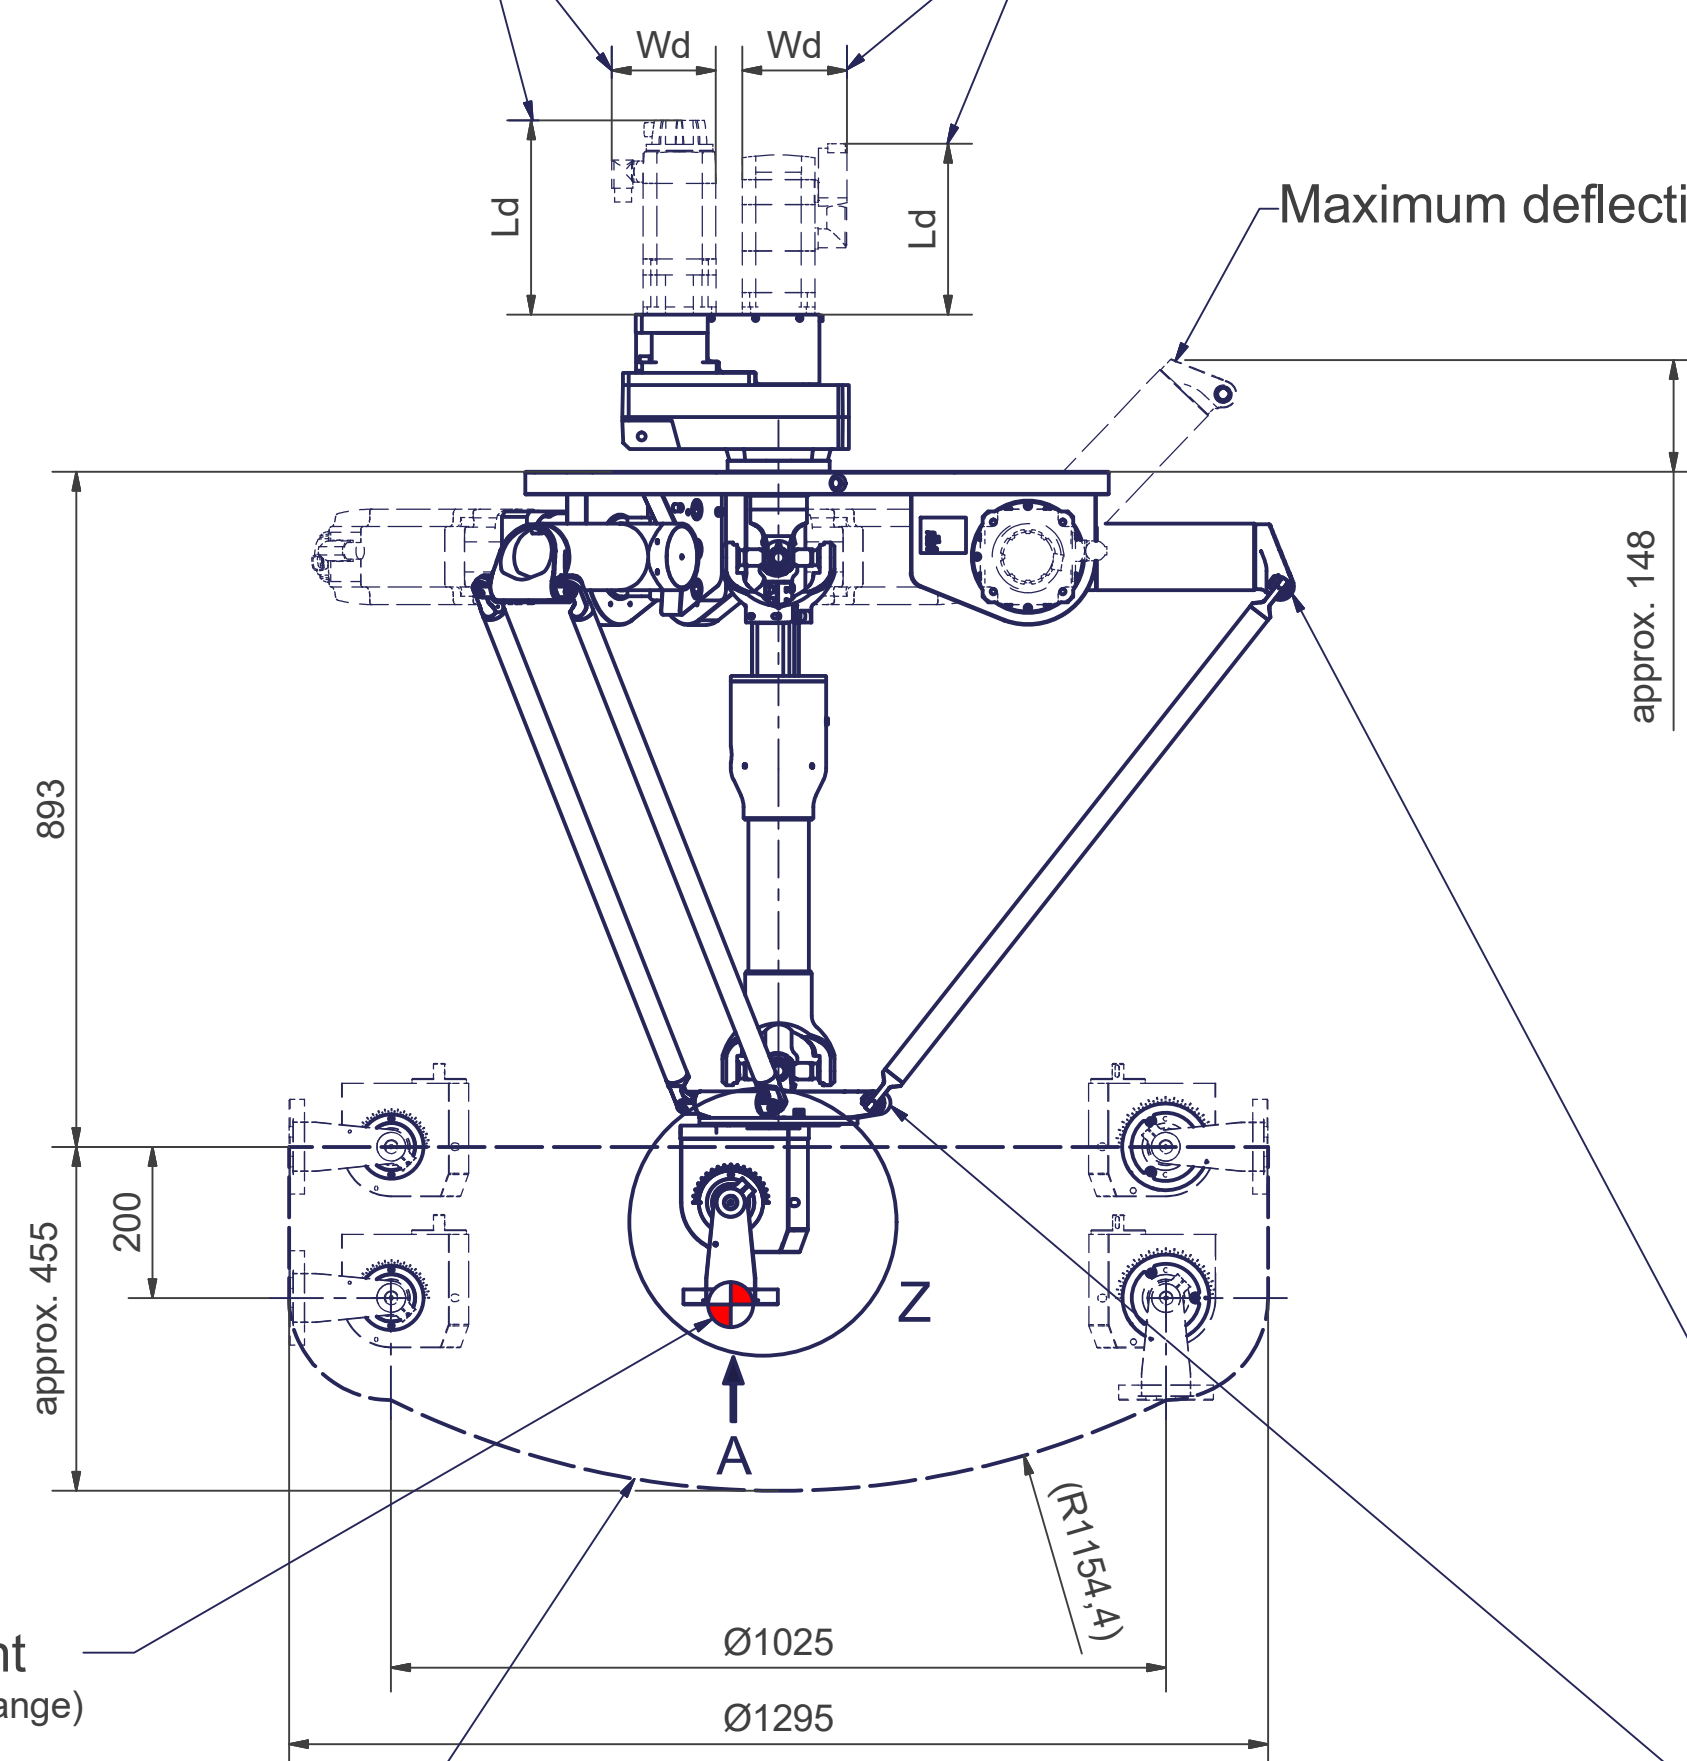


Tool Center Point
TCP (on the plane of the flange)

Interference contour
from machine body

Maximum interference
contour


TCP - working range

Depending on
the drive type

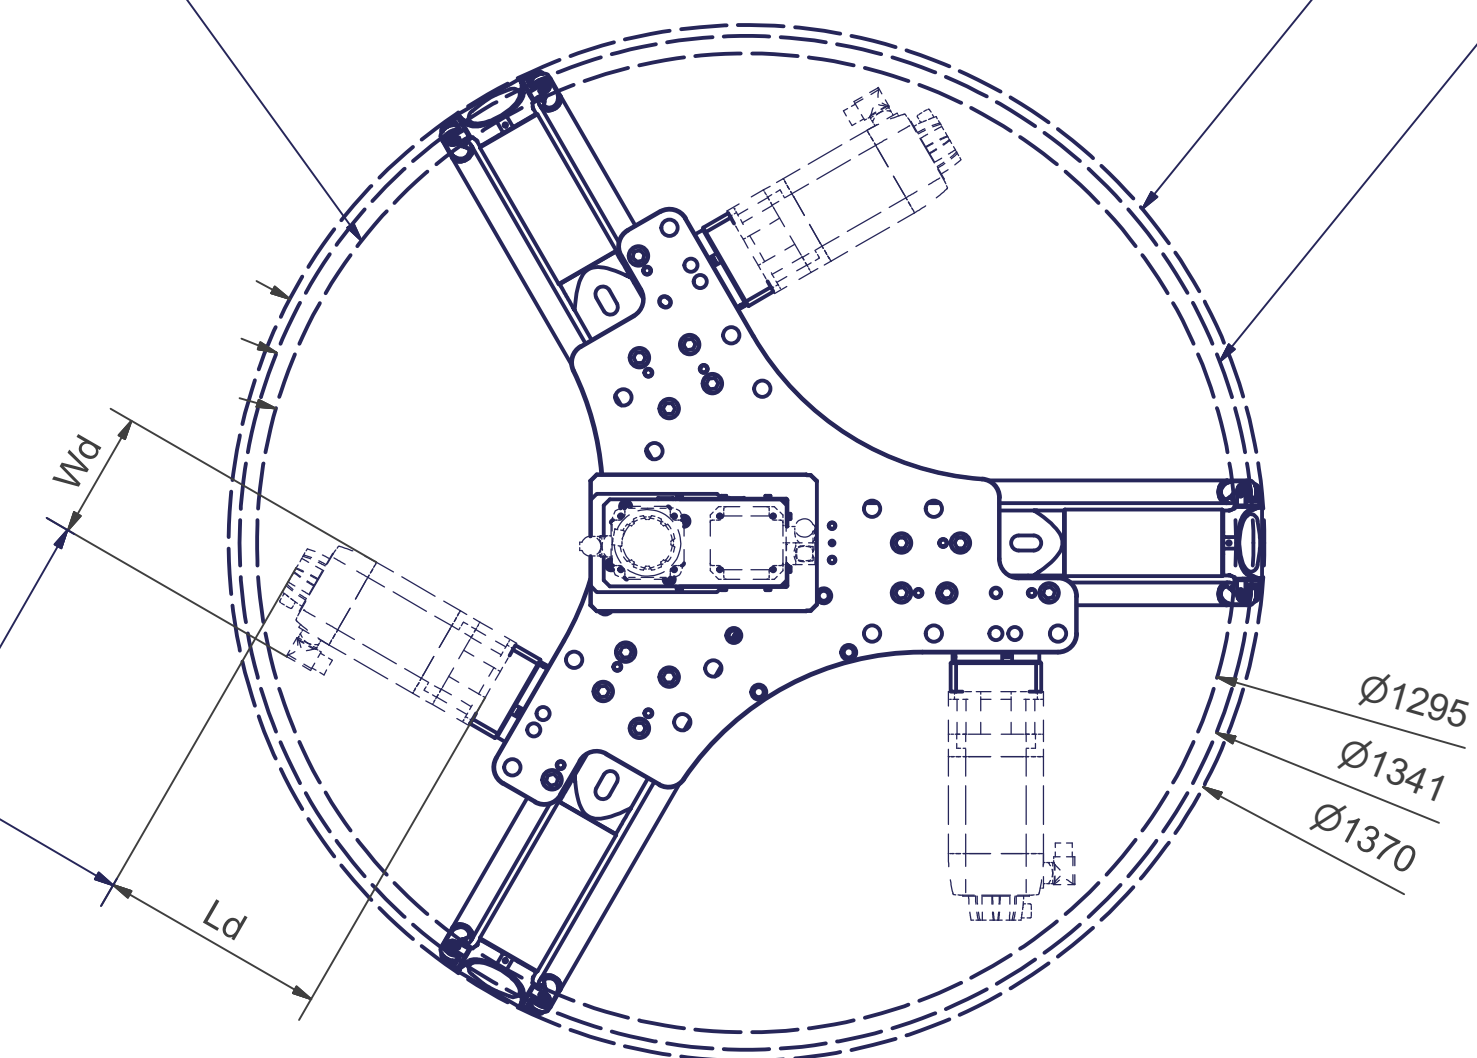


A (1 : 1)


Flange diagram according
to ISO 9409-1-100-6-M8

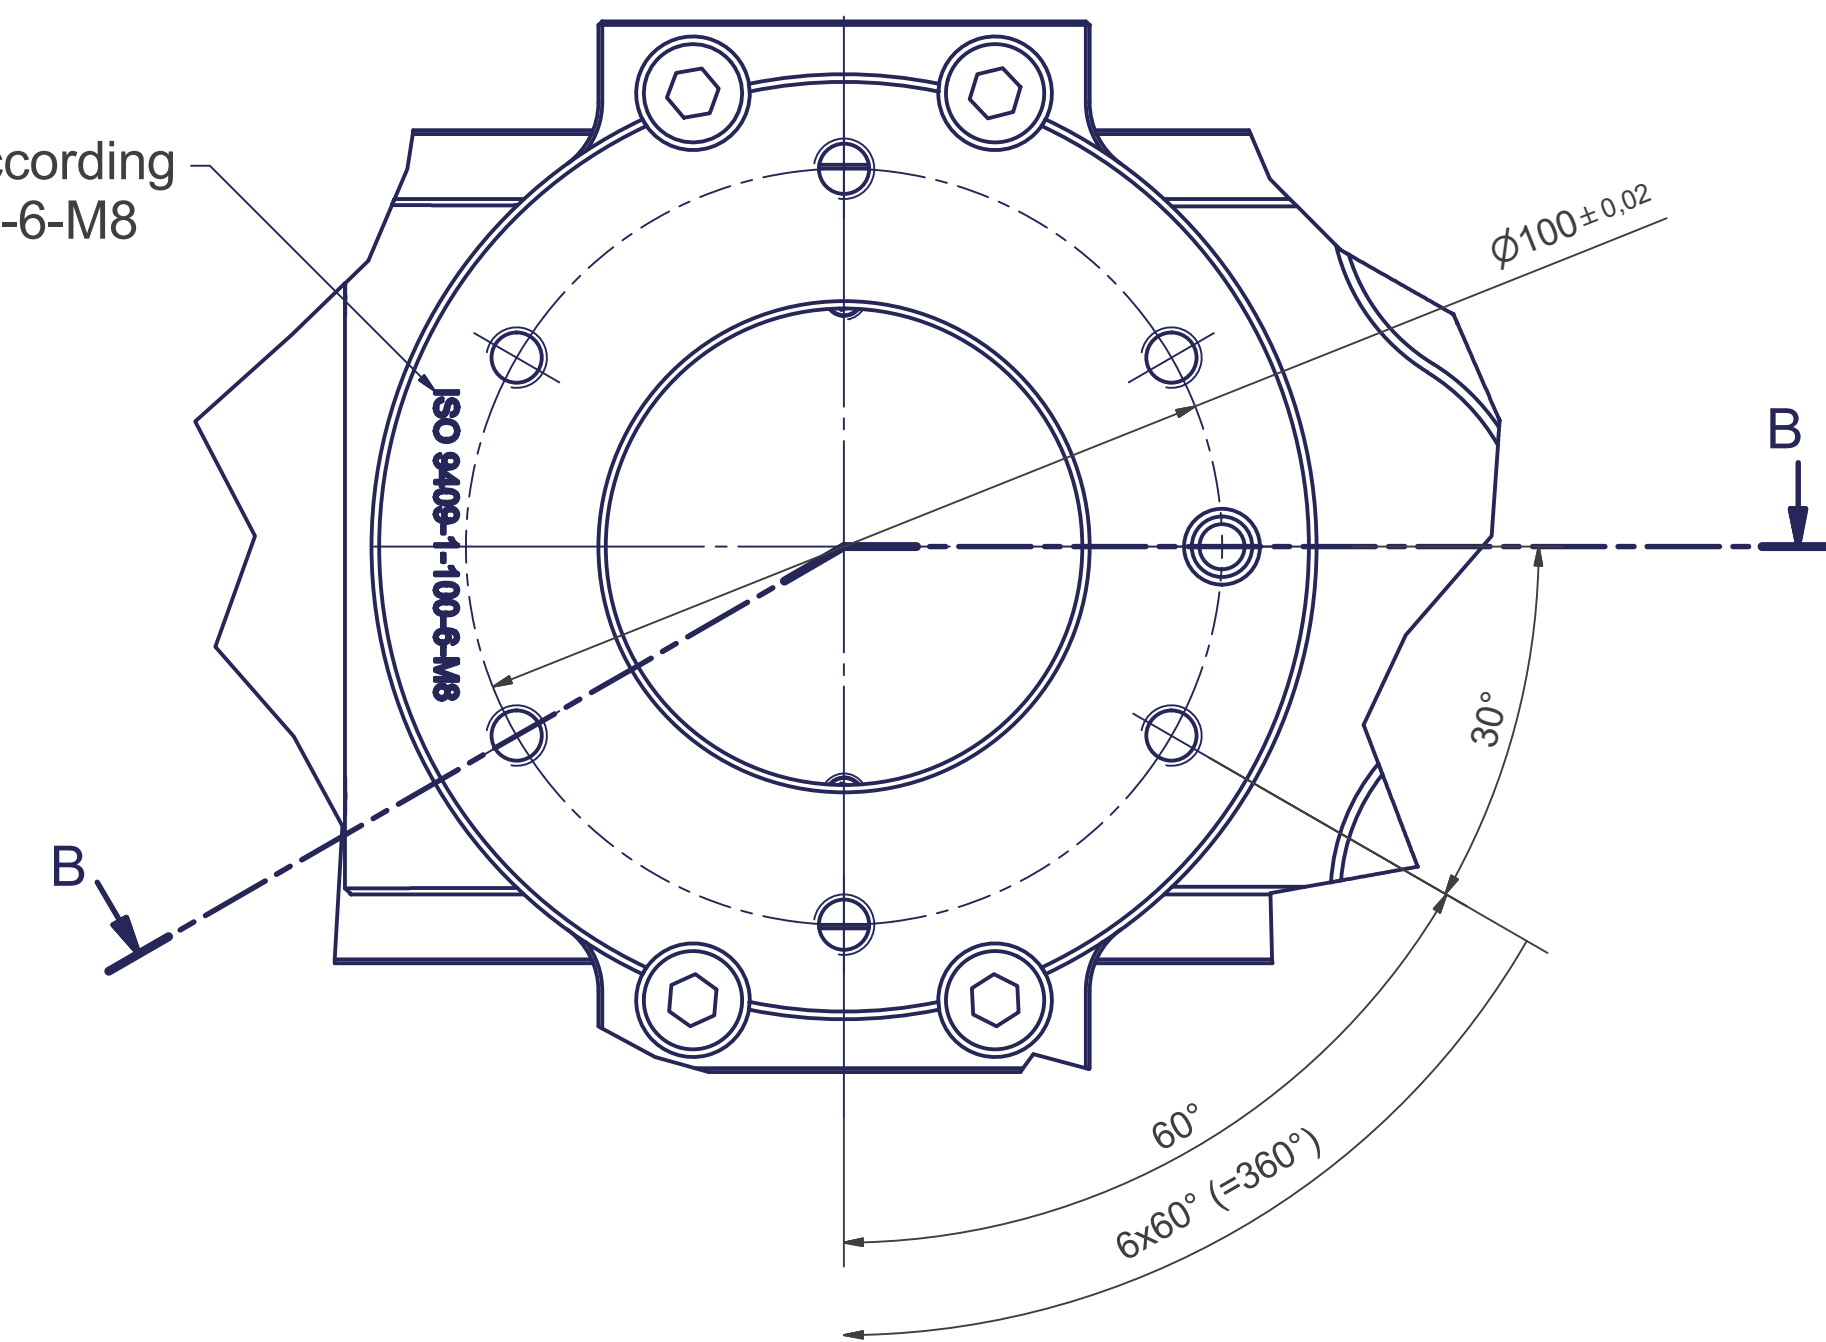

B-B

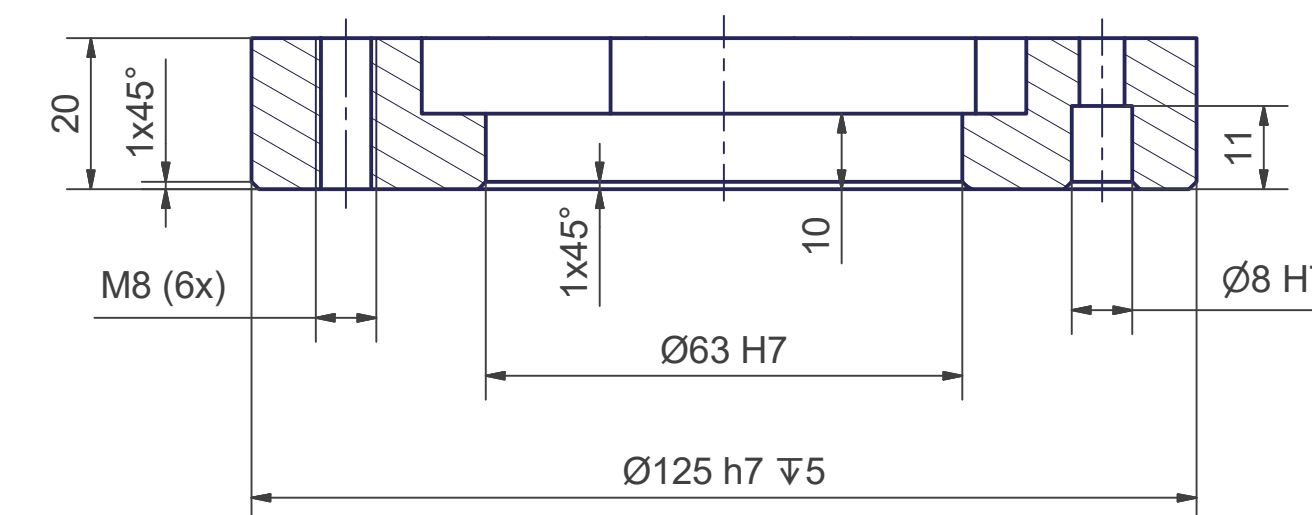

Z (1 : 2)

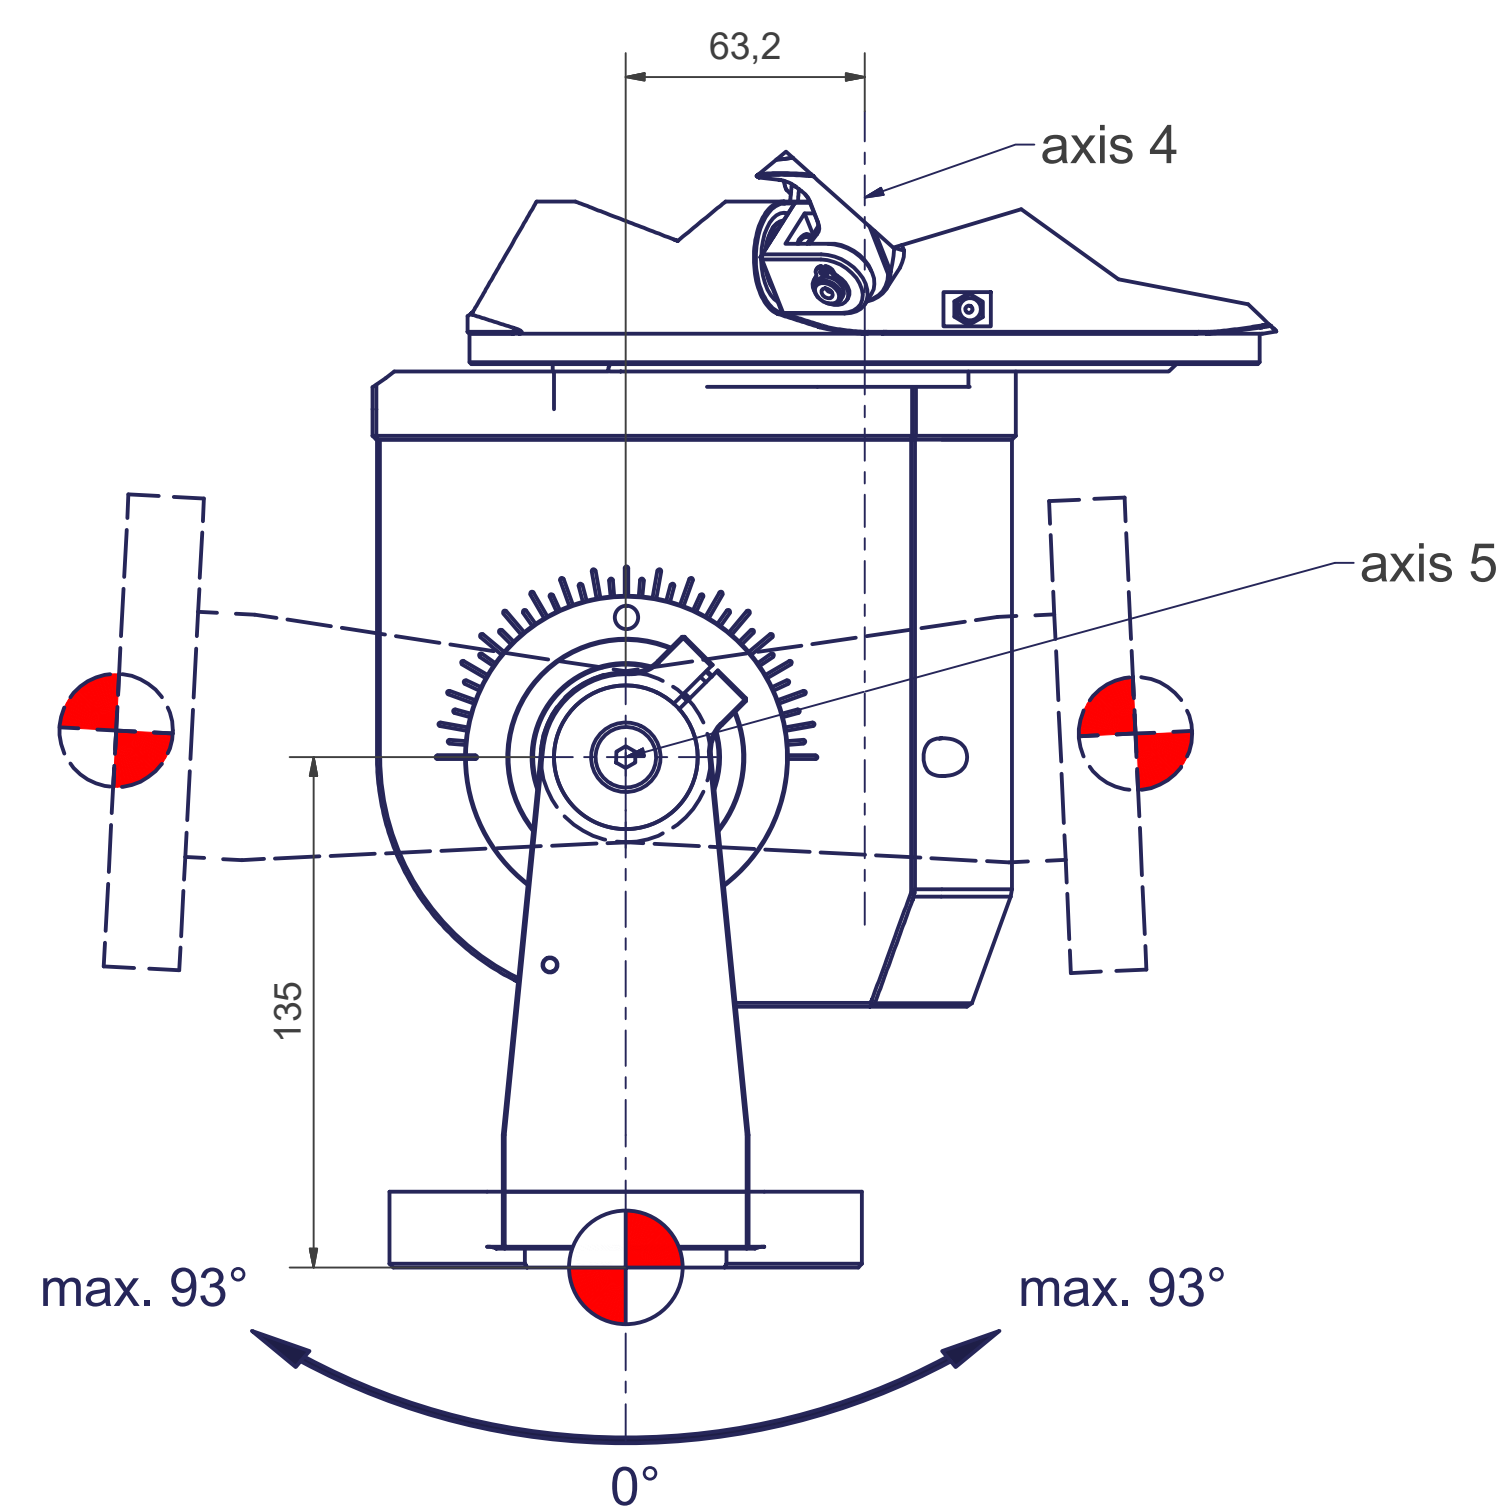

Connecting dimensions,
valid for article number A_00825

m= kg	A	p= bar V= l/min
projected storage surface = m²	P= kW U= V / Hz / Ph Imax= A	

A_00825

