



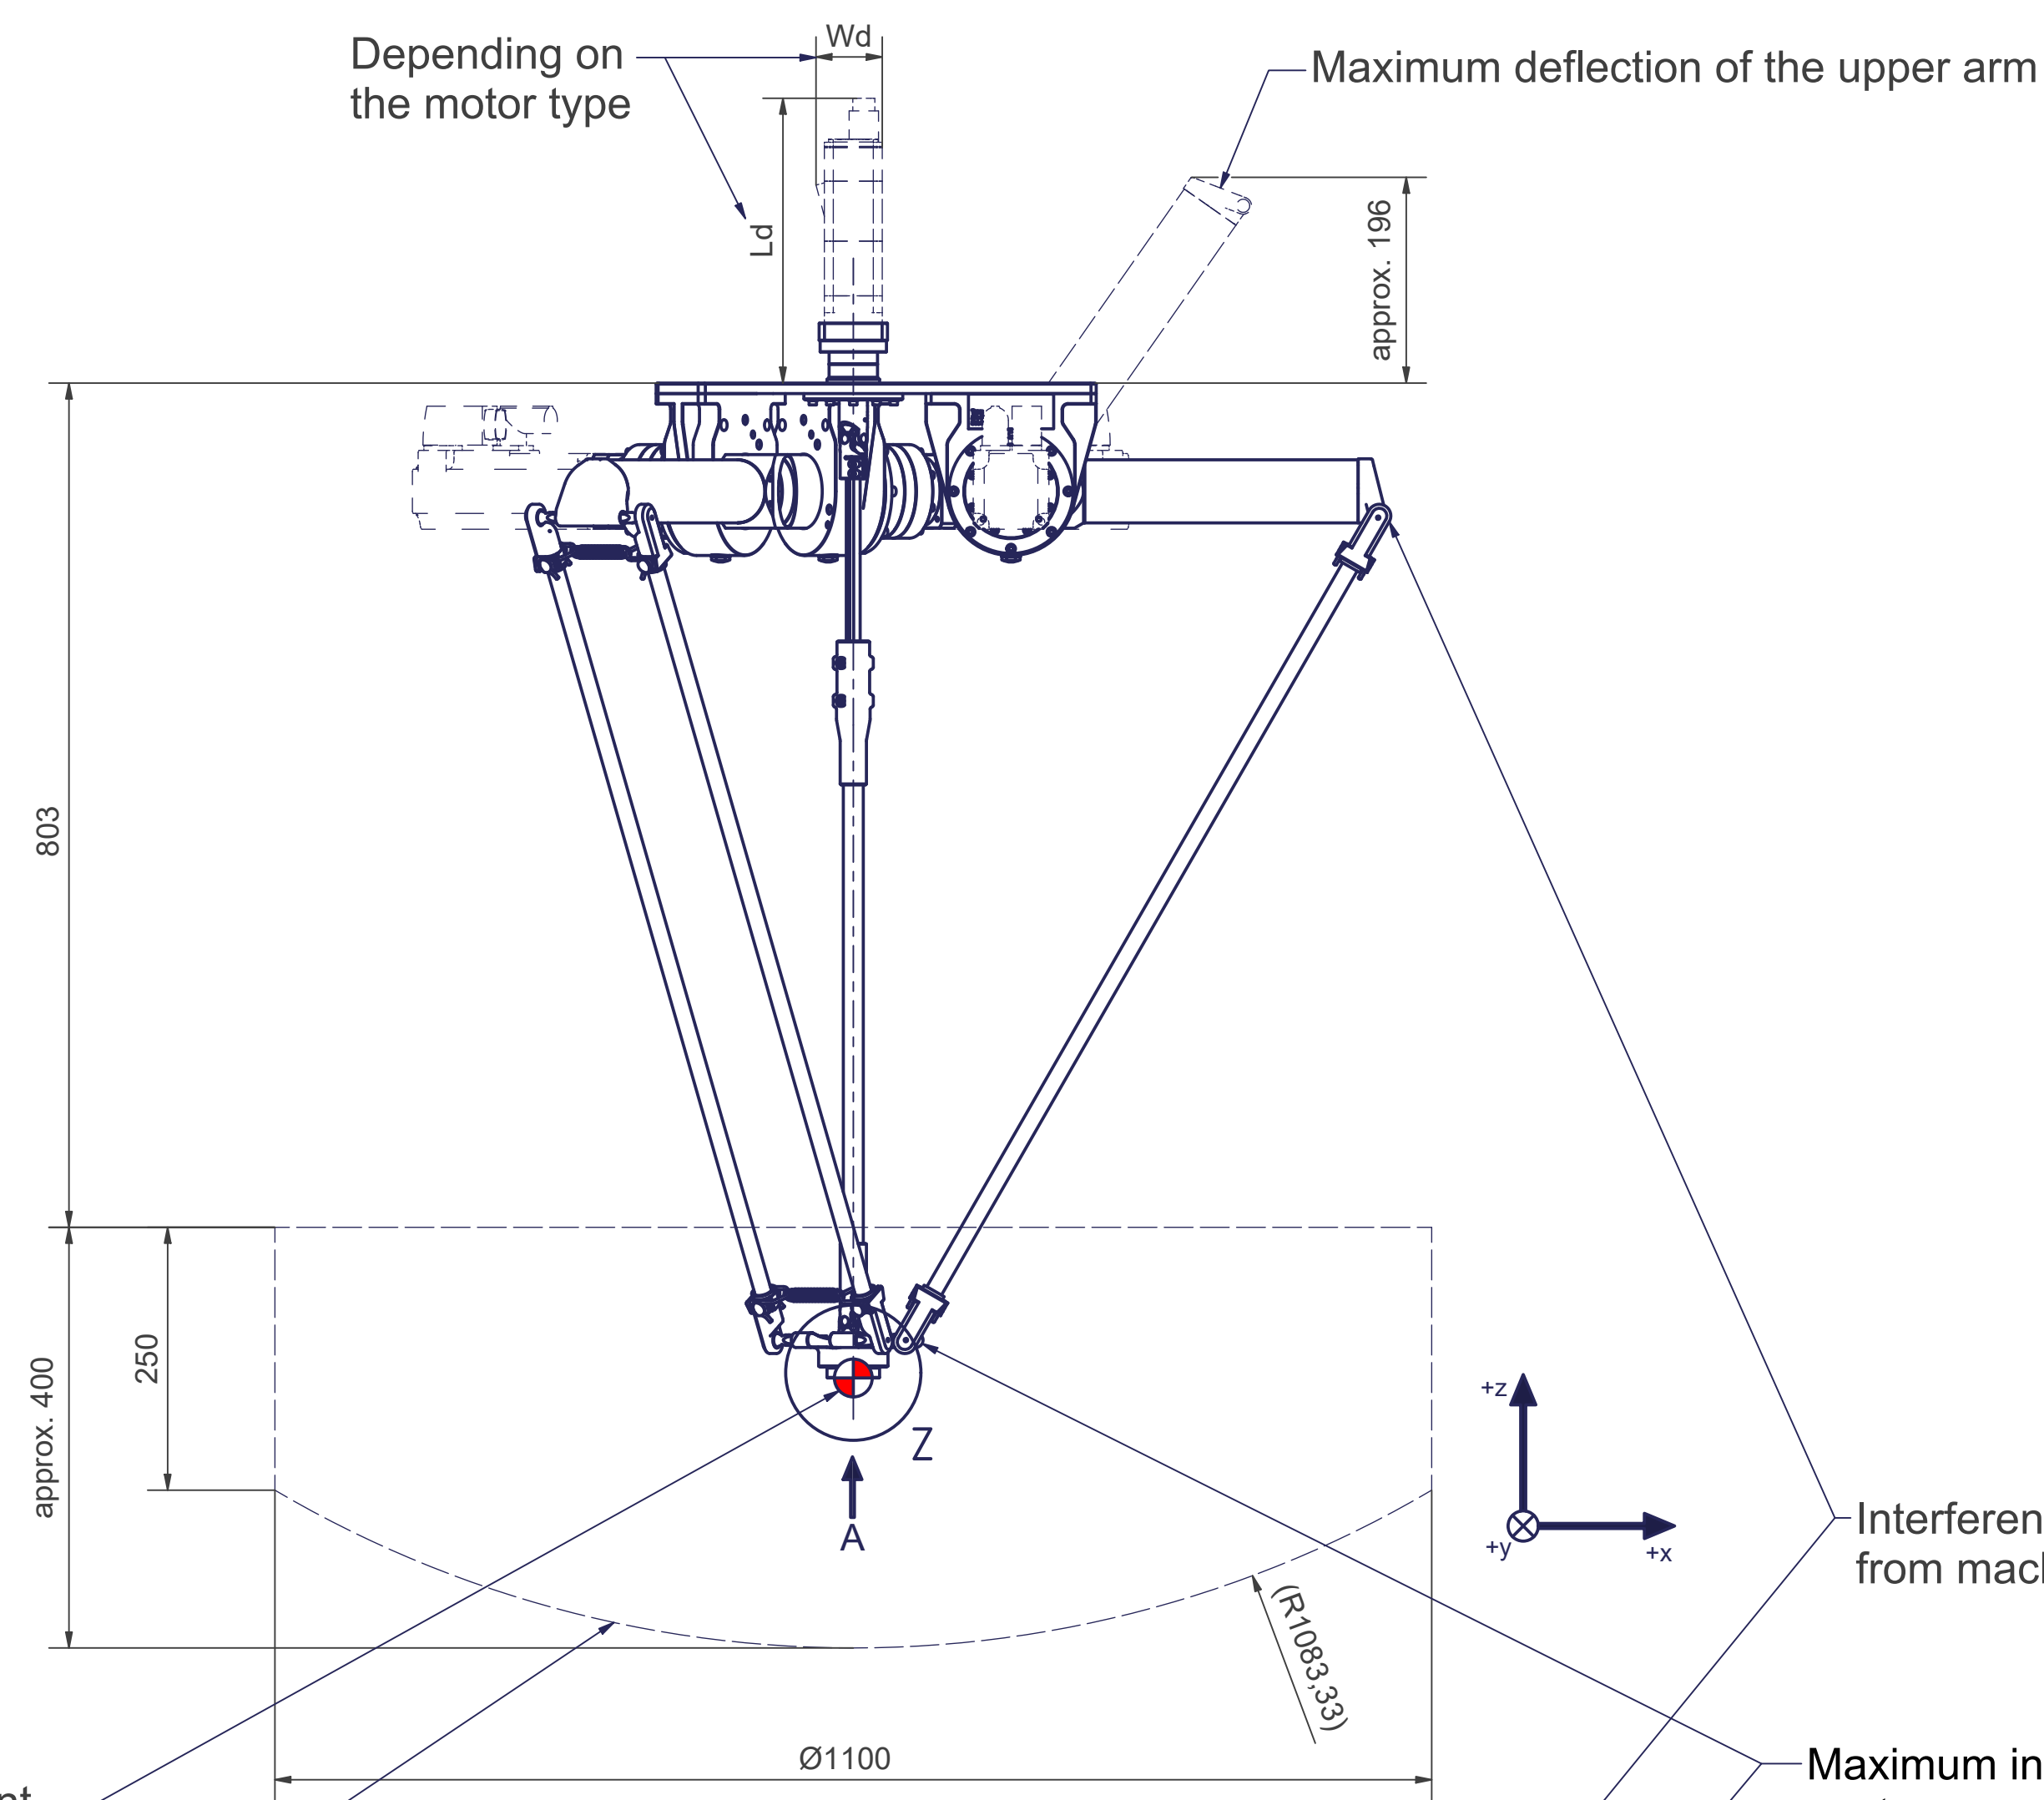

Tool Center Point
TCP (on the plane of the flange)




TCP - working range

Depending on the motor type

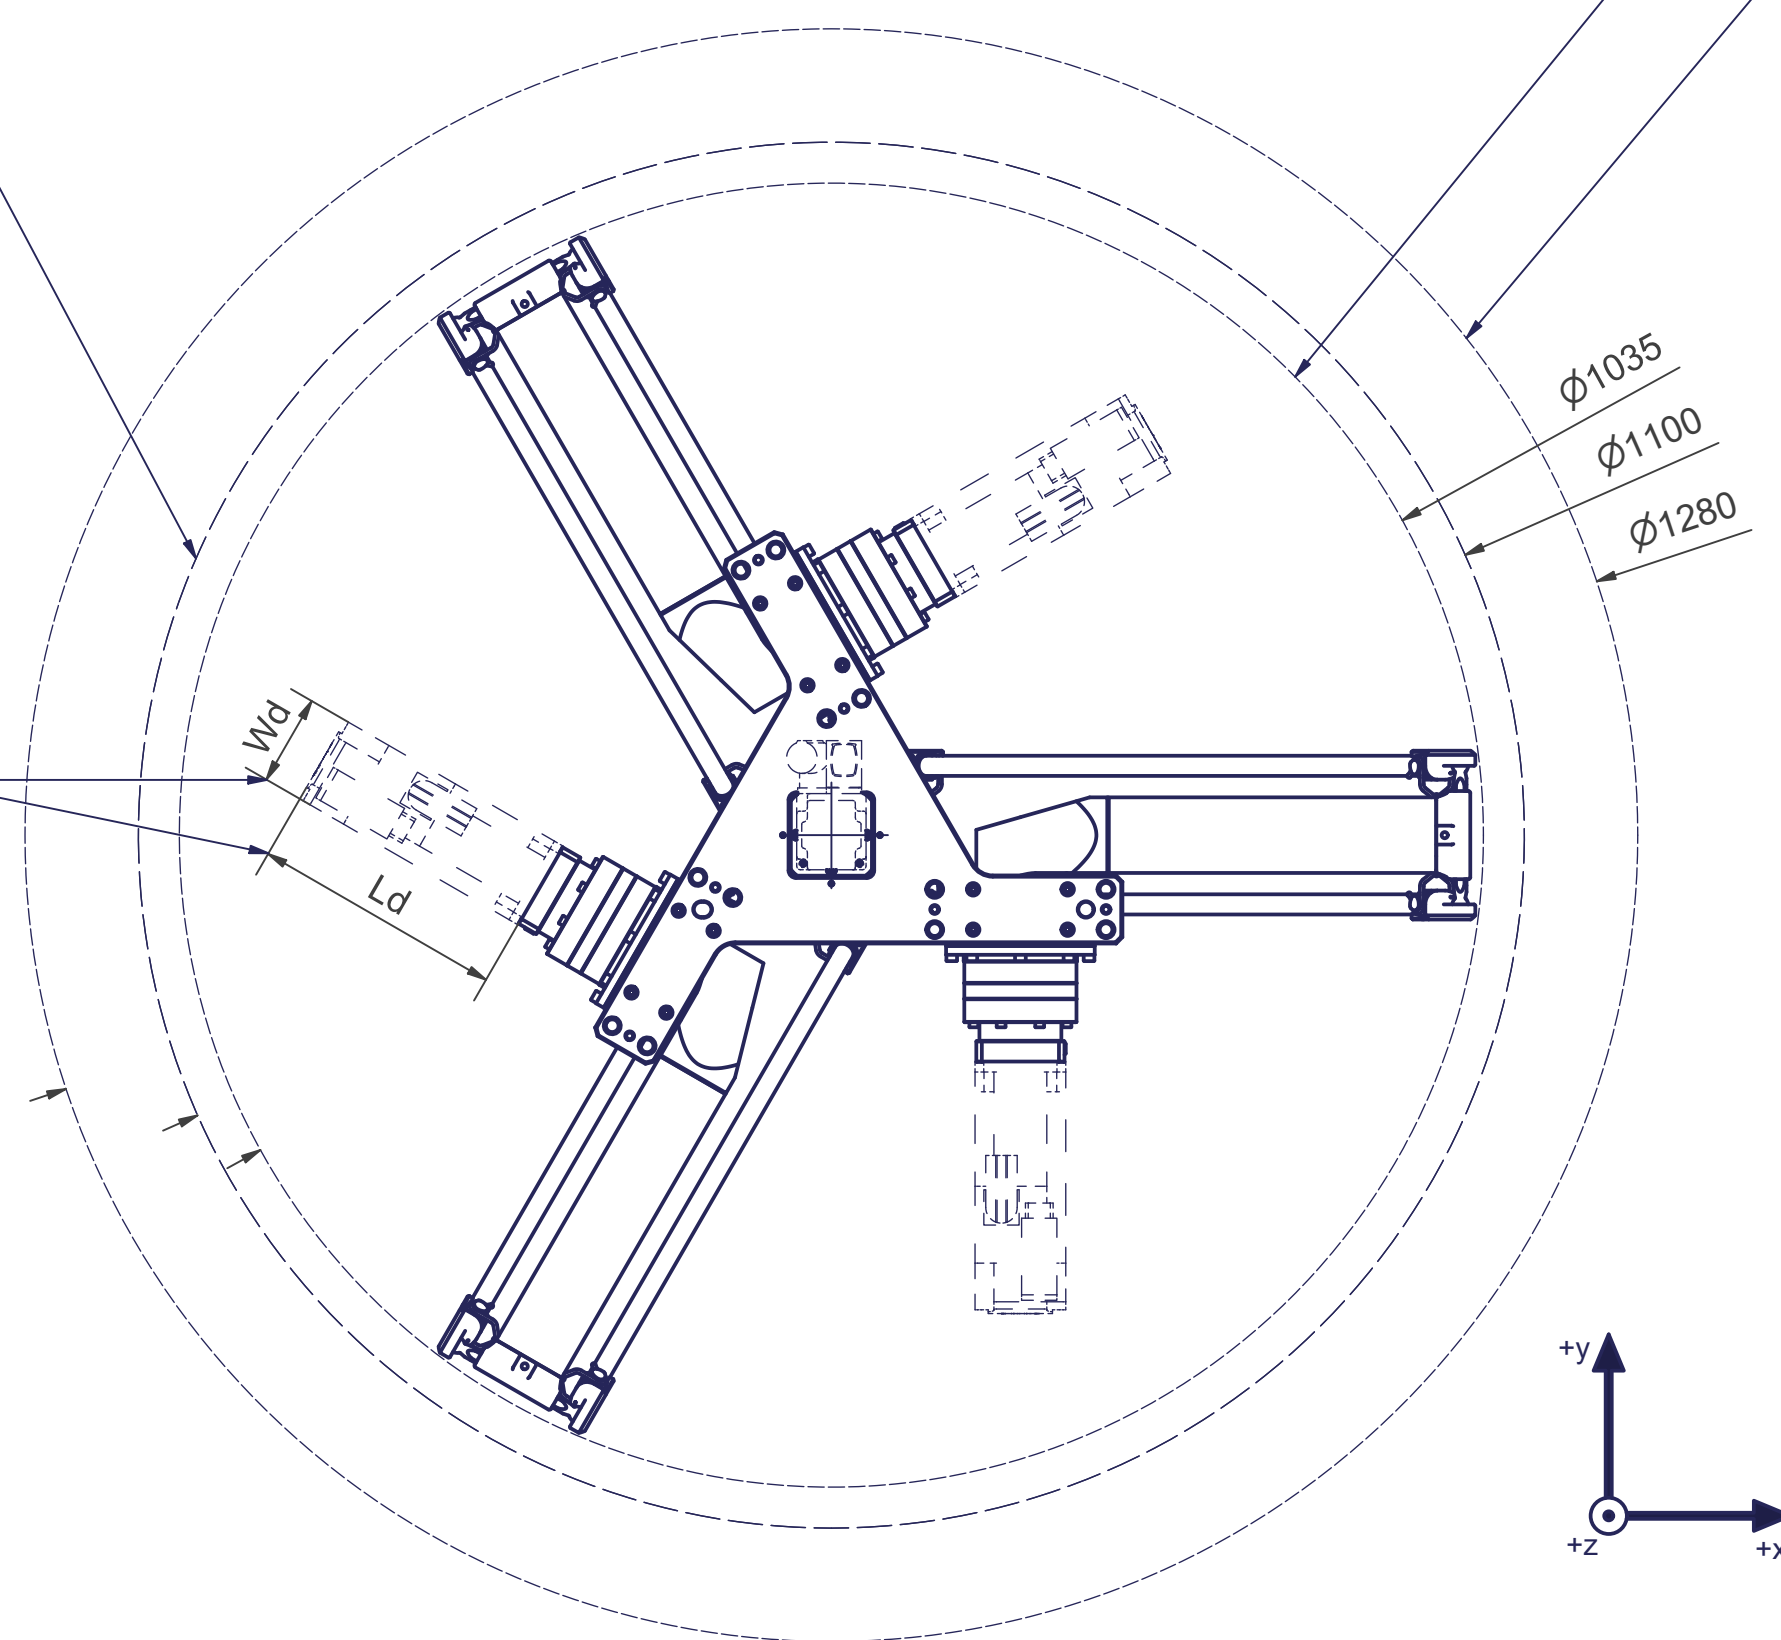

Interference contour
from machine body

Maximum interference
contour

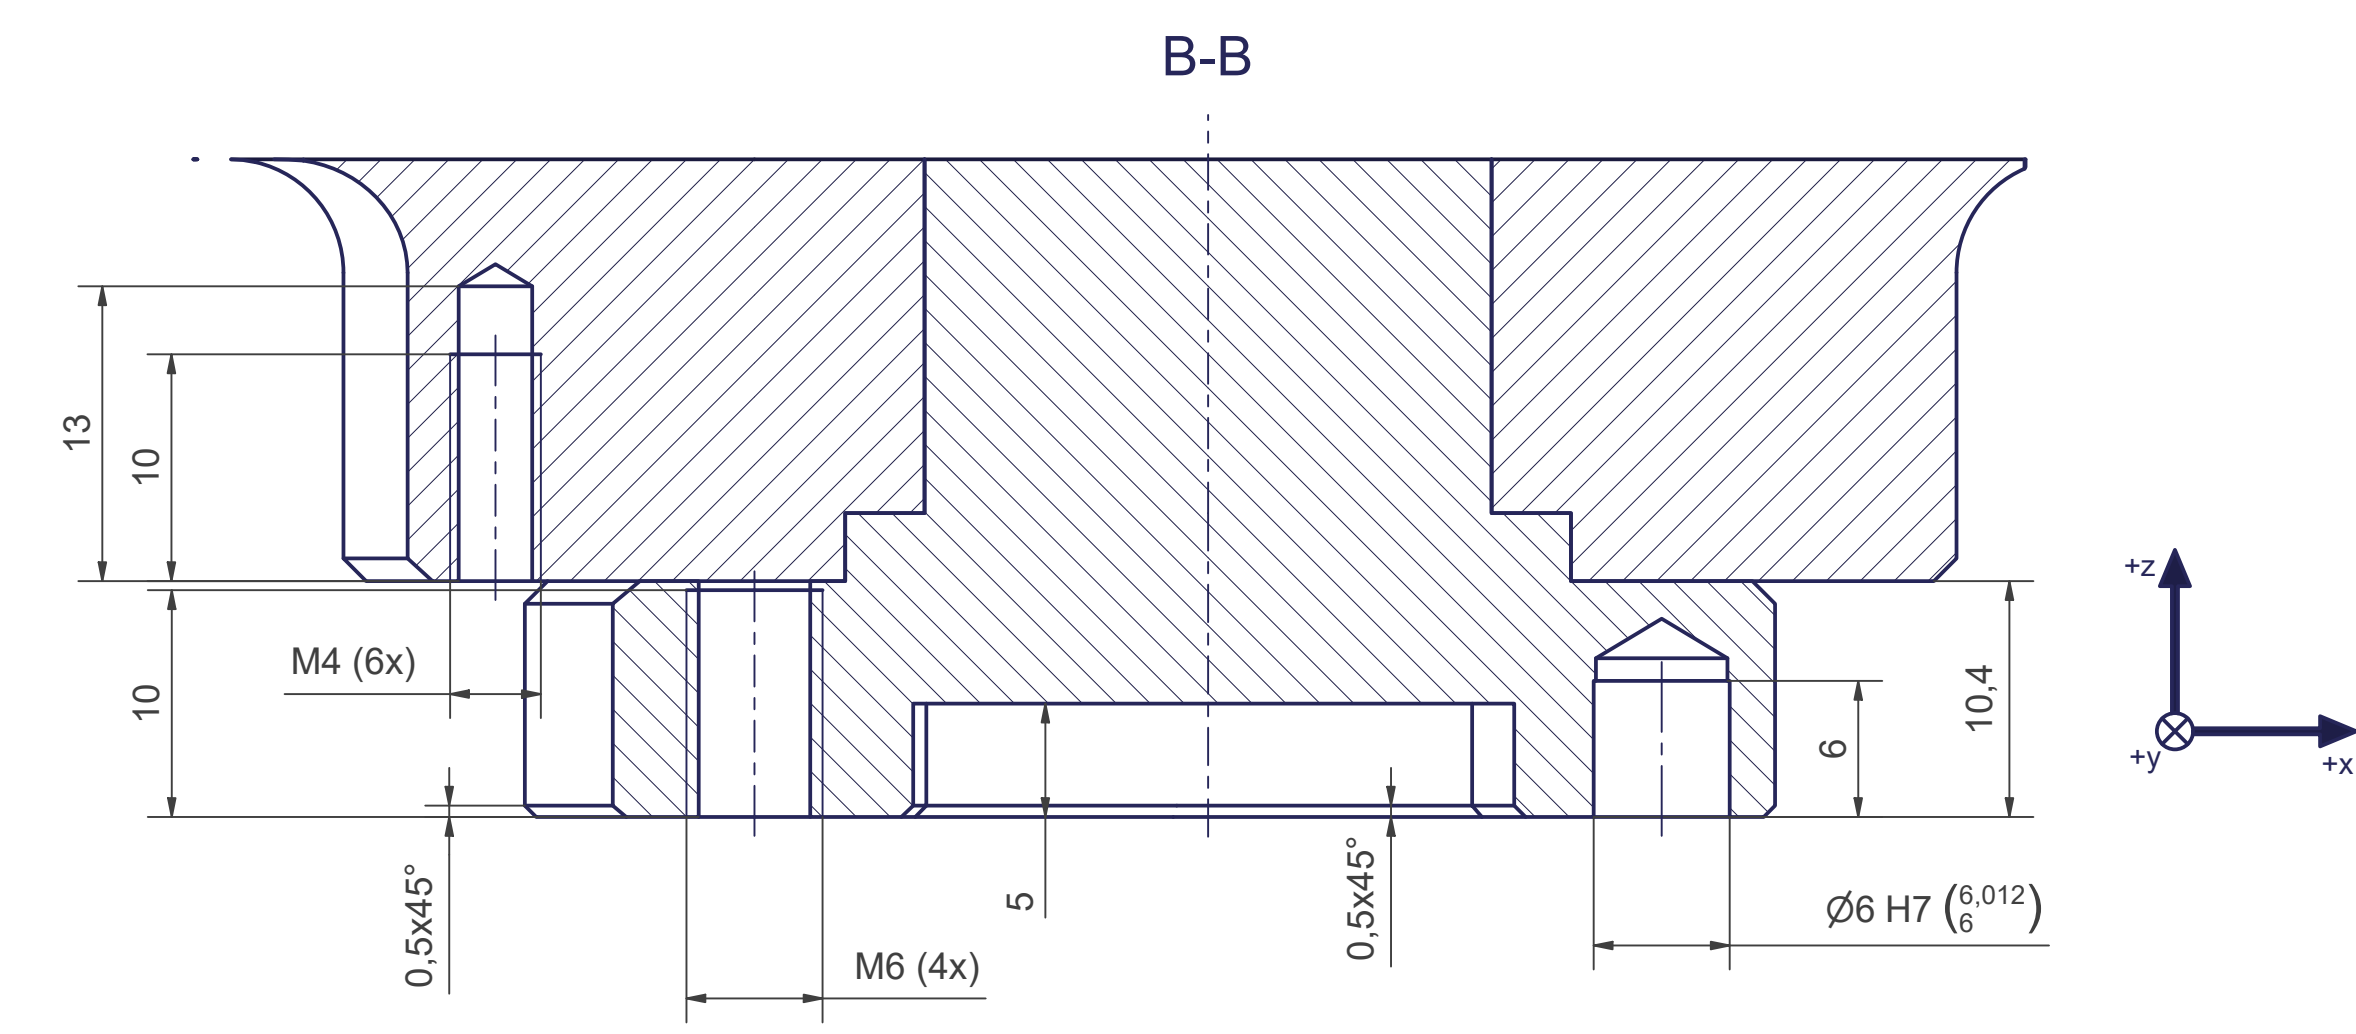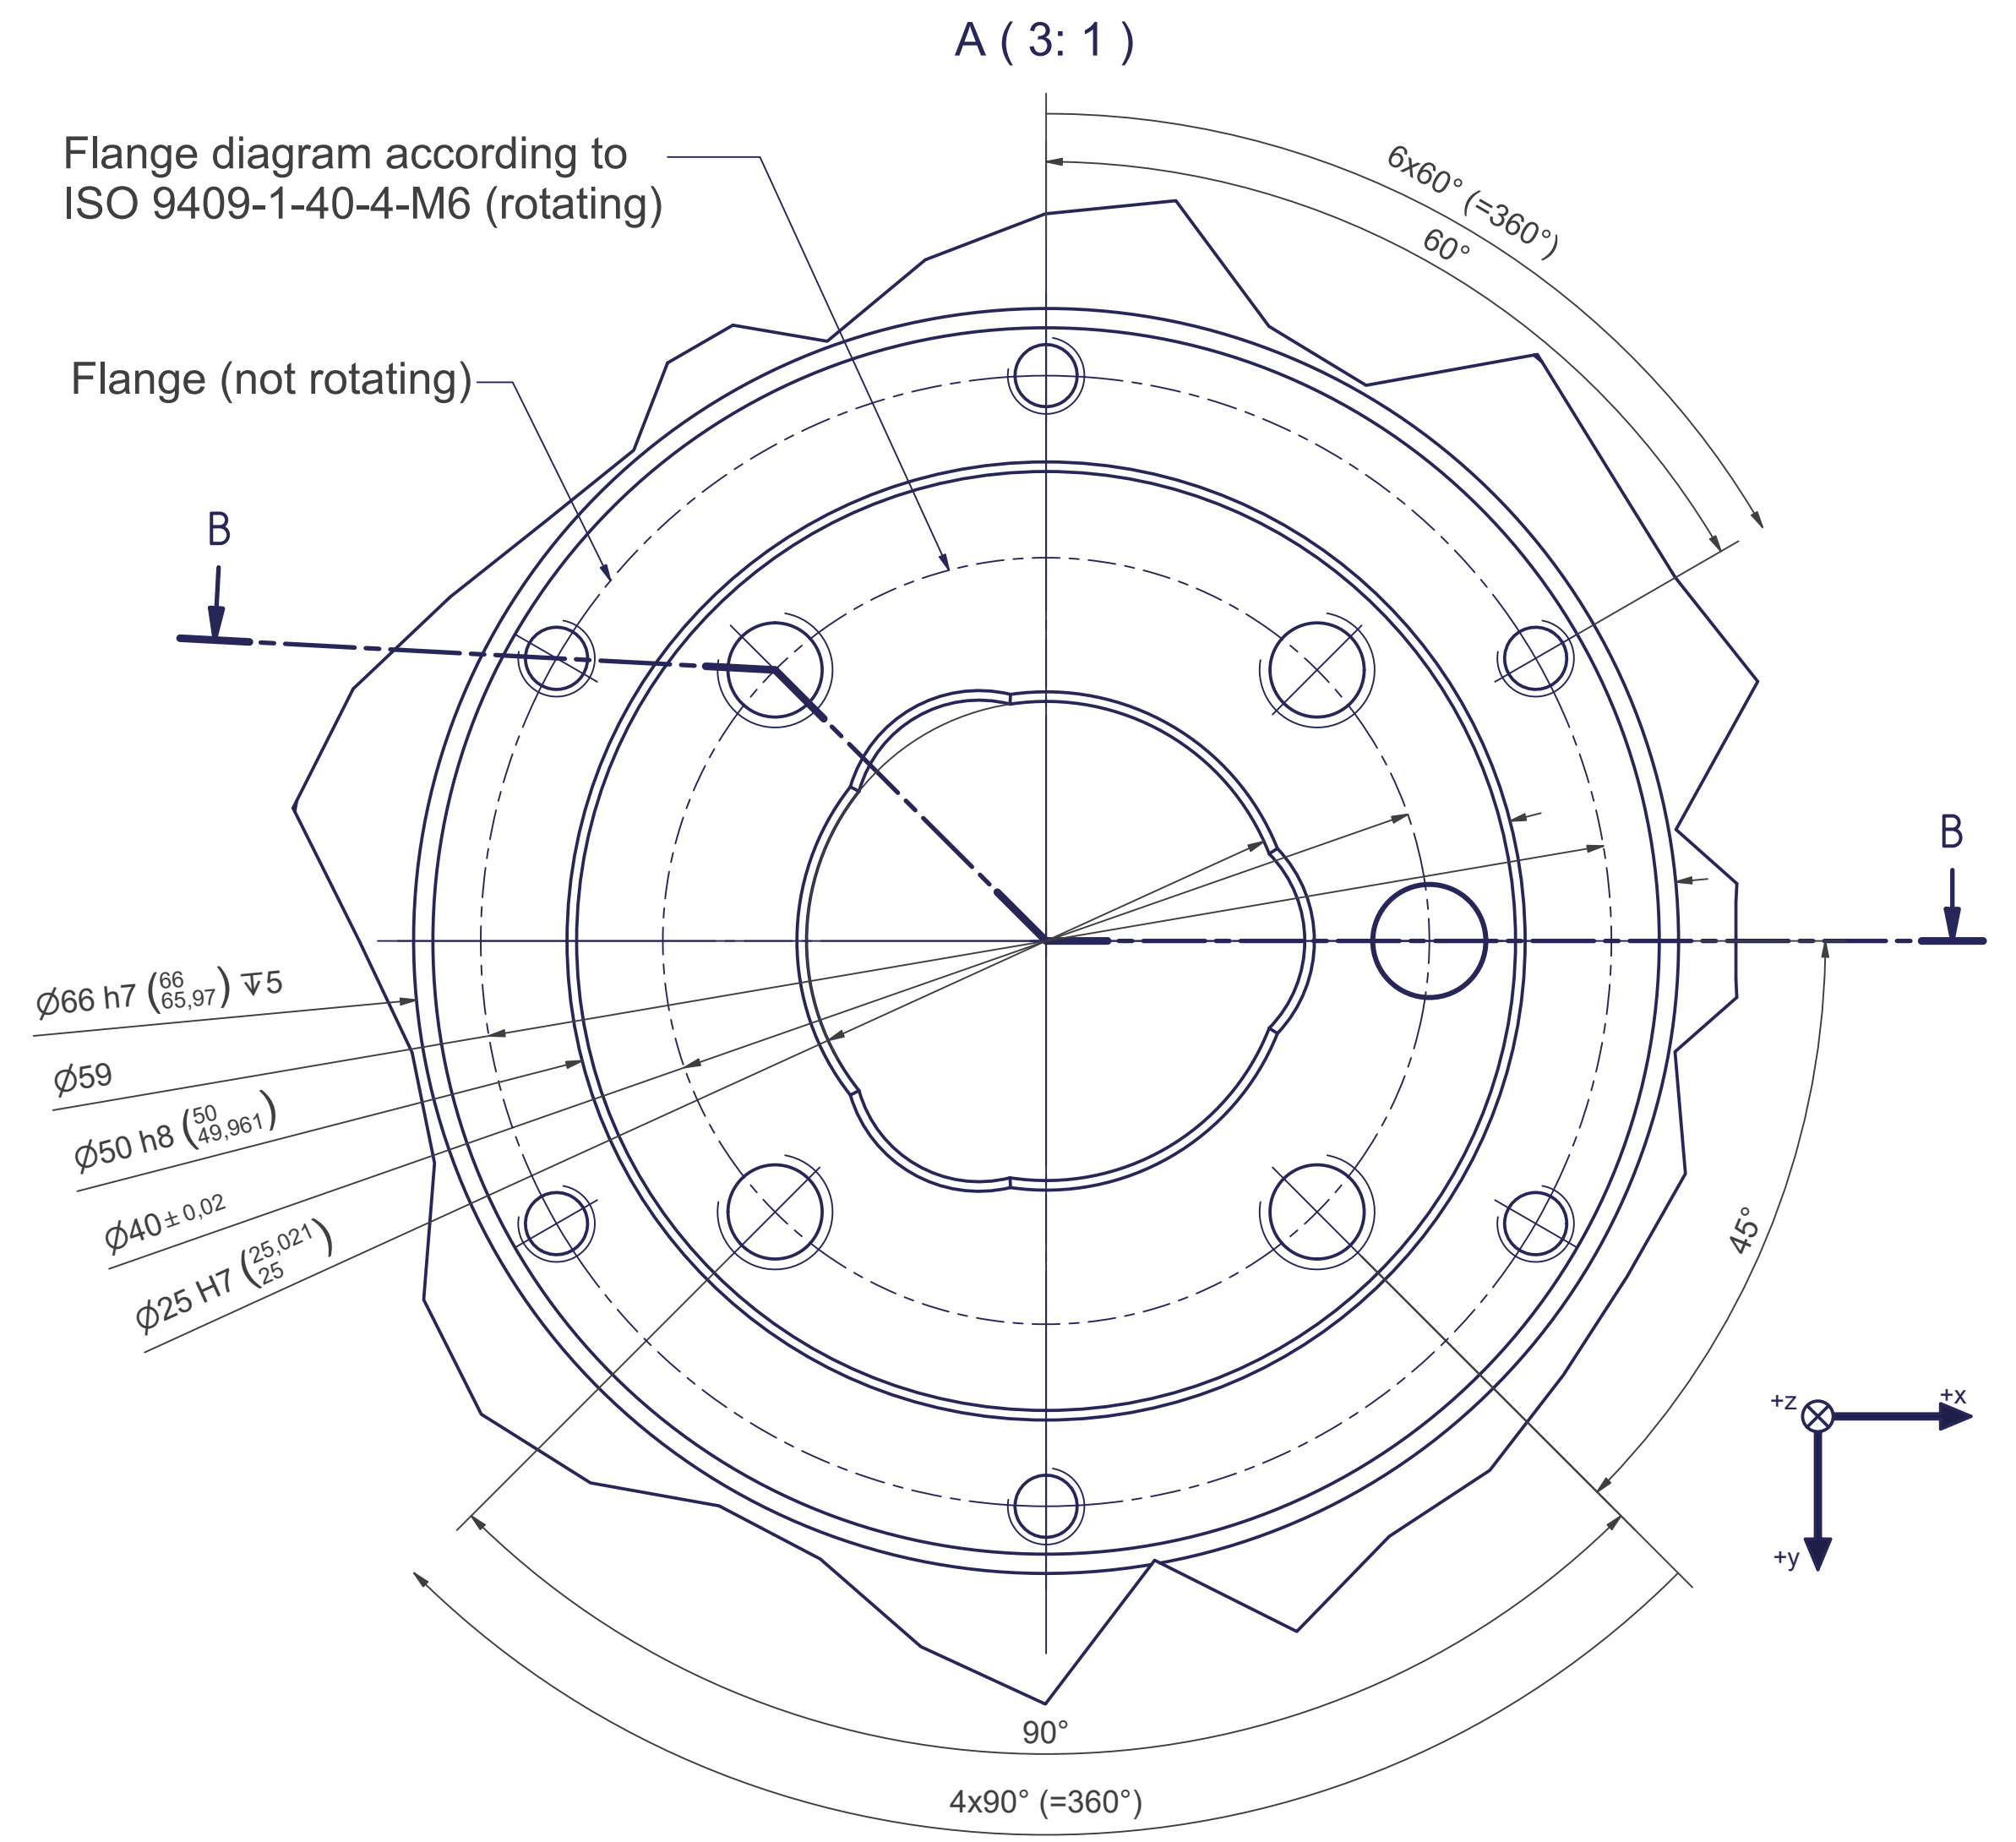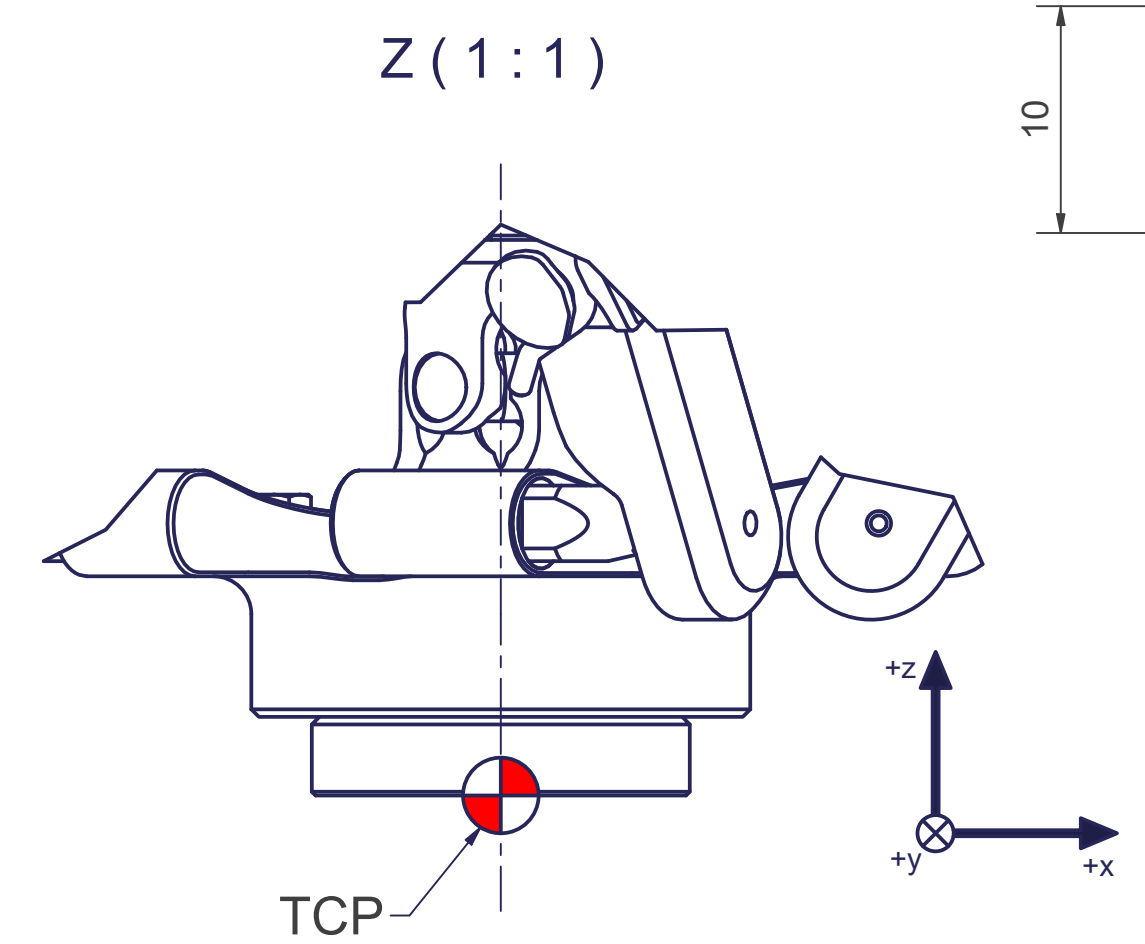




Connecting dimensions,
valid for article number AL_00030

m= kg	A	p= bar
proj. storage surface = m²		∇ = l/min
First angle projection	P= kW	
	U= V / Hz / Ph	
	Imax= A	
		autonox lean line

12 11 10 9 8 7 6 5 4 3 2 1

Thread holes for screws M12 are coloured green.
The tightening torque for these screws (strength class 8.8) is 41 Nm.

Drilling holes for location pins are filled red.
Recommended dimensions for locating pins: $\varnothing 12\text{ h}8\left(\begin{smallmatrix} 12 \\ 11,973 \end{smallmatrix}\right)$

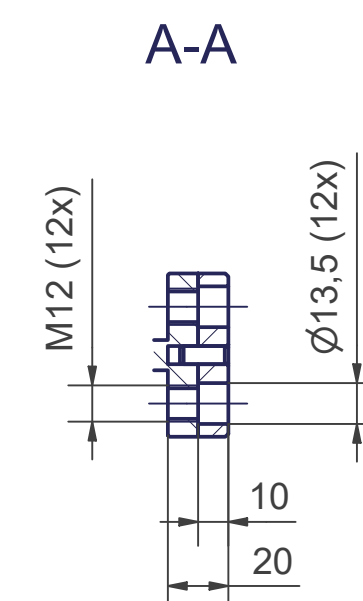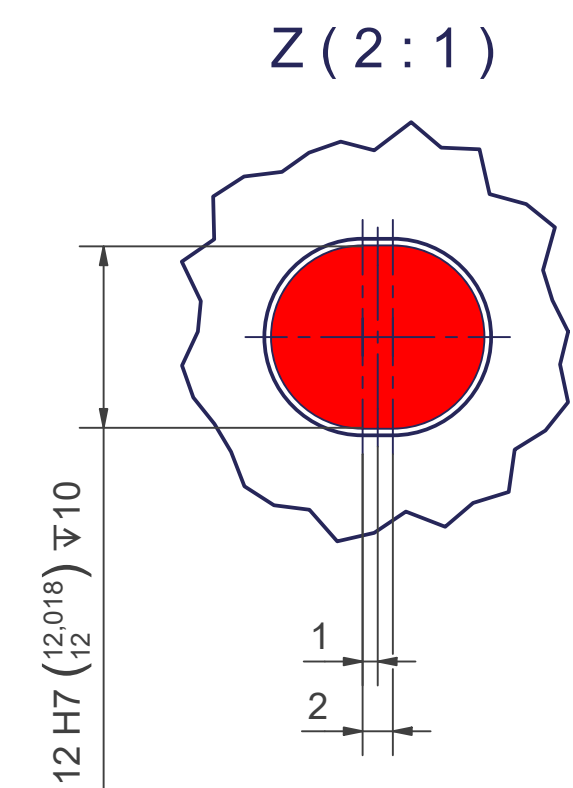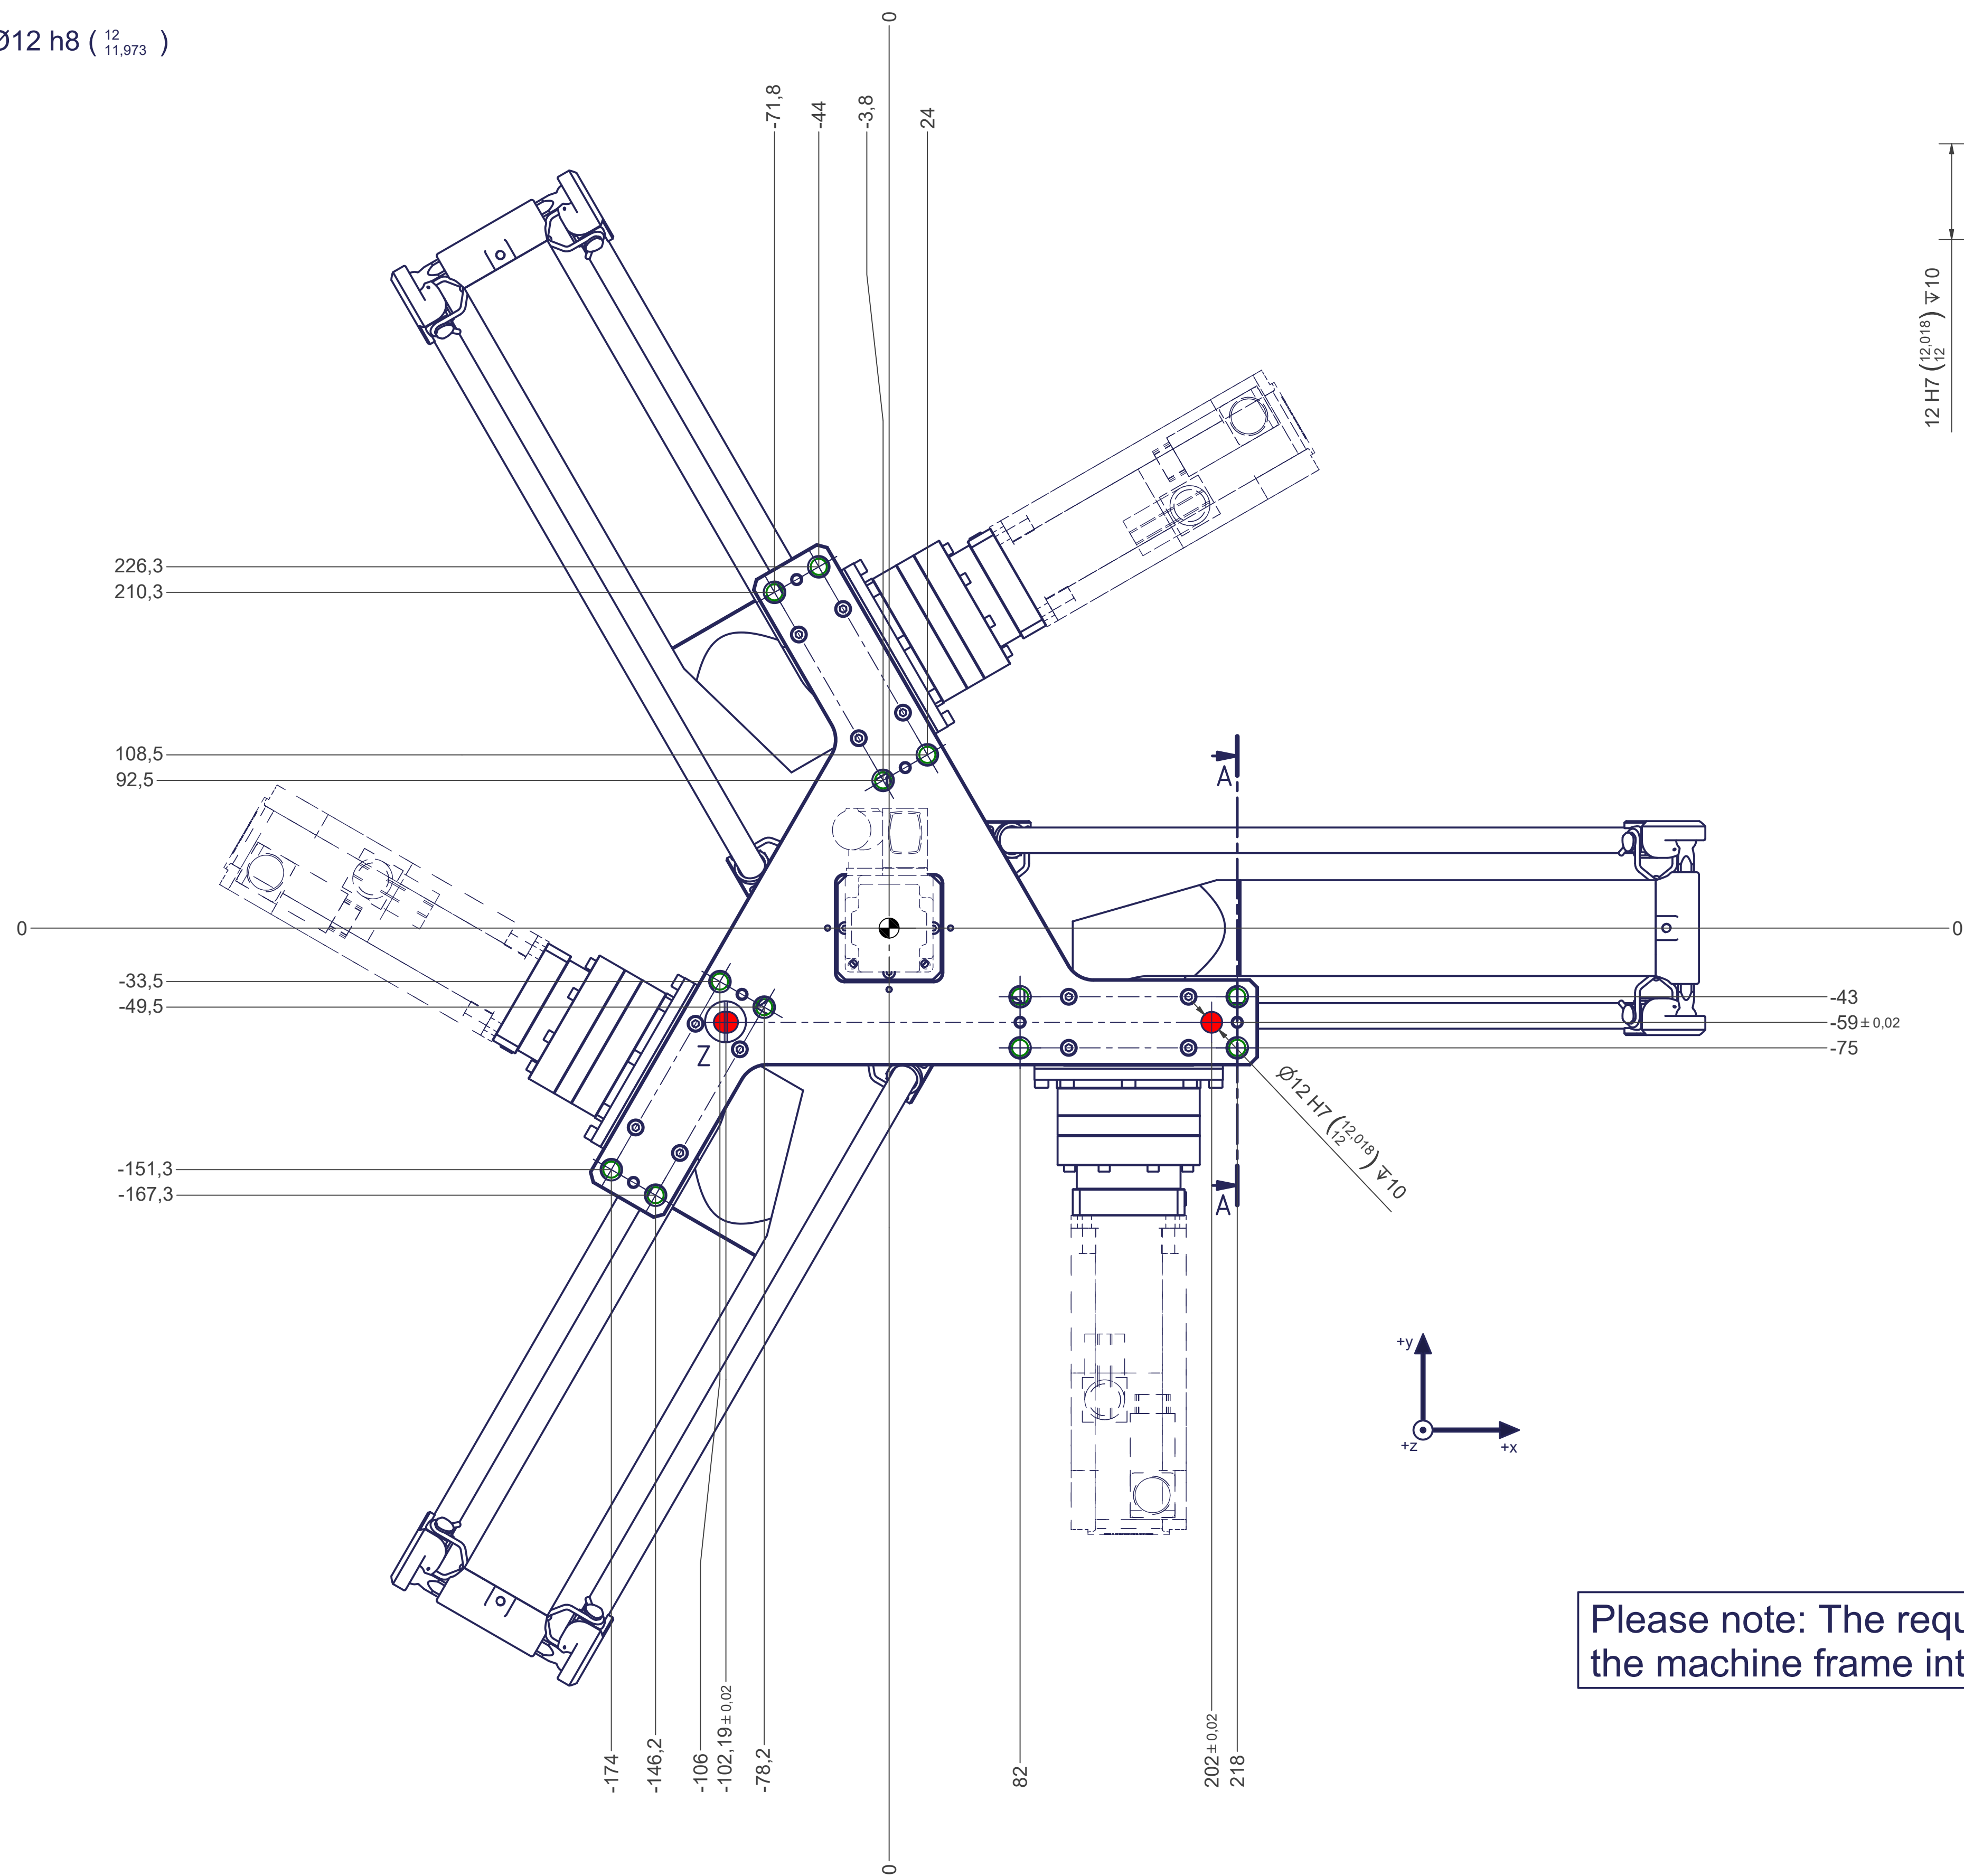

Please note: The required flatness of the machine frame interface is 0,1mm.

12 11 10 9 8 7 6 5 4 3 2 1