


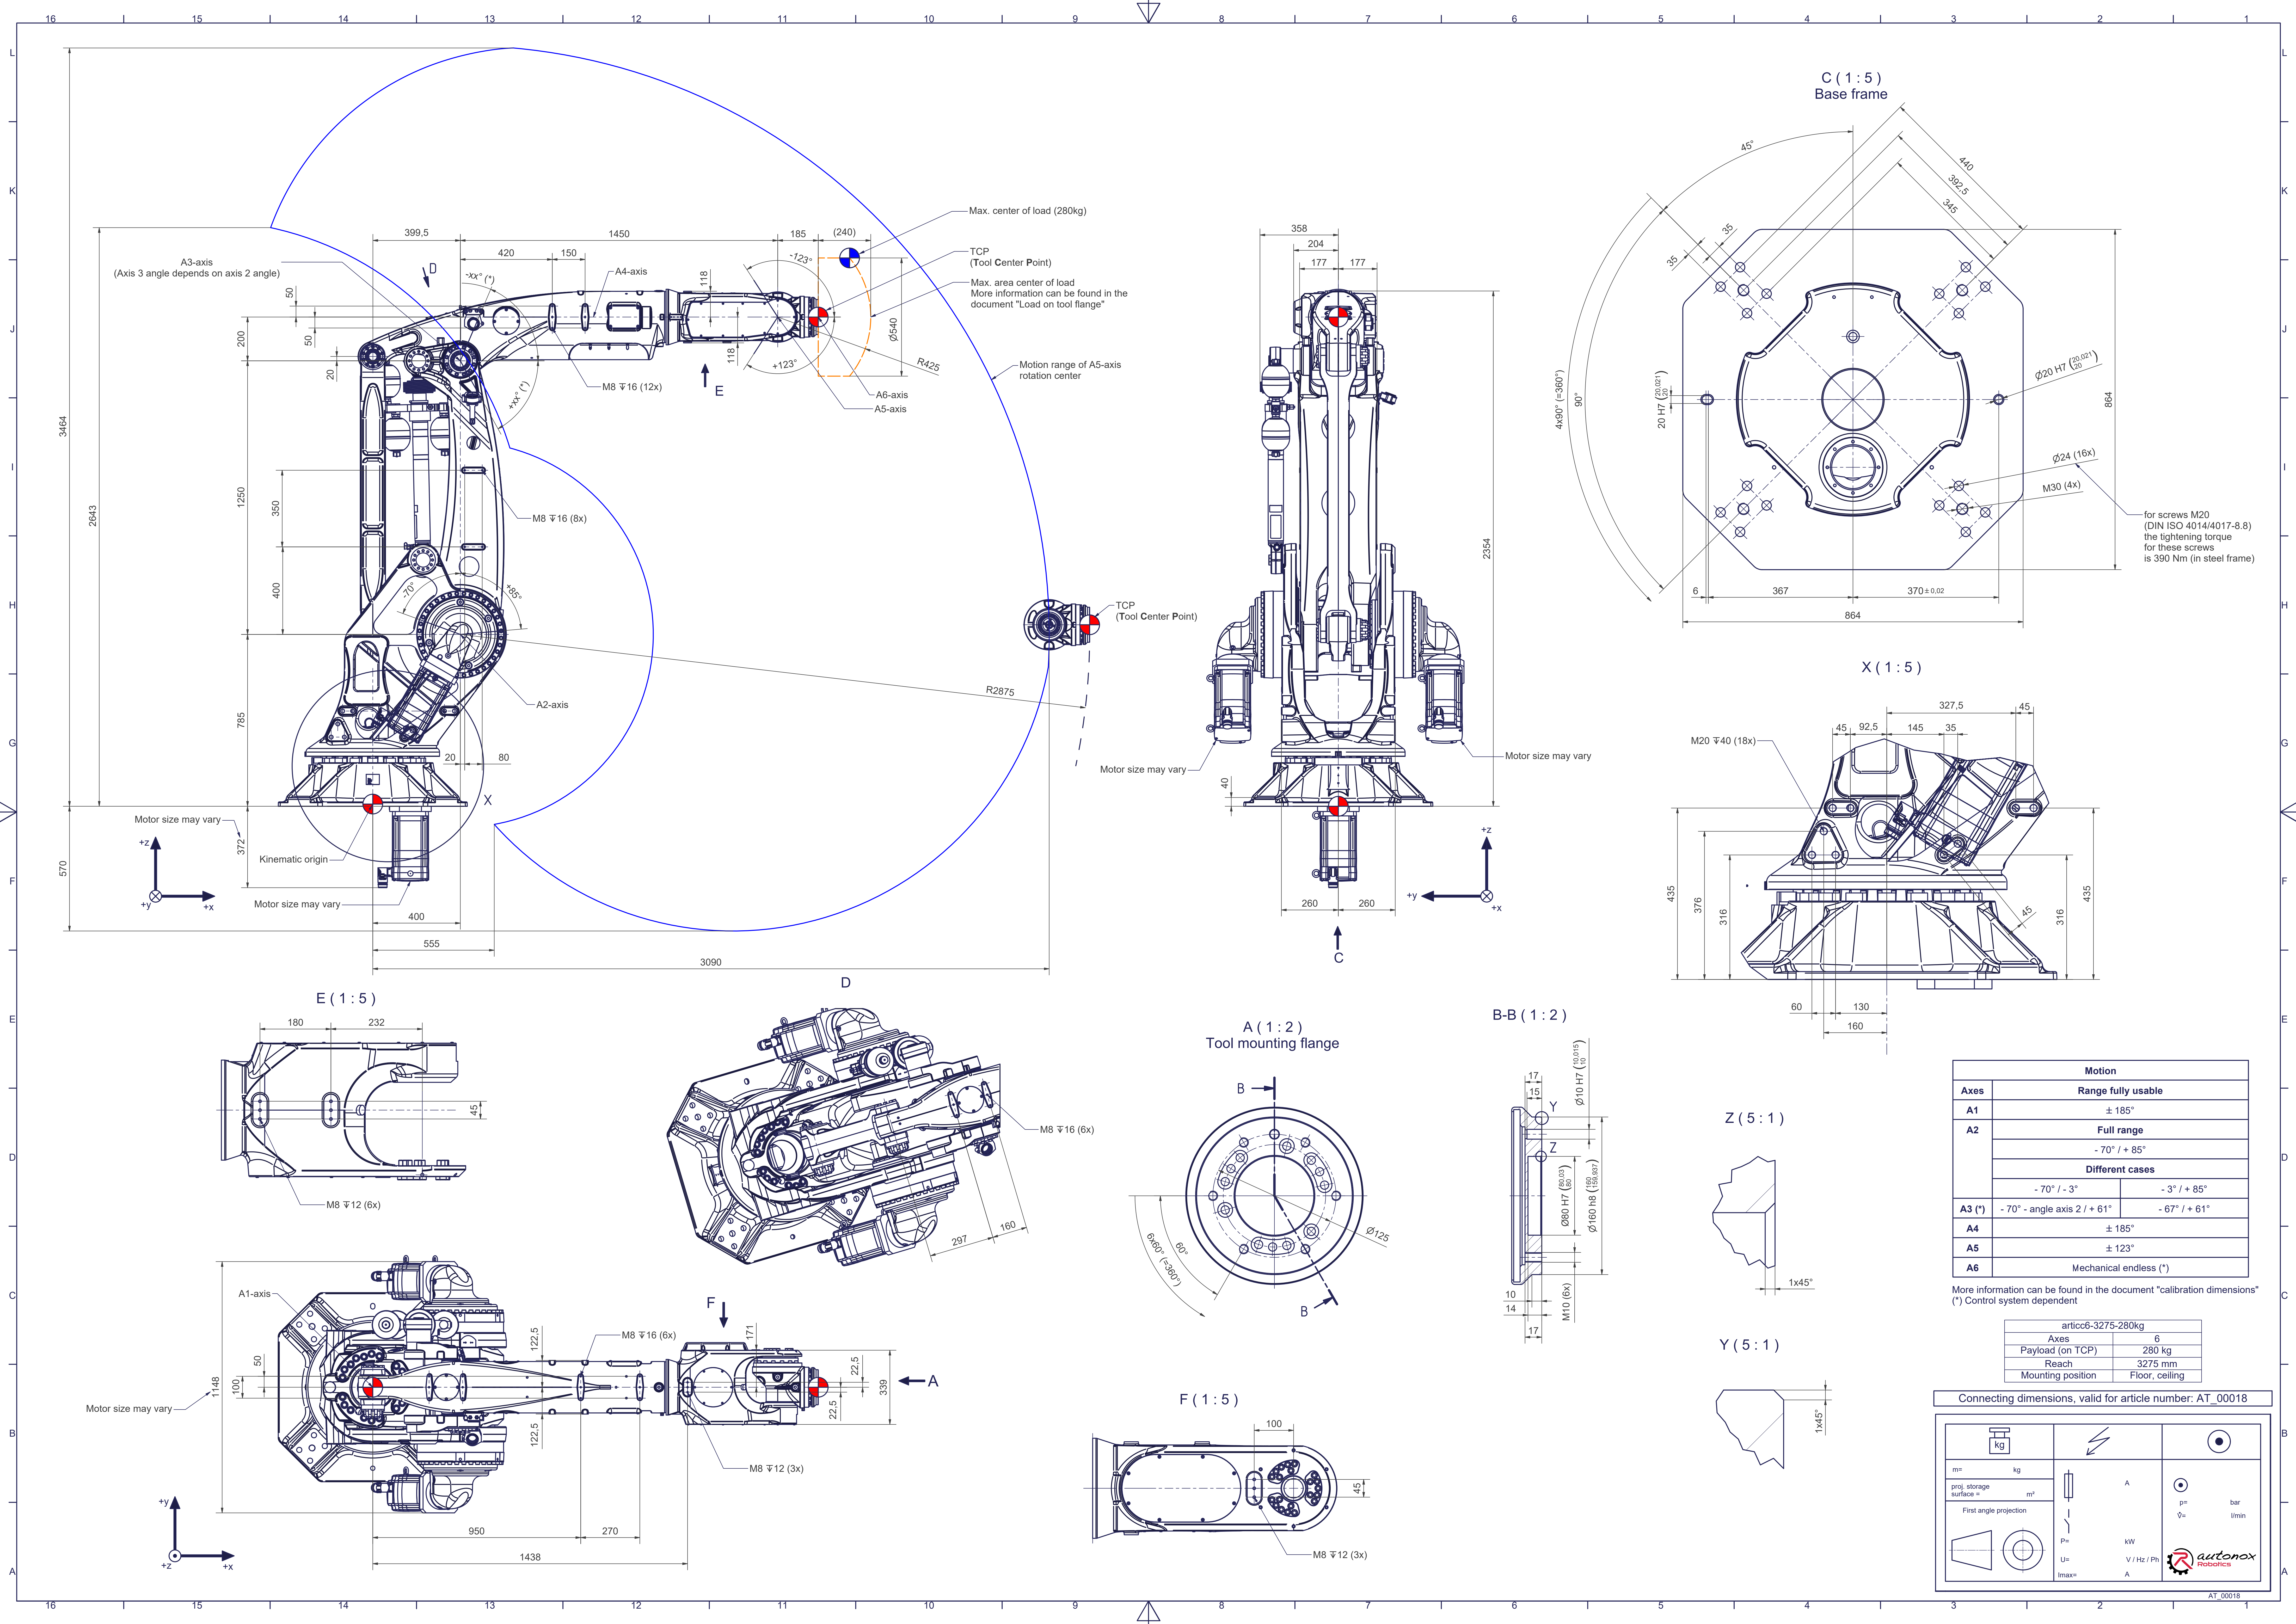

Motion	
Axes	Range fully usable
A1	± 185°
A2	Full range
	- 70° / + 85°
	Different cases
	- 70° / - 3°
	- 3° / + 85°
A3 (*)	- 70° - angle axis 2 / + 61°
	- 67° / + 61°
A4	± 185°
A5	± 123°
A6	Mechanical endless (*)

More information can be found in the document "calibration dimensions"
(*) Control system dependent

artic6-3275-280kg	
Axes	6
Payload (on TCP)	280 kg
Reach	3275 mm
Mounting position	Floor, ceiling

Connecting dimensions, valid for article number: AT_00018

m= kg	A	p= bar
proj. storage surface = m²	KW	Q= l/min
First angle projection	U= V / Hz / Ph	
	Imax= A	