

Connecting dimensions,  
valid for article number AL\_00104

m= kg	A	p= bar
proj. storage surface = m²	P= kW	$\dot{V}$ = l/min
First angle projection	U= V / Hz / Ph	I <sub>max</sub> = A
		<b>autonox</b> lean line

12

11

10

9

8

7

6

5

4

3

2

1

H

G

F

E

D

C

B

A

12

11

10

9

8

7

6



5


4

3

2

1

-  Thread holes for screws M12 are coloured green.  
The tightening torque for these screws (strength class 8.8) is 41 Nm.
-  Drilling holes for location pins are filled red.  
Recommended dimensions for locating pins:  $\varnothing 12 \text{ h}8 \left( \begin{smallmatrix} 12 \\ 11,973 \end{smallmatrix} \right)$

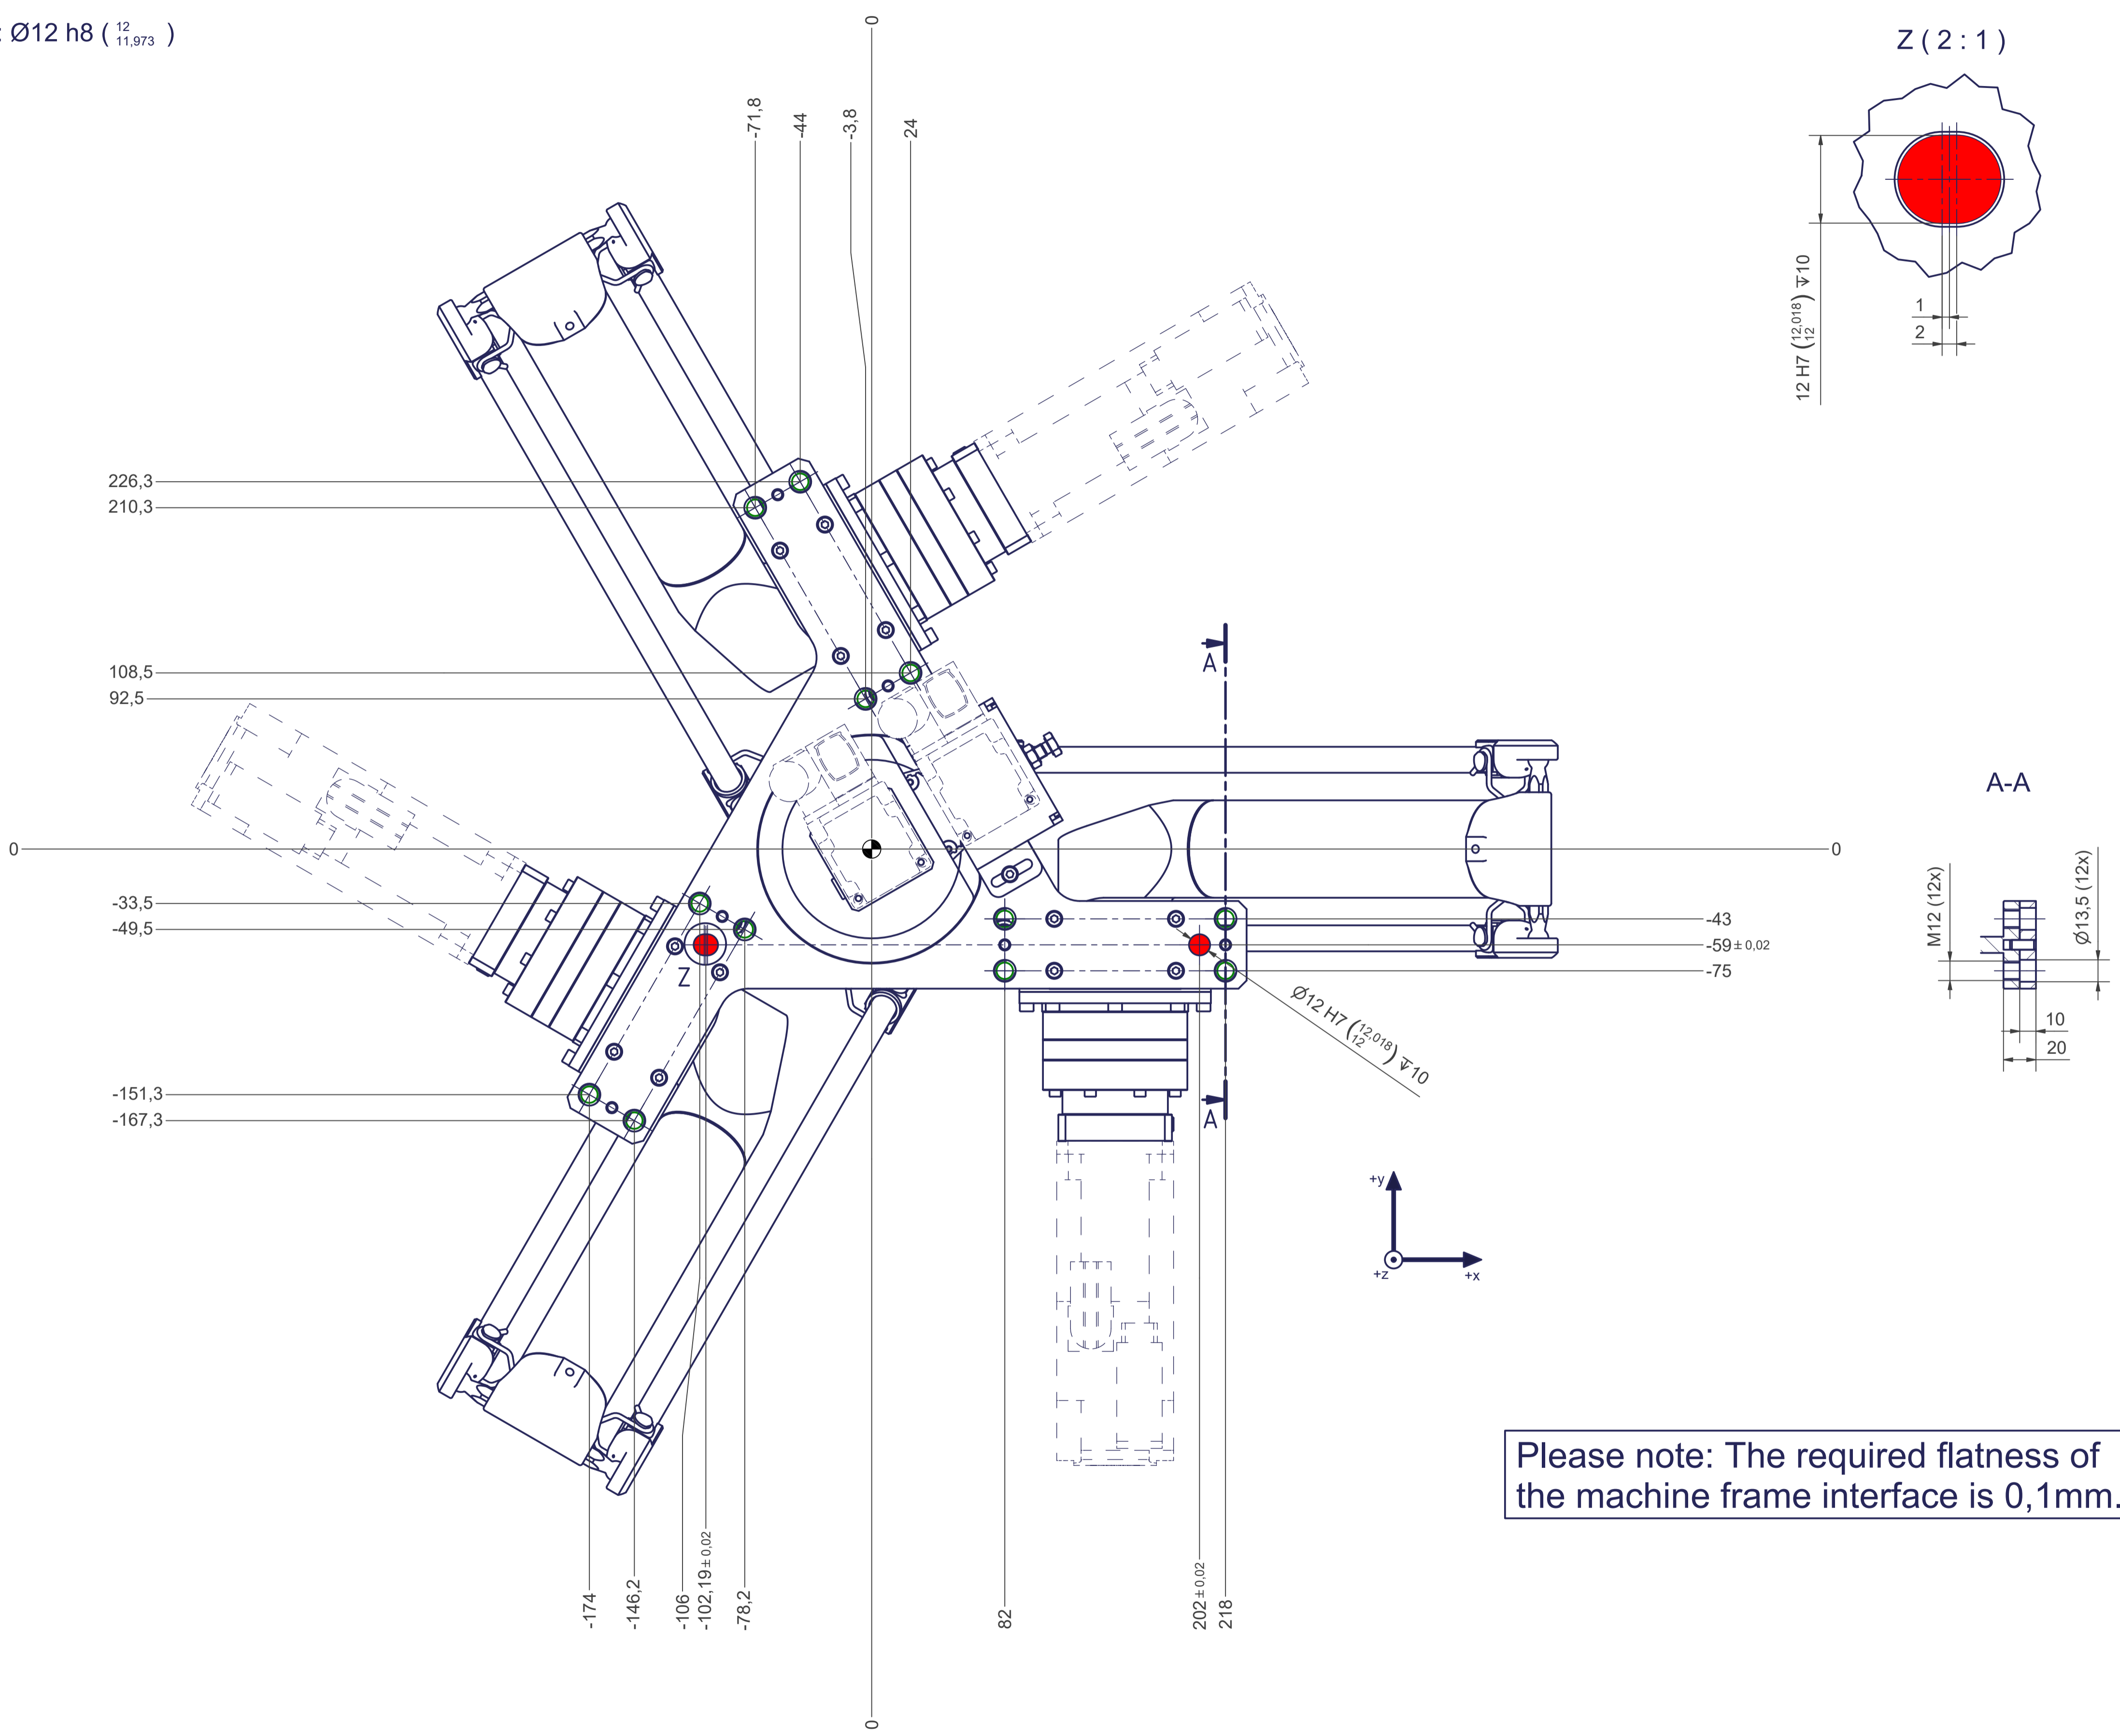

Please note: The required flatness of the machine frame interface is 0,1mm.