


Tool Center Point
TCP (on the plane of the flange)

TCP - working range

Depending on the drive type



Interference contour from machine body

Maximum interference contour

Flange diagramm according to ISO 9409-1-125-6-M10

A (1:1)

B-B

Z (1:2)

TCP

Screws strength class 8.8
Fasten with max. 40 Nm
Do not use bonding agent.

Connecting dimensions, valid for article number A_00063-01

m= kg	A	p= bar
proj. storage surface = m²		v̇= l/min
First angle projection	P= kW	
	U= V / Hz / Ph	autonox Robotics
	Imax= A	A_00063-01

12

11

10

9

8

7

6


5

4


3

2


1




All fastening holes $\varnothing 22$ for screws M20 (DIN ISO 4014/4017 -8.8) without washer. Fastening holes are coloured red.



Drilling holes for locating pins are filled red. Recommended dimensions of locating pins: $\varnothing 12$ h6



Thread holes for screws M20 are coloured green. The tightening torque for these screws (strength class 8.8) is 170 Nm.

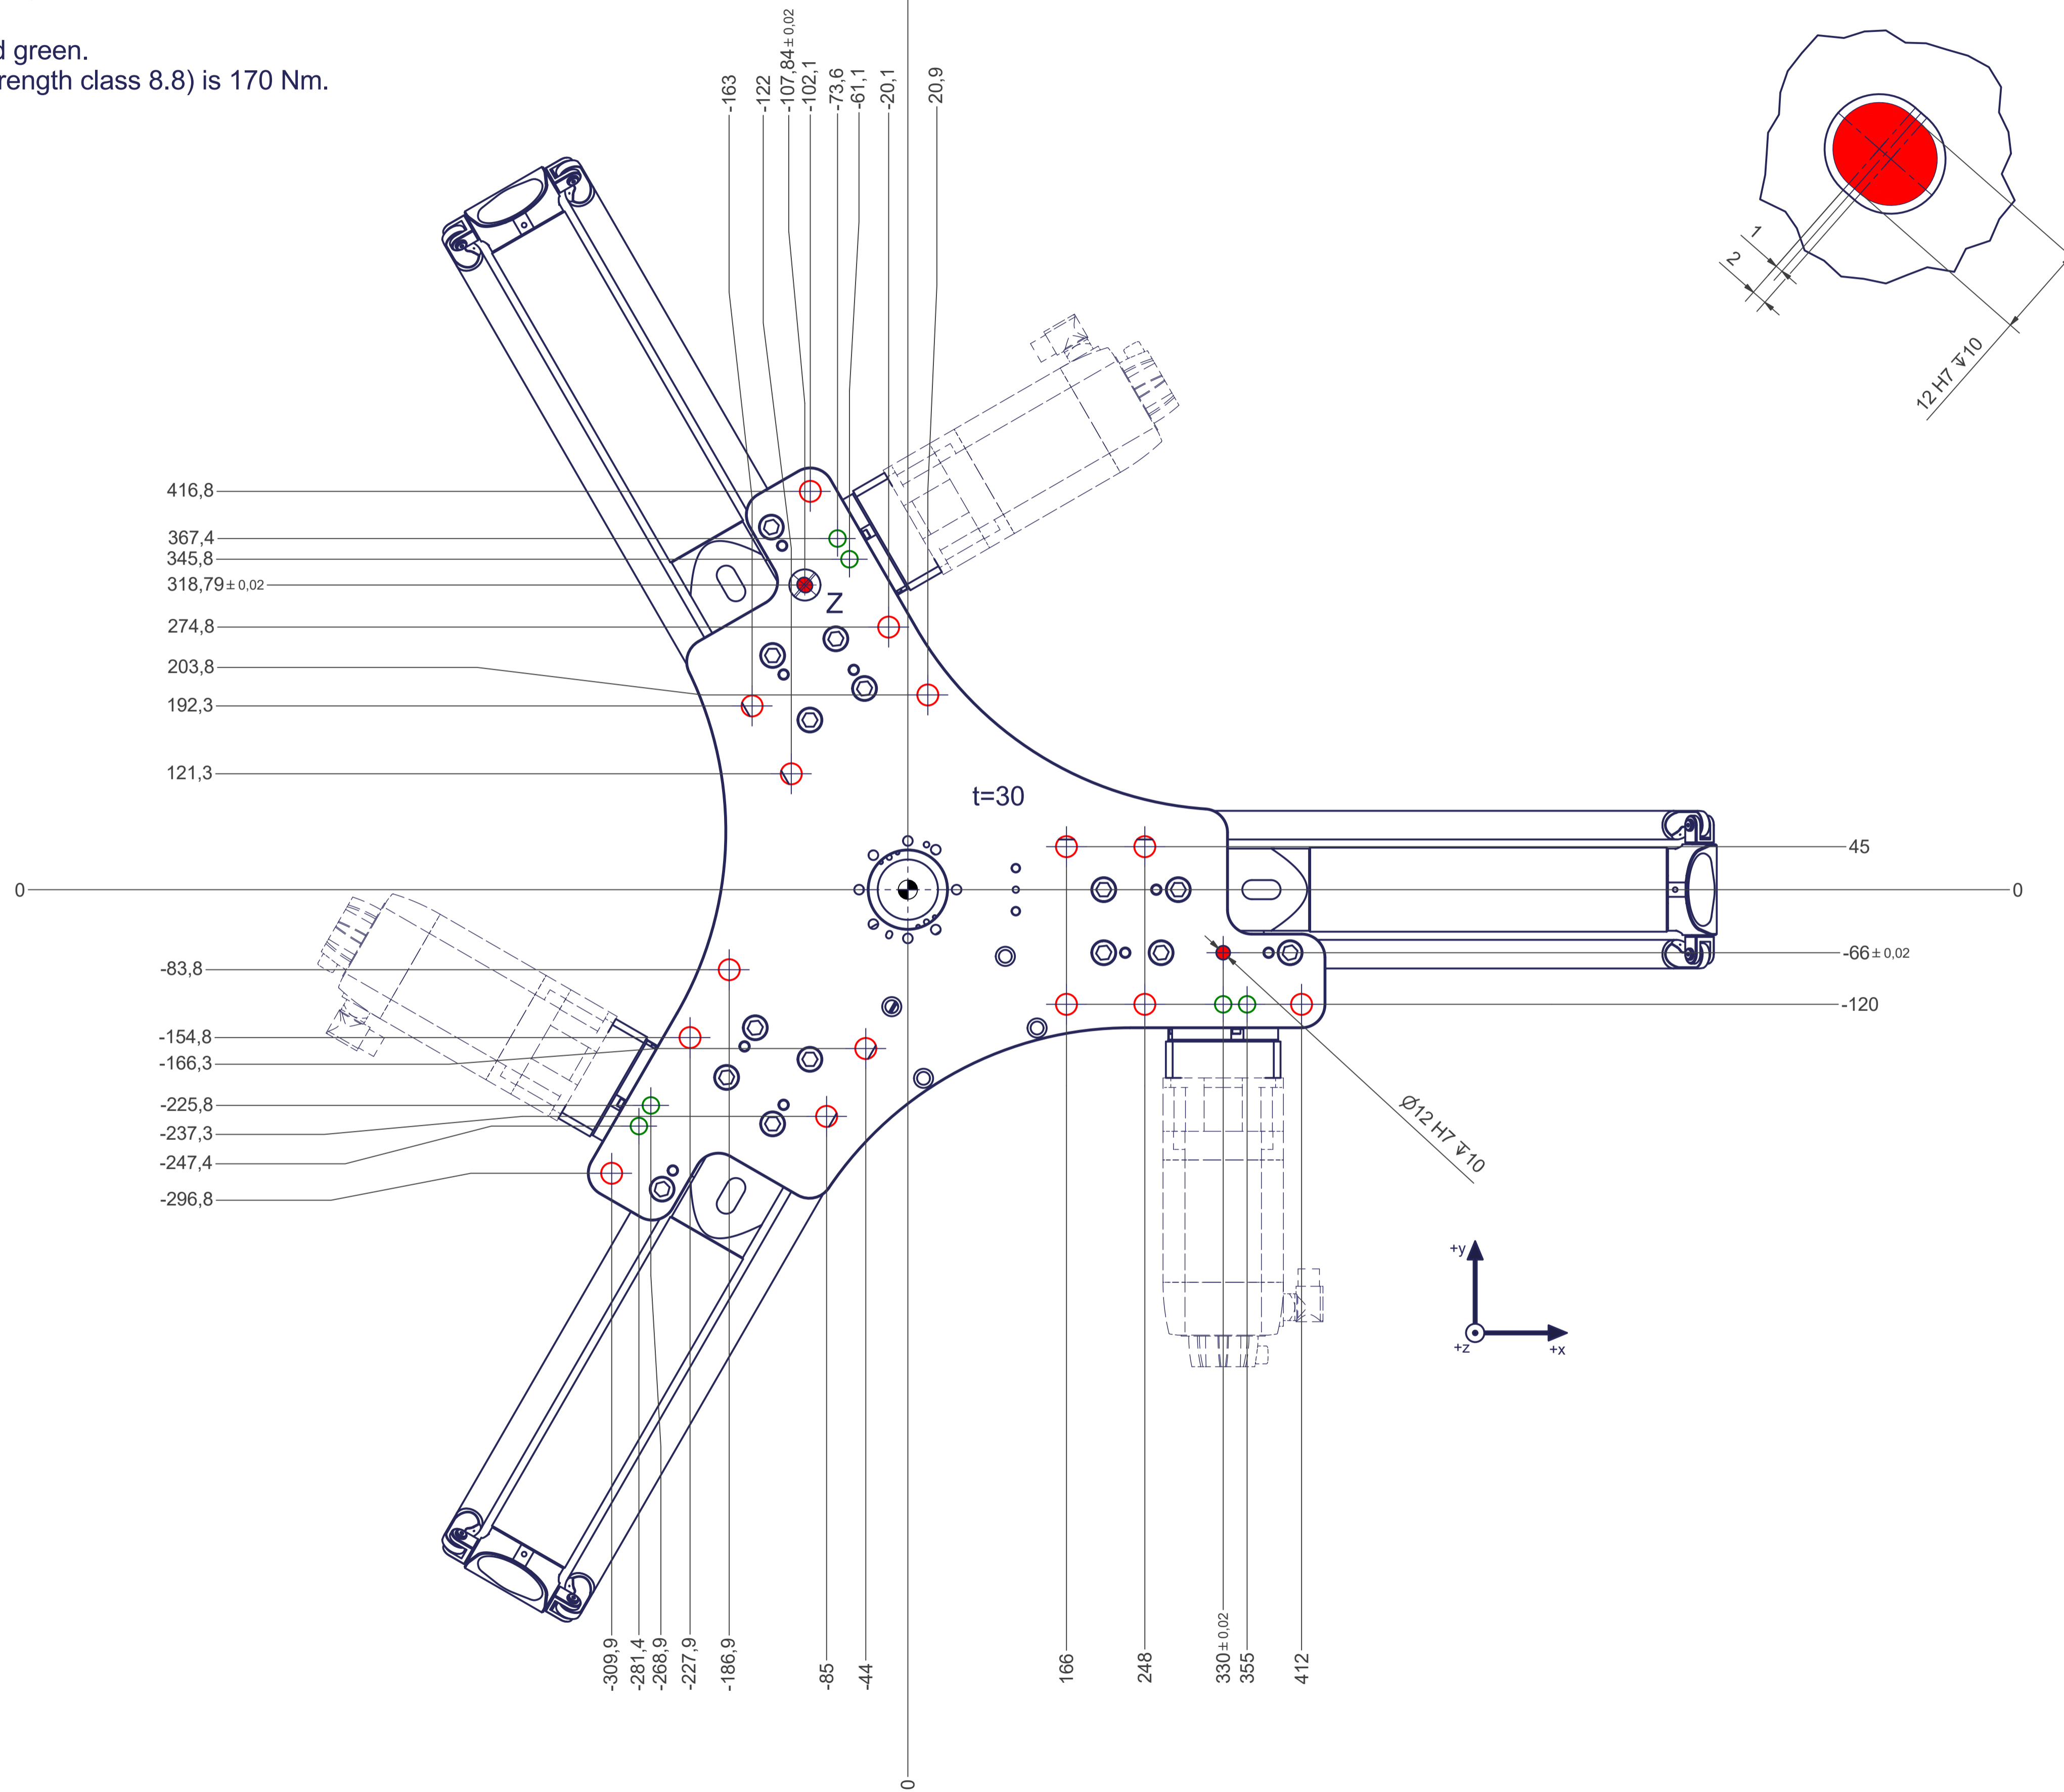

12

11

10

9

8

7

6

5

4

3

2

1