


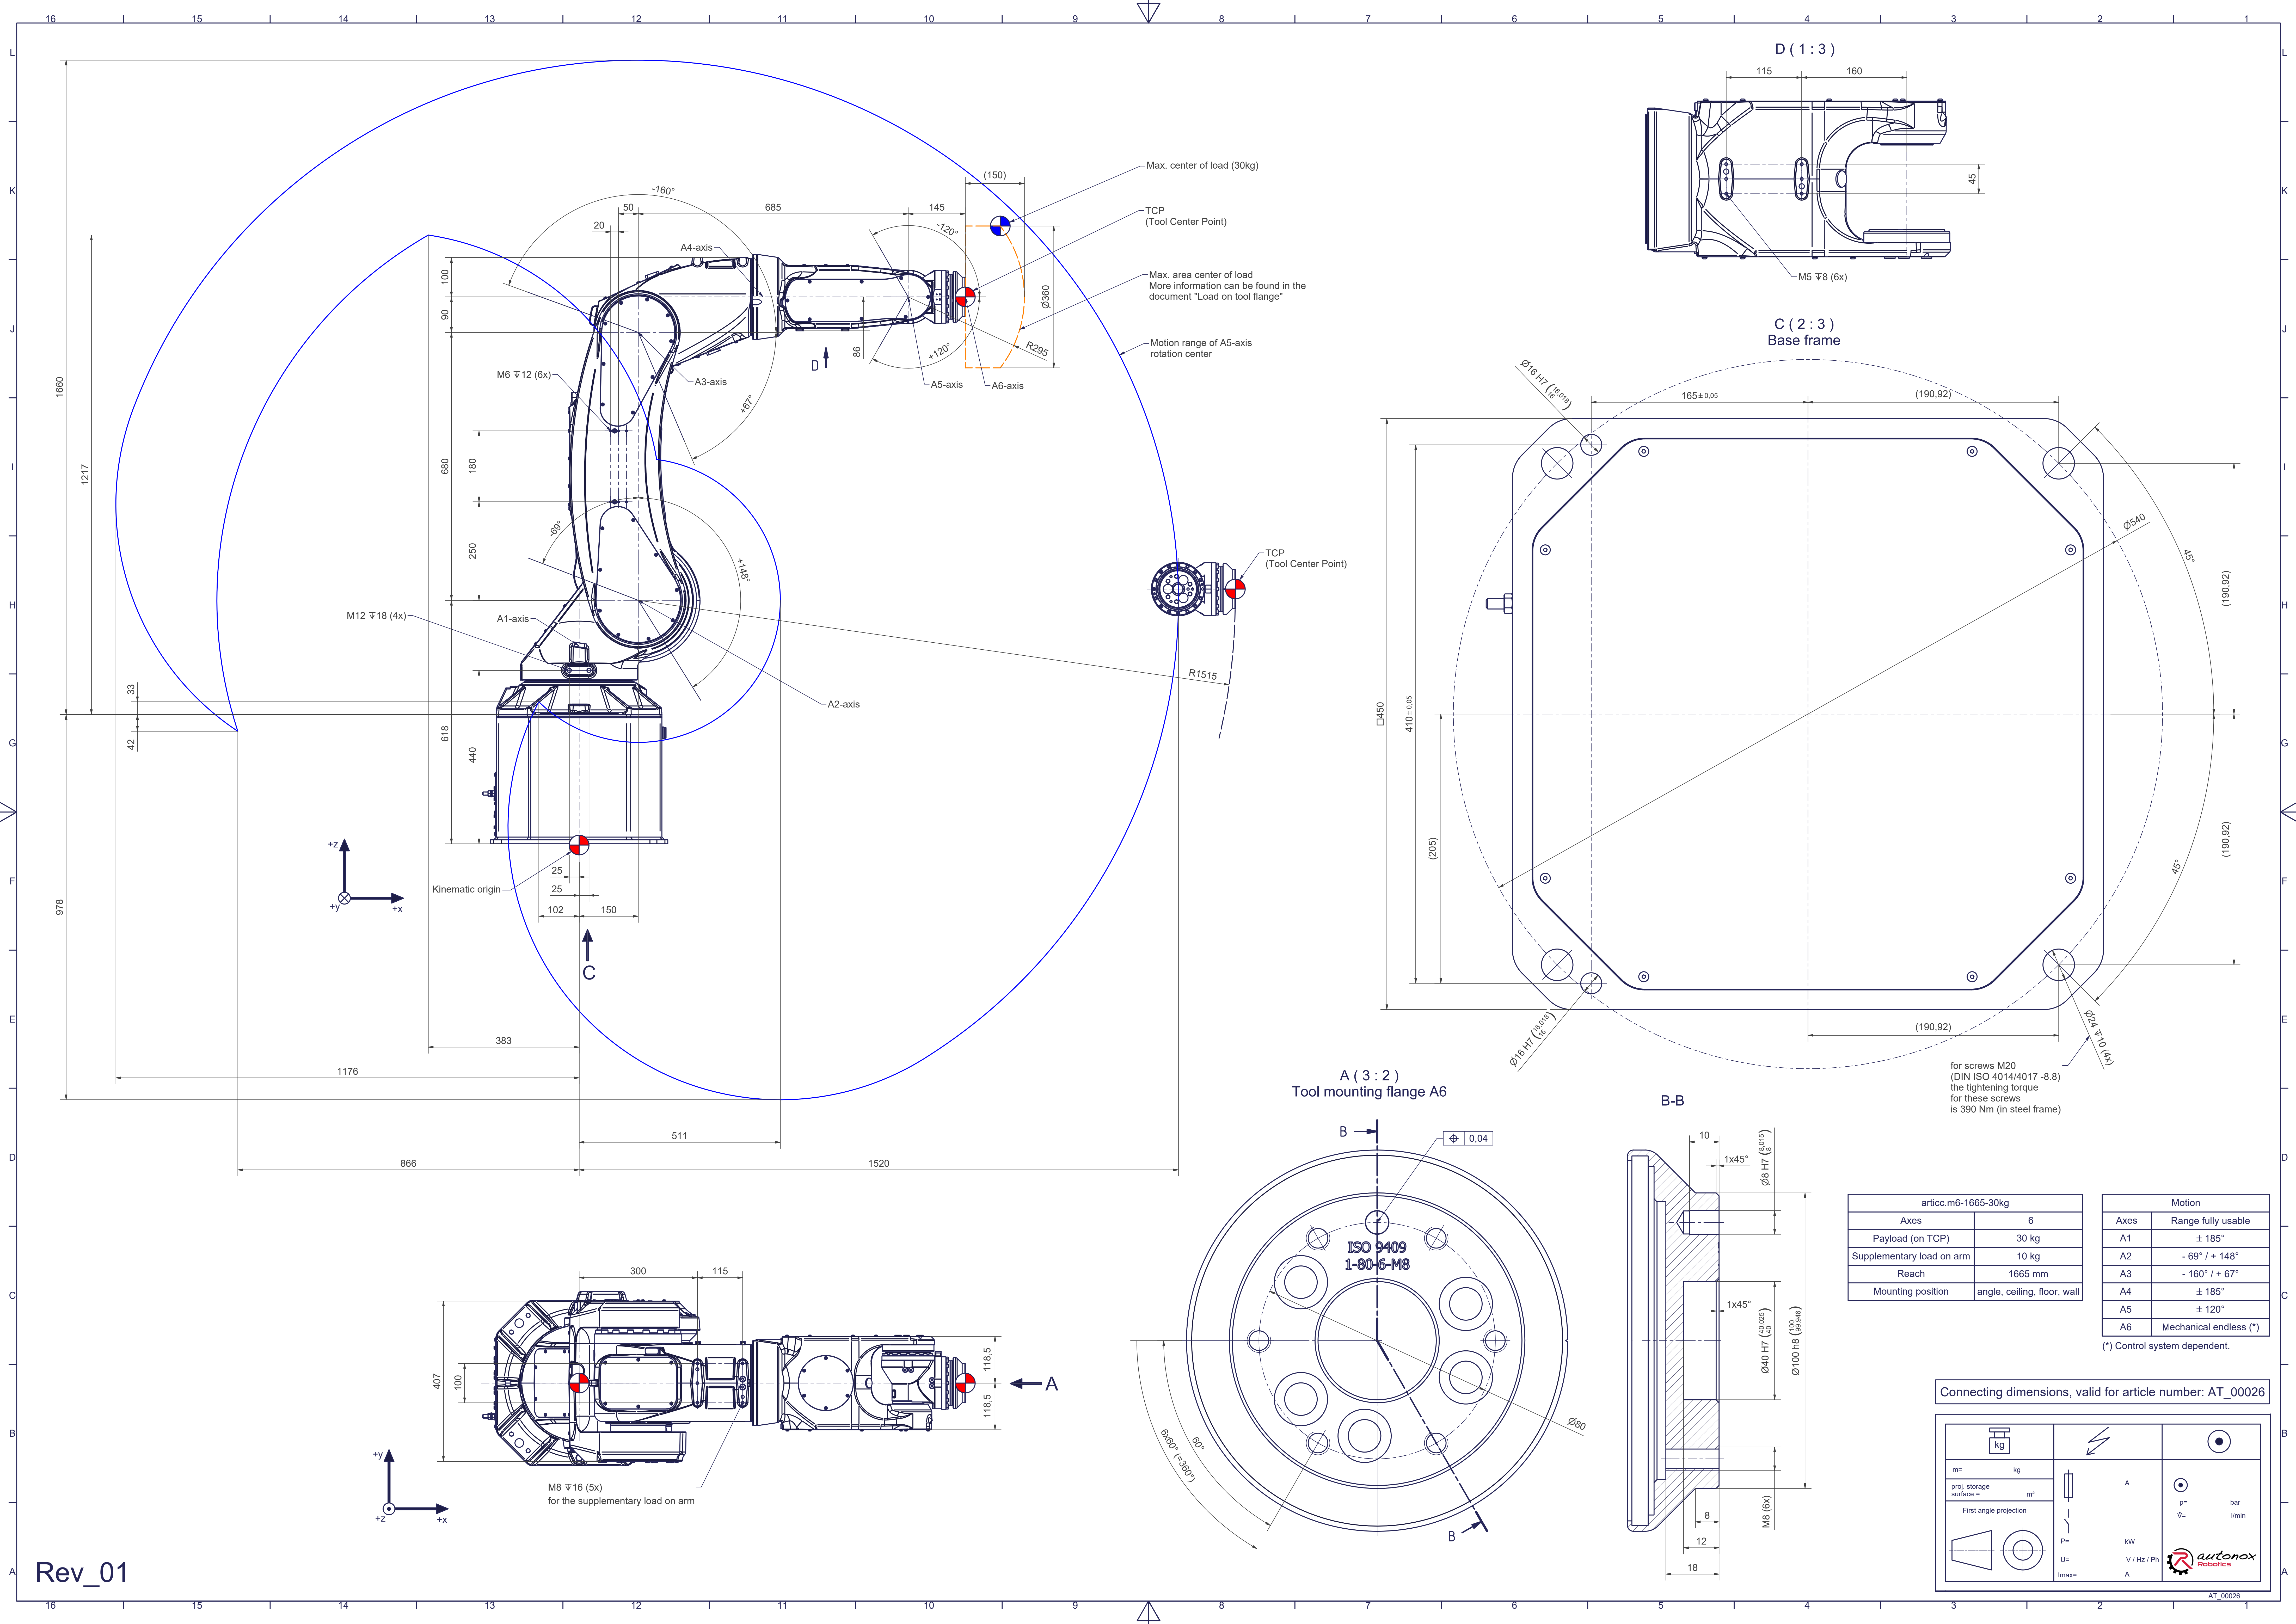

Rev_01

articc.m6-1665-30kg		Motion	
Axes	6	Axes	Range fully usable
Payload (on TCP)	30 kg	A1	± 185°
Supplementary load on arm	10 kg	A2	- 69° / + 148°
Reach	1665 mm	A3	- 160° / + 67°
Mounting position	angle, ceiling, floor, wall	A4	± 185°
		A5	± 120°
		A6	Mechanical endless (*)

(*) Control system dependent.

Connecting dimensions, valid for article number: AT_00026

m= kg	A	p= bar
proj. storage surface = m²		ψ= l/min
First angle projection	P= kW	
	U= V / Hz / Ph	
	Imax= A	



AT_00026