



Tool Center Point
TCP (on the plane of the flange)

TCP - working range

Depending on
the drive type

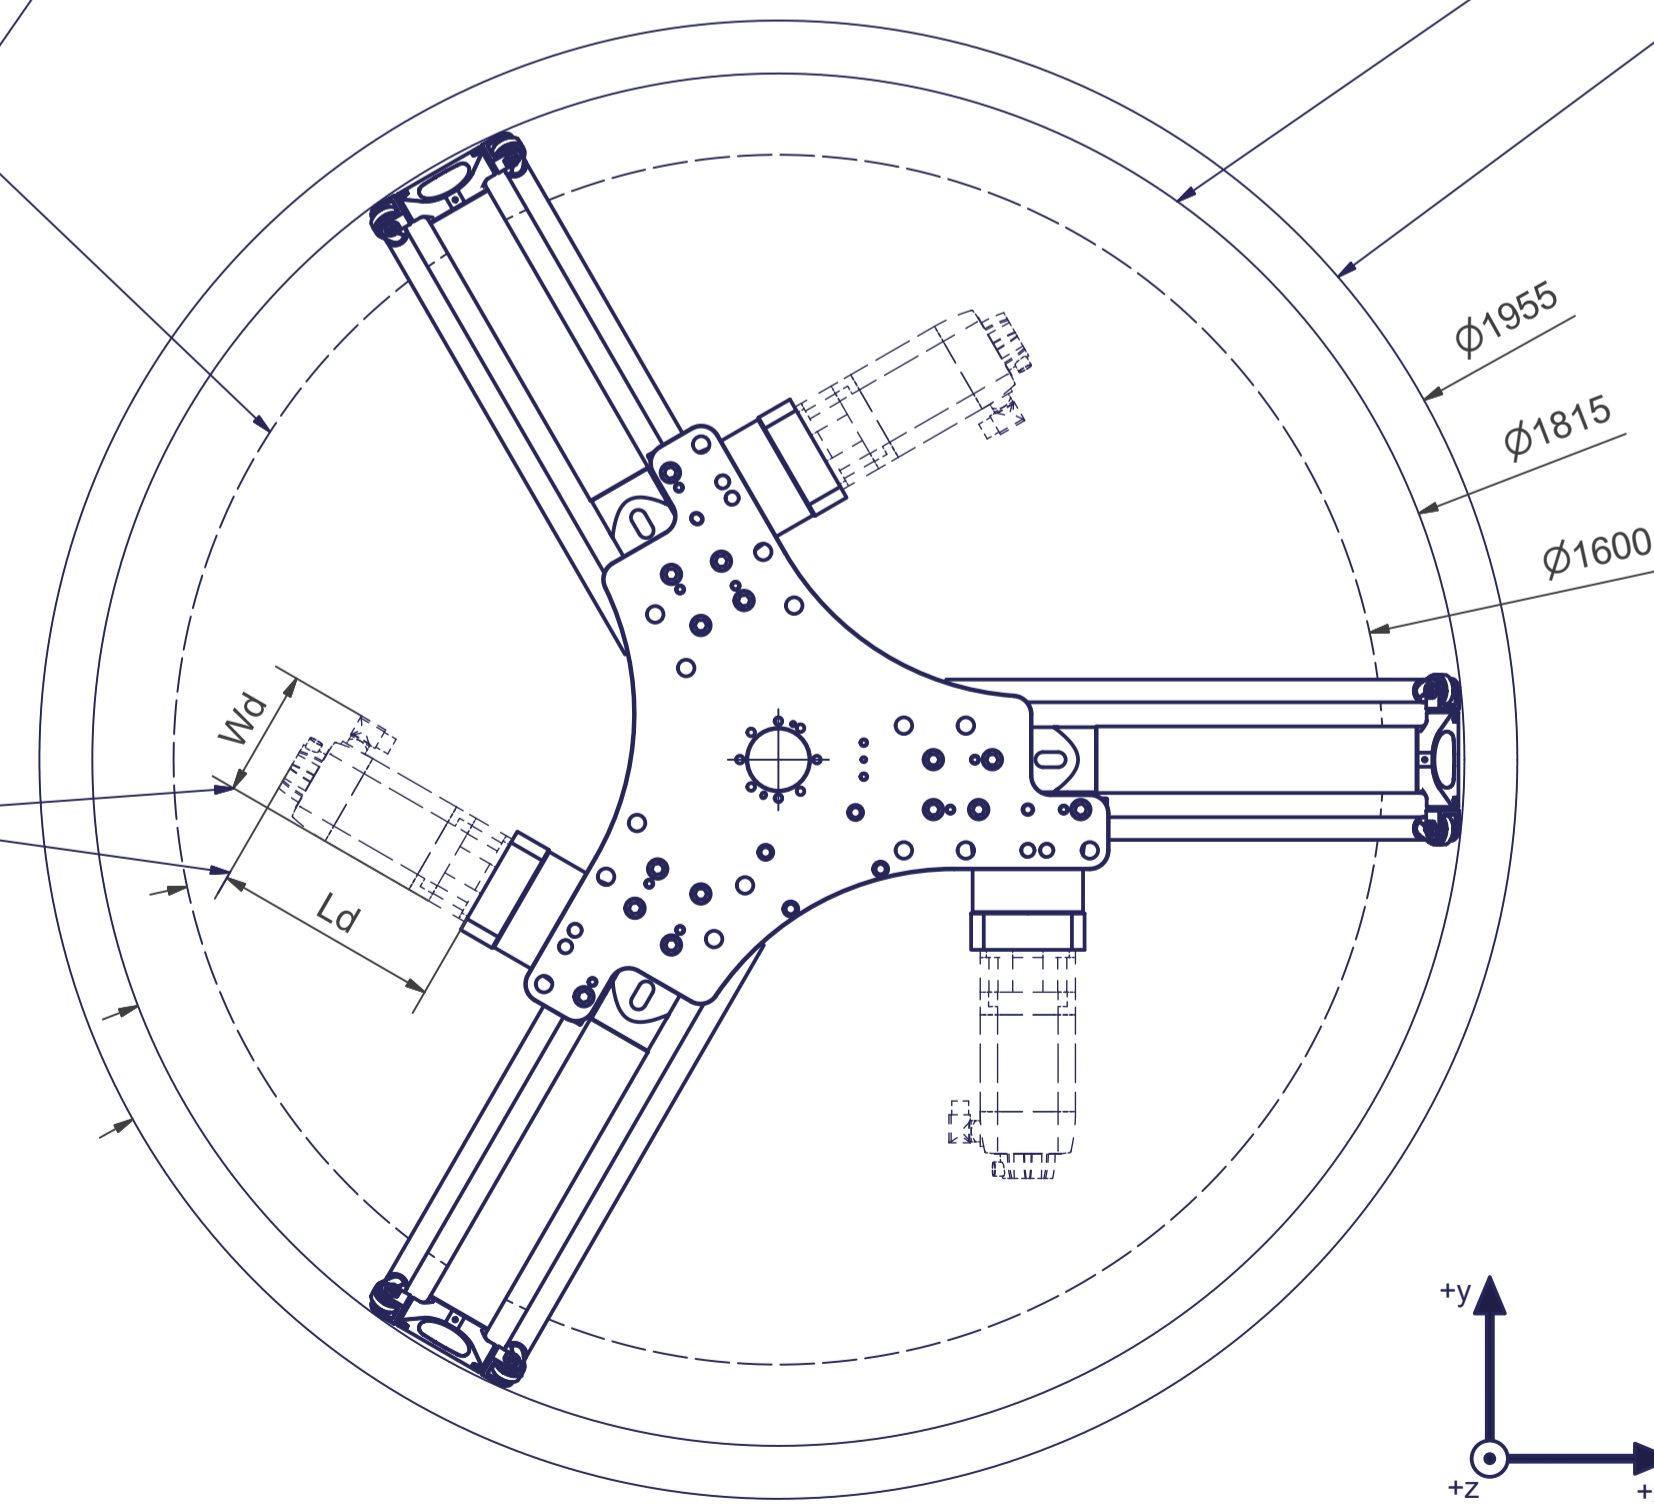


Flange diagram according to
ISO 9409-1-125-6-M10

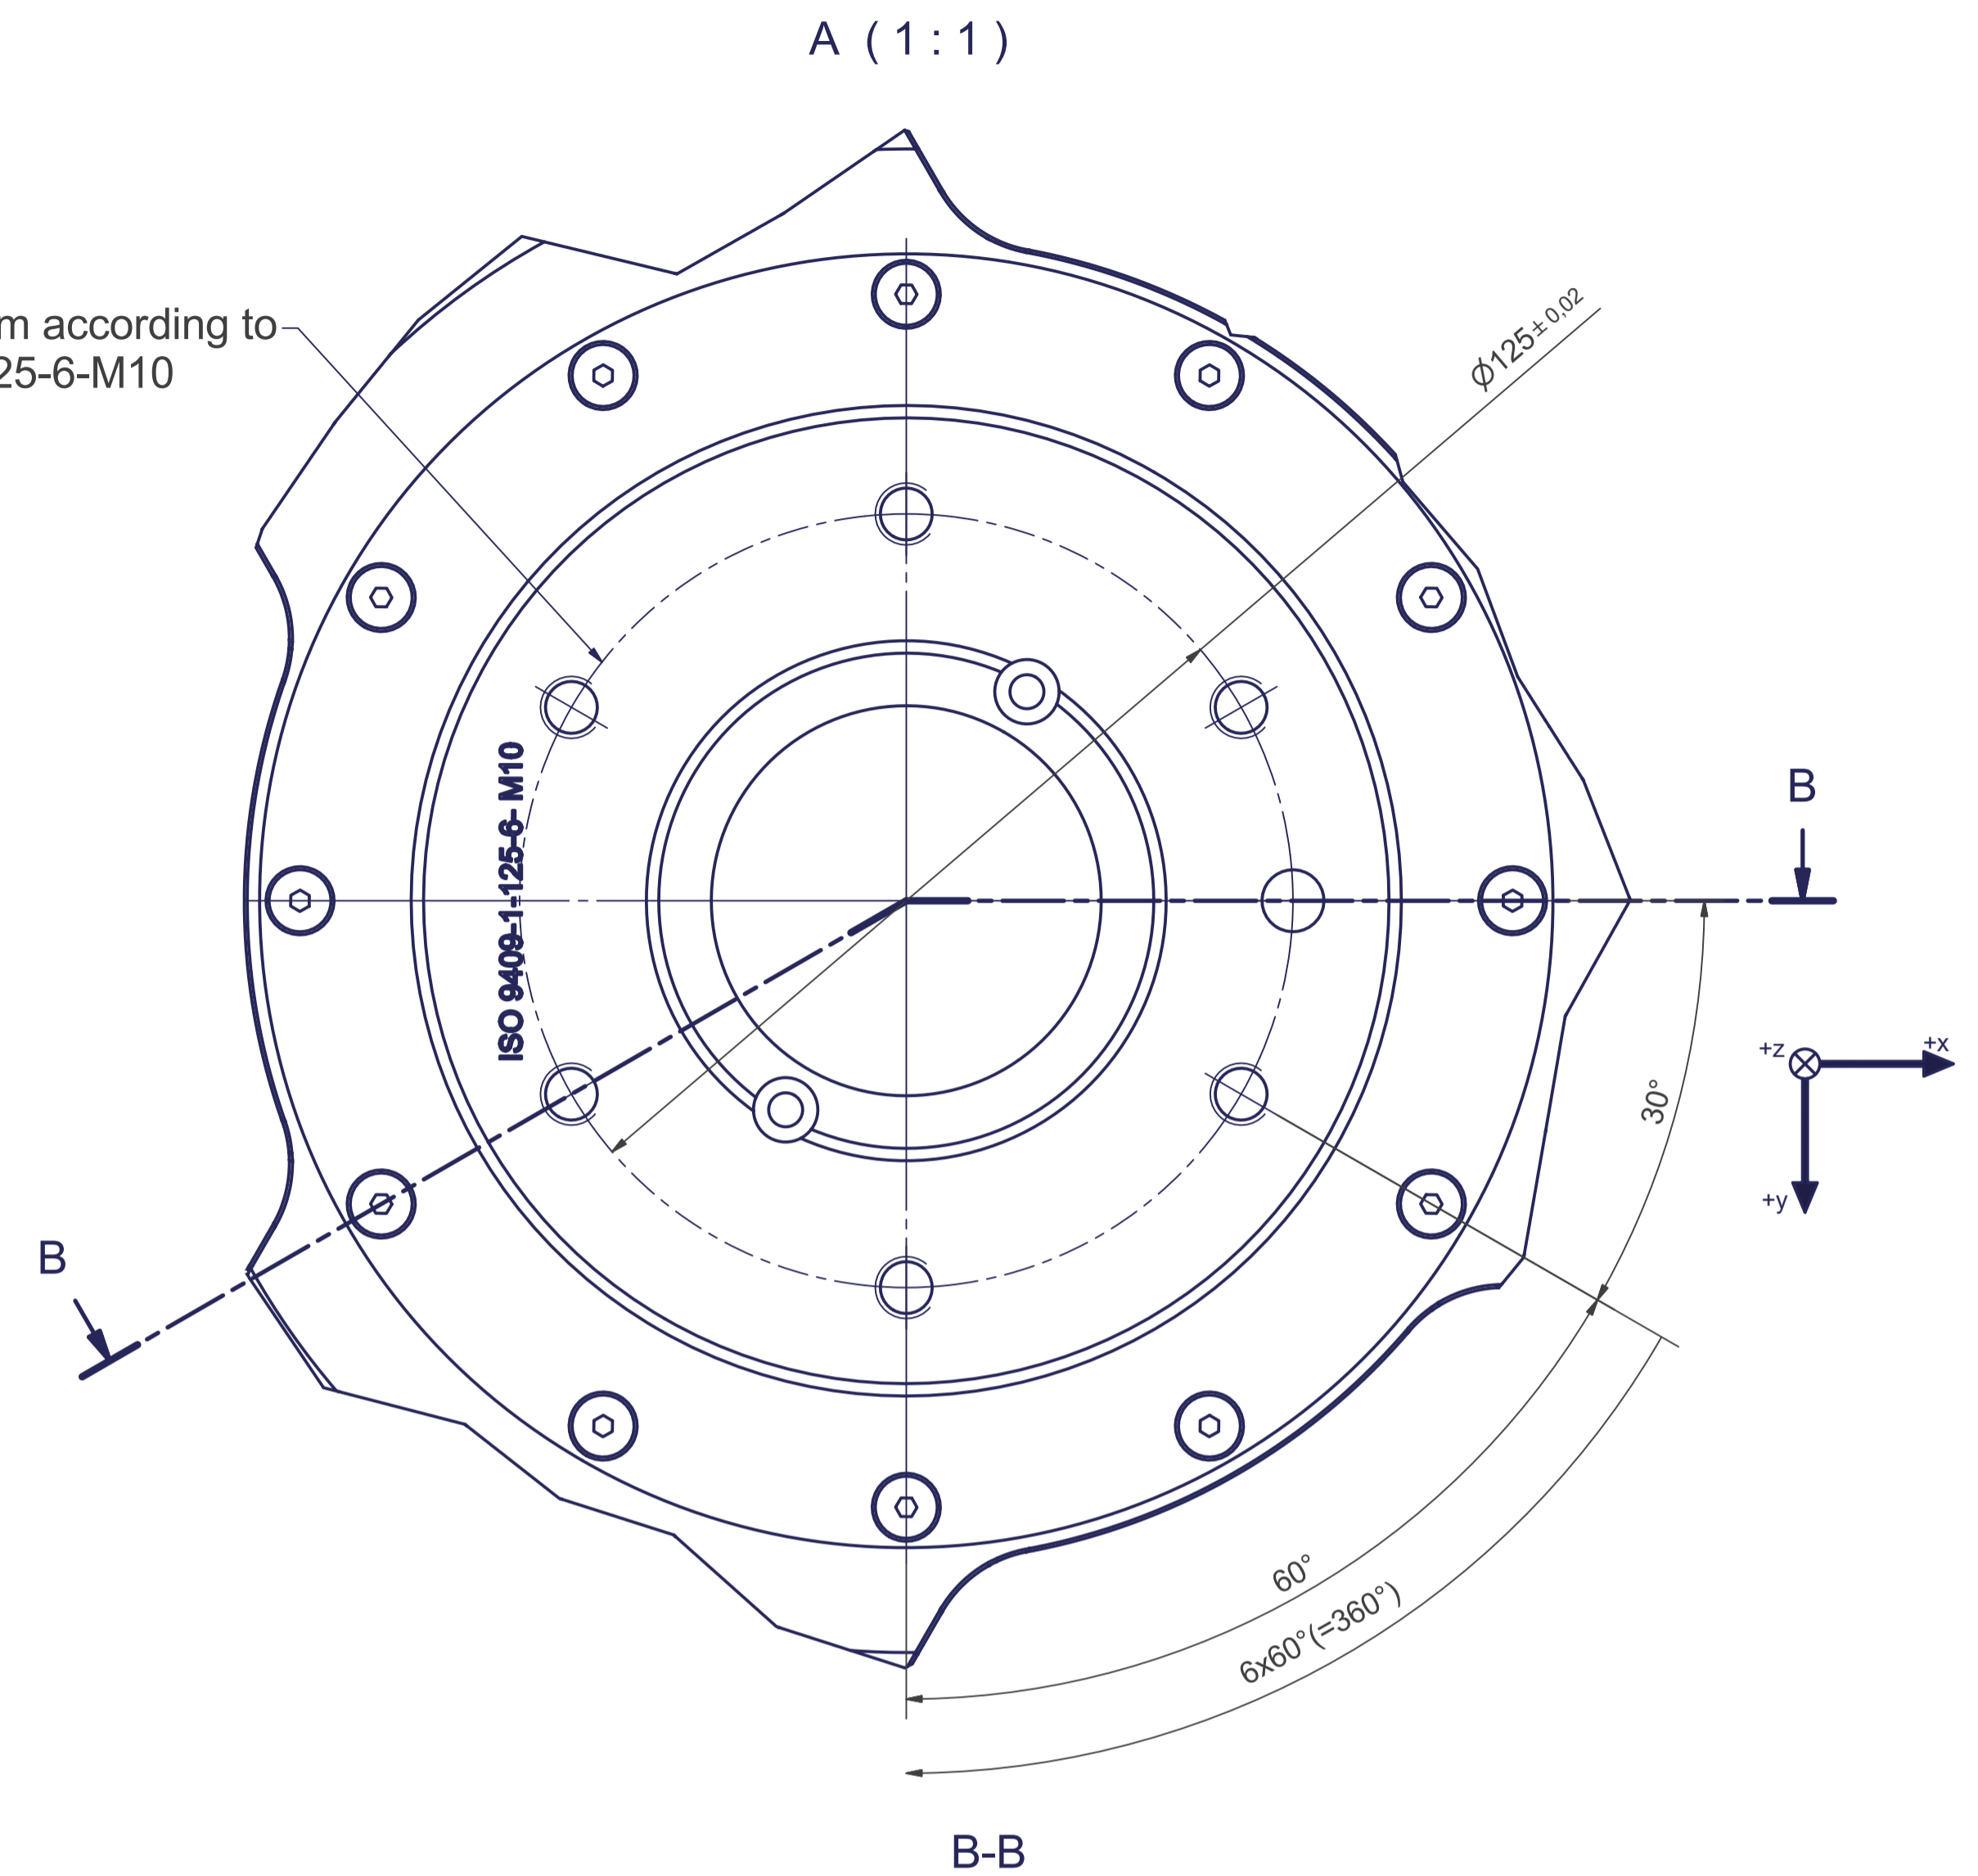


Maximum interference contour

Z (1:2)

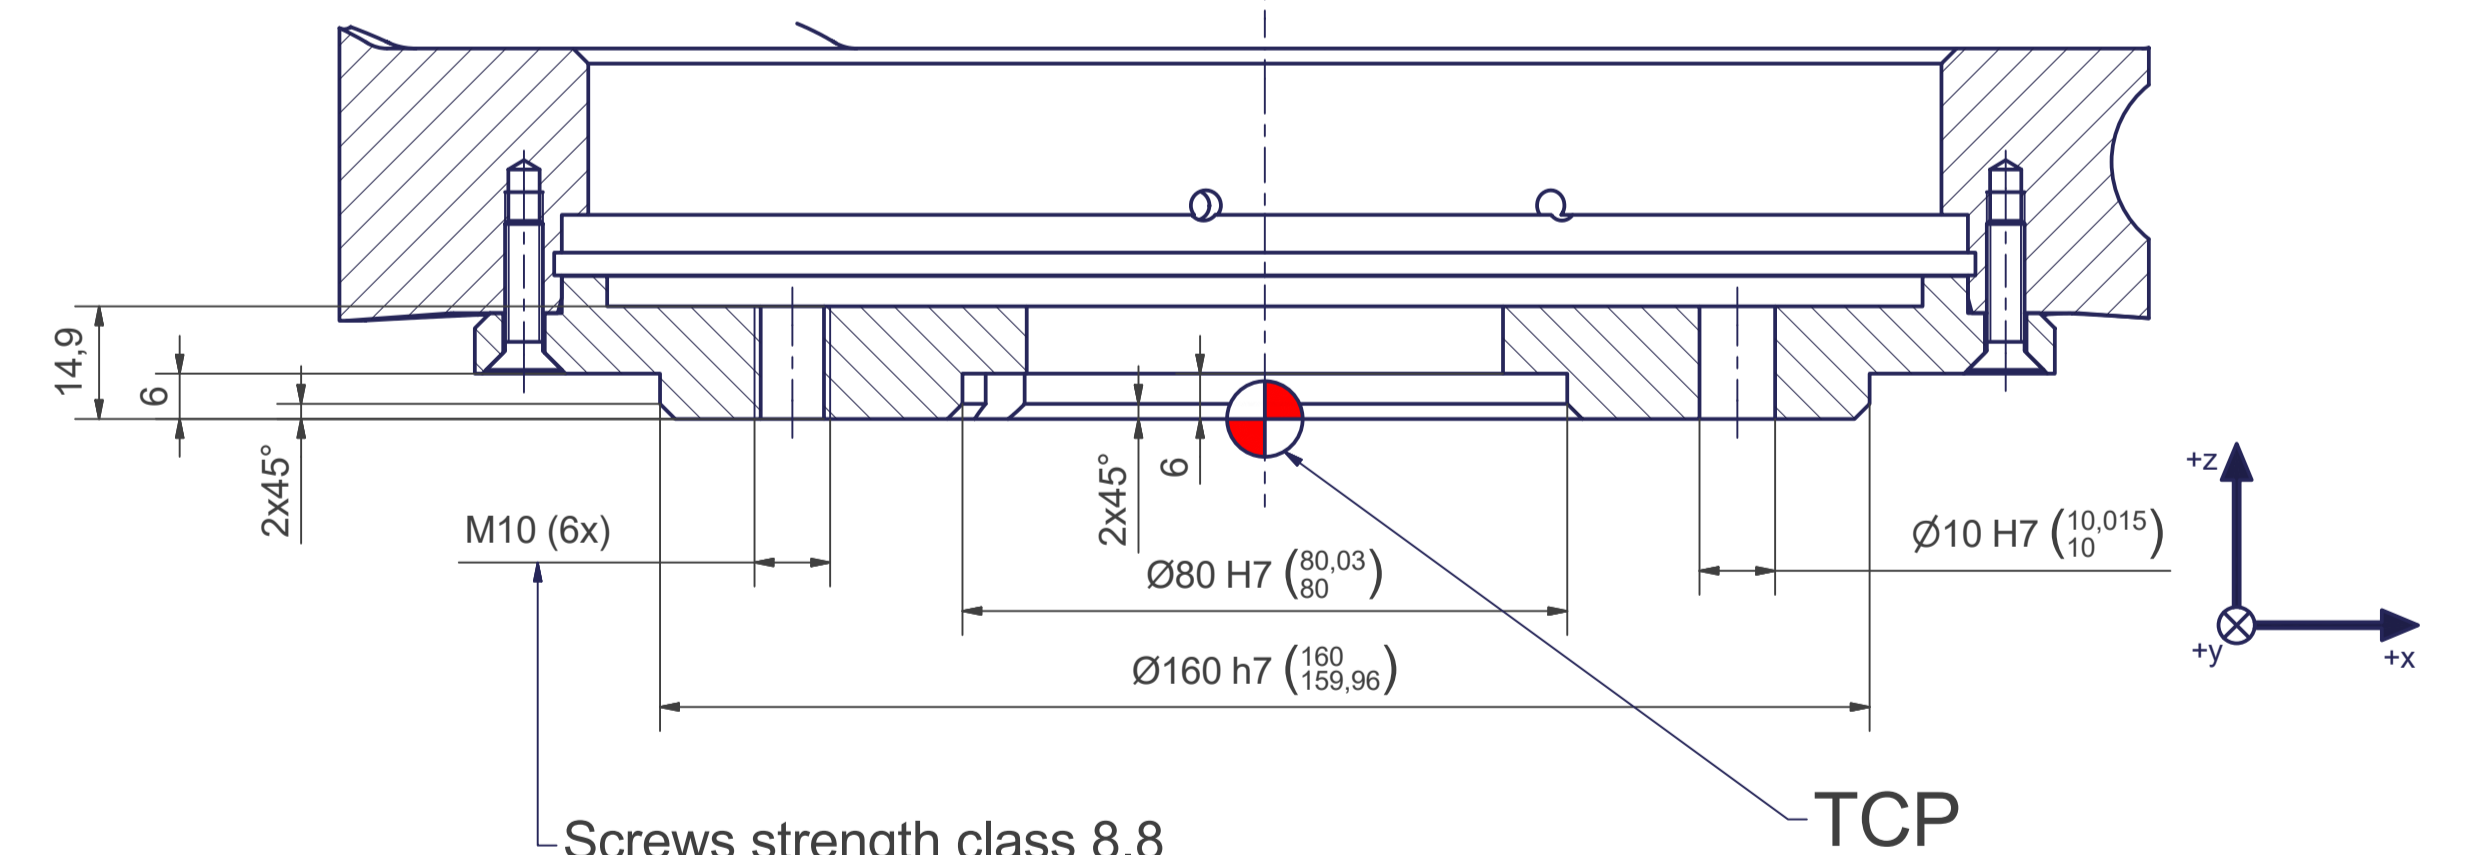


Screws strength class 8.8
Fasten with max. 40 Nm
Do not use bonding agent.

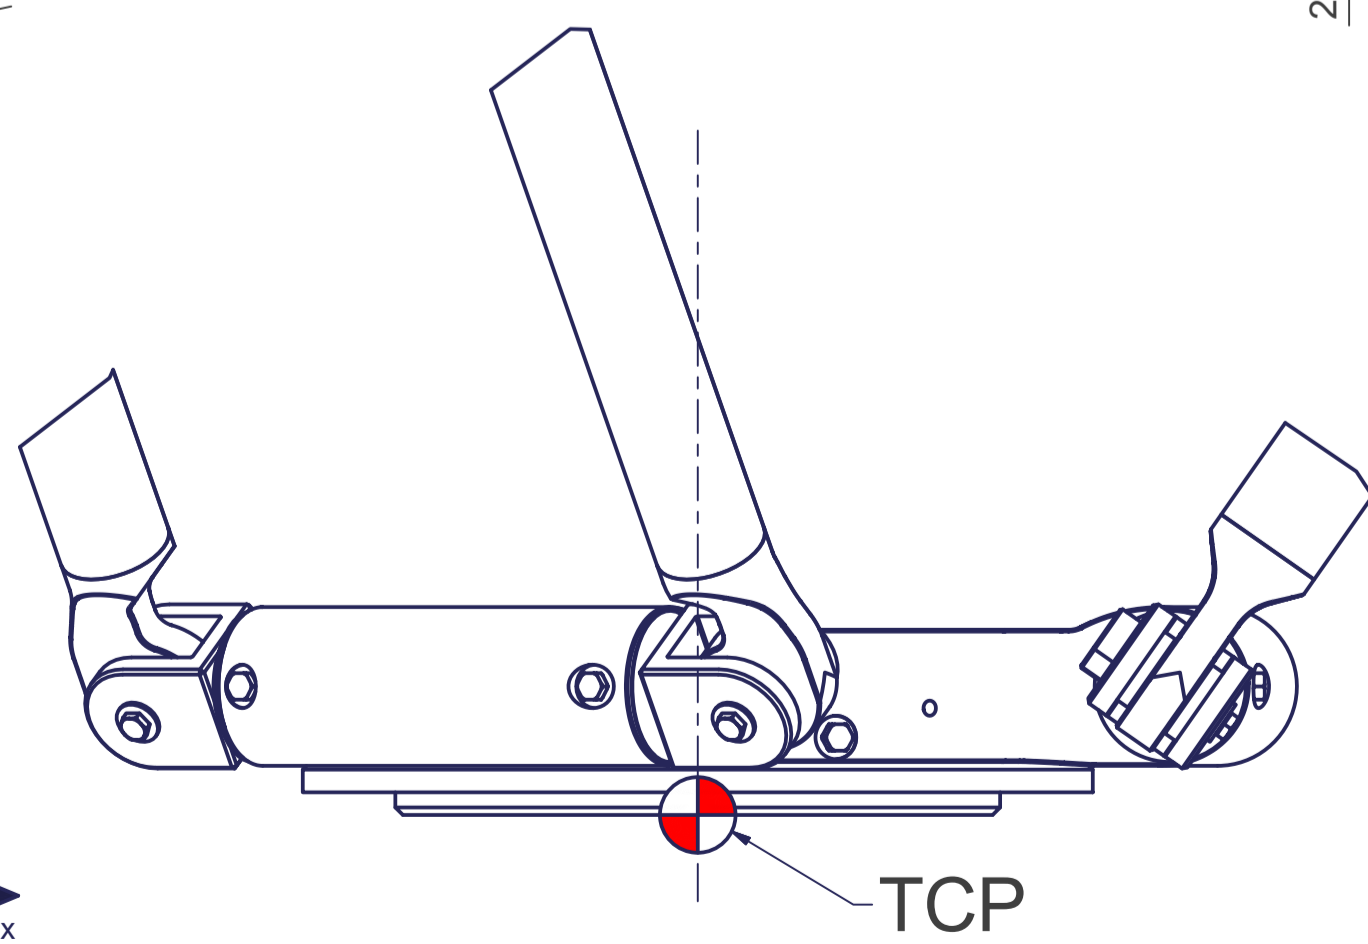

Connecting dimensions,
valid for article number A_00824

m= kg	A	p= bar
proj. storage surface = m²		v= l/min
First angle projection	P= kW	
	U= V / Hz / Ph	
	lmax= A	

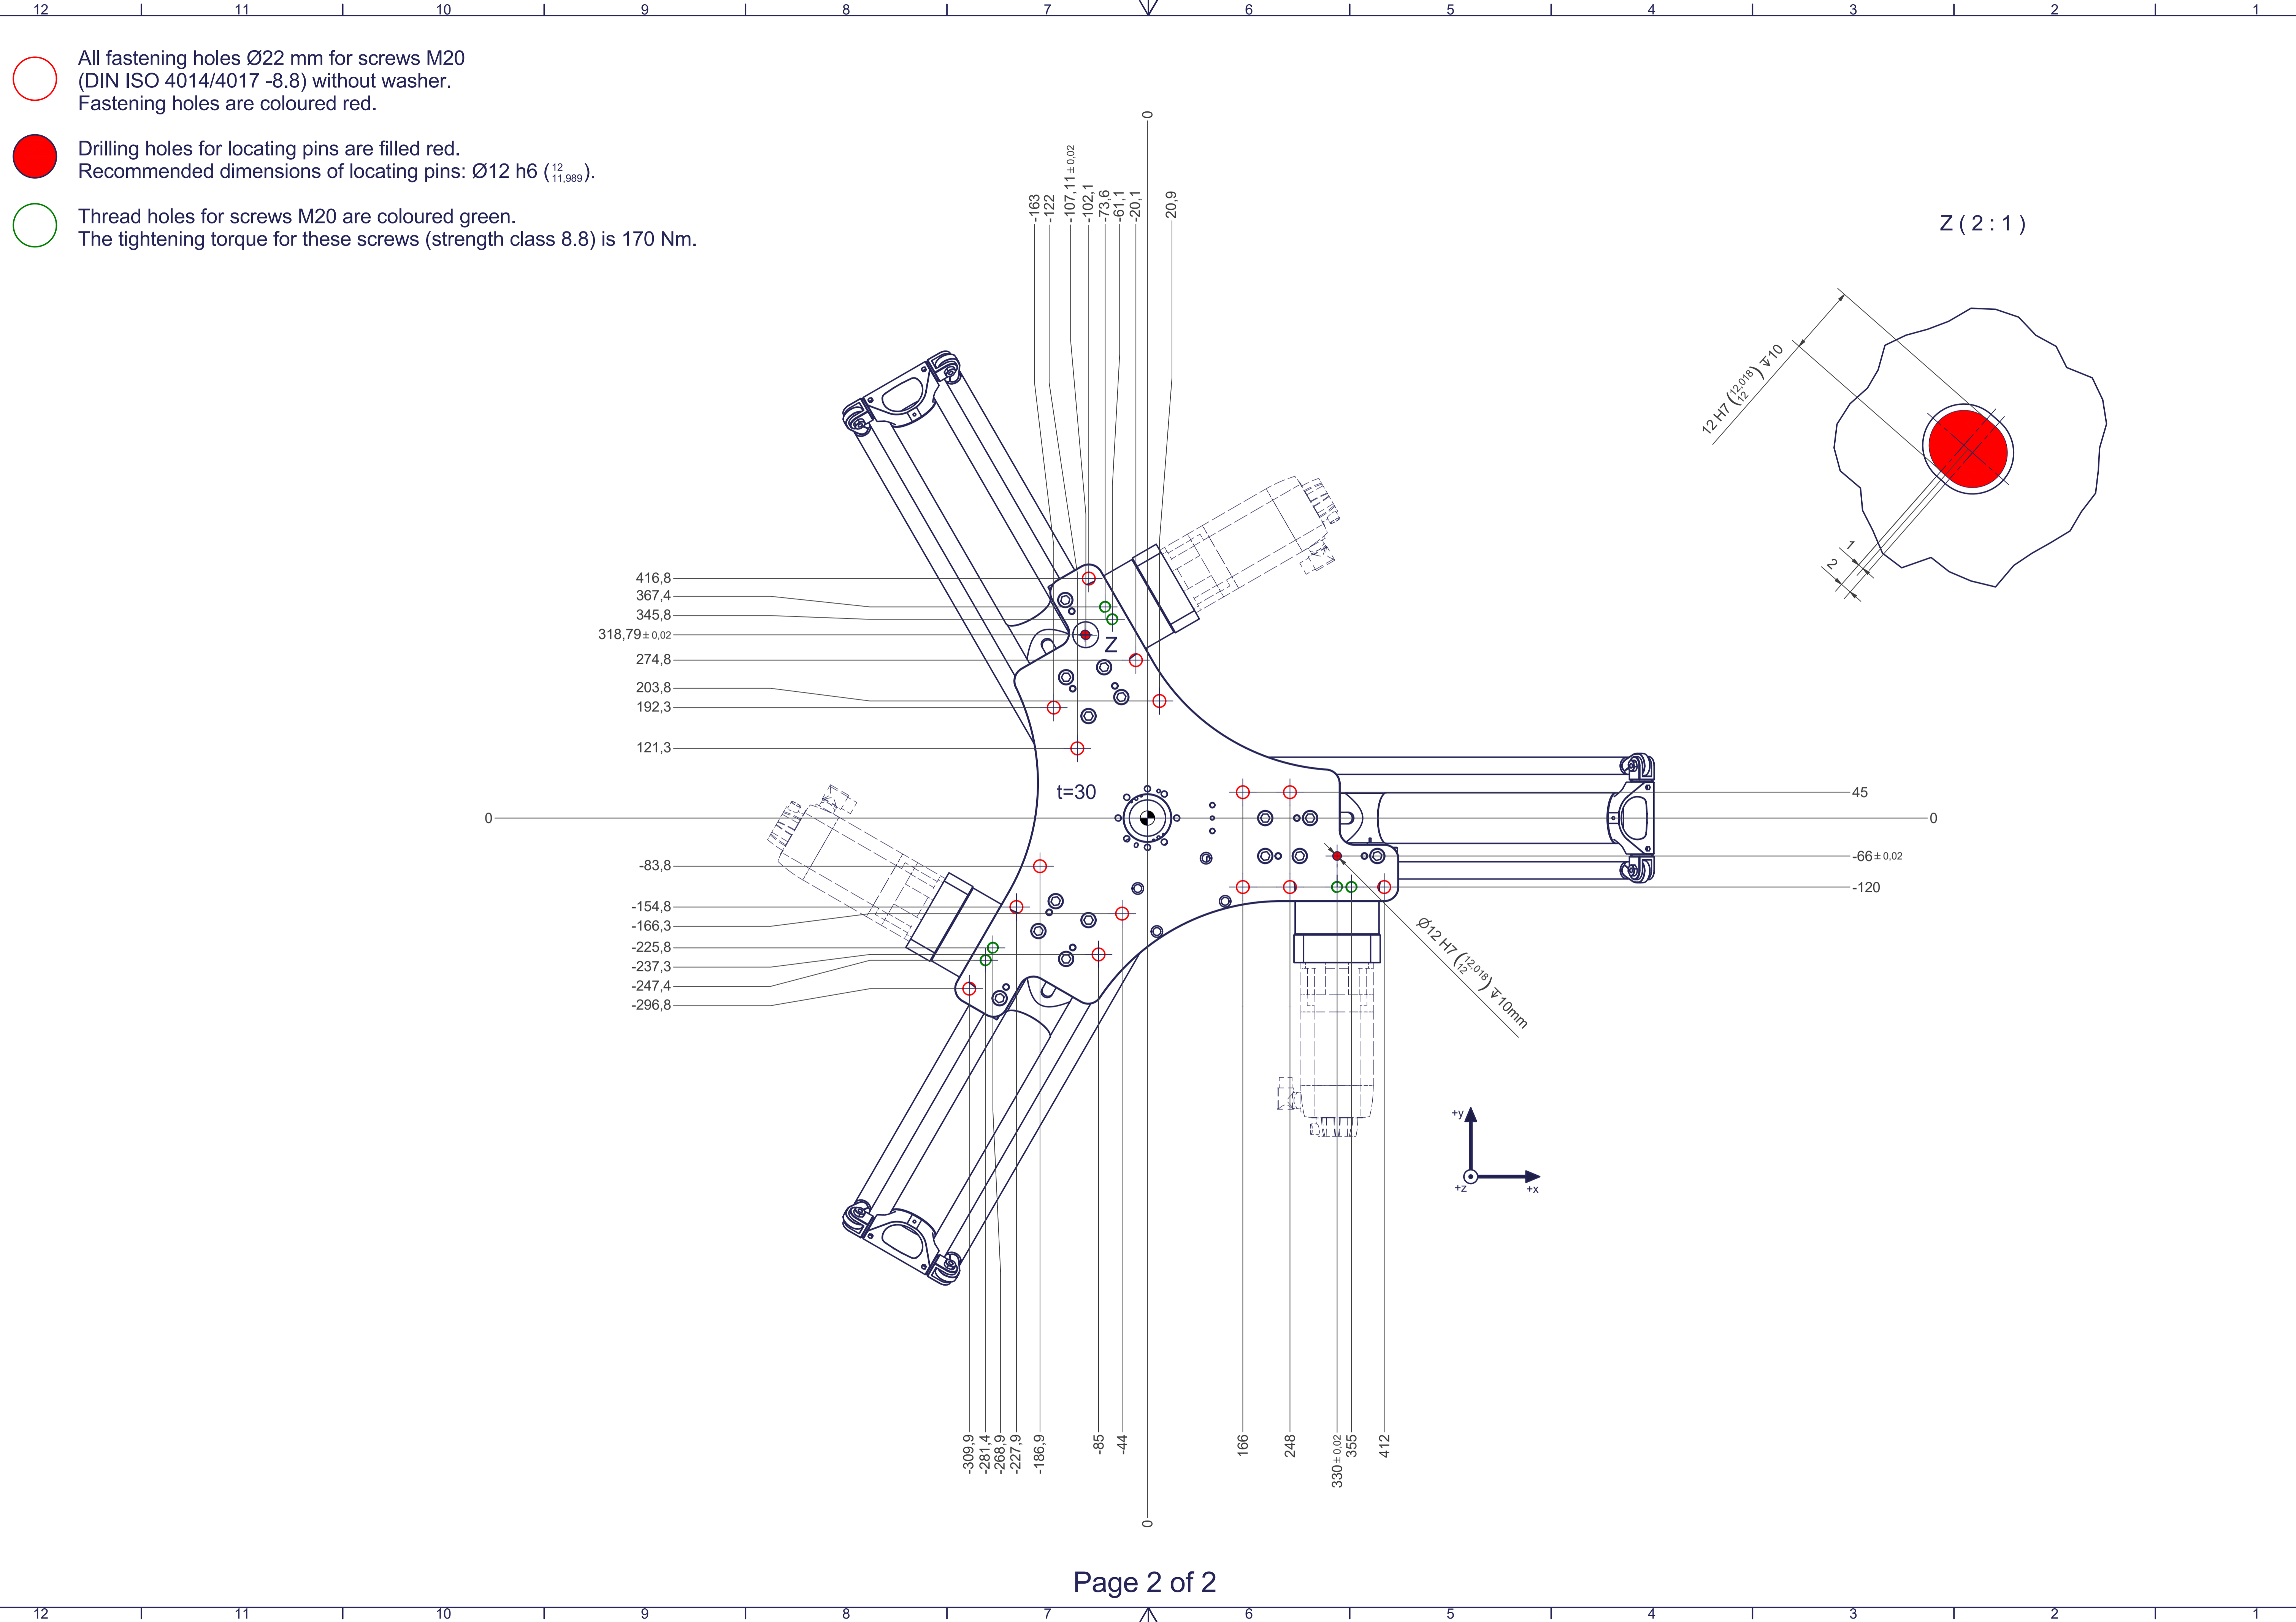

- All fastening holes $\varnothing 22$ mm for screws M20 (DIN ISO 4014/4017 -8.8) without washer. Fastening holes are coloured red.
- Drilling holes for locating pins are filled red. Recommended dimensions of locating pins: $\varnothing 12$ h6 ($\begin{smallmatrix} 12 \\ 11,989 \end{smallmatrix}$).
- Thread holes for screws M20 are coloured green. The tightening torque for these screws (strength class 8.8) is 170 Nm.

