


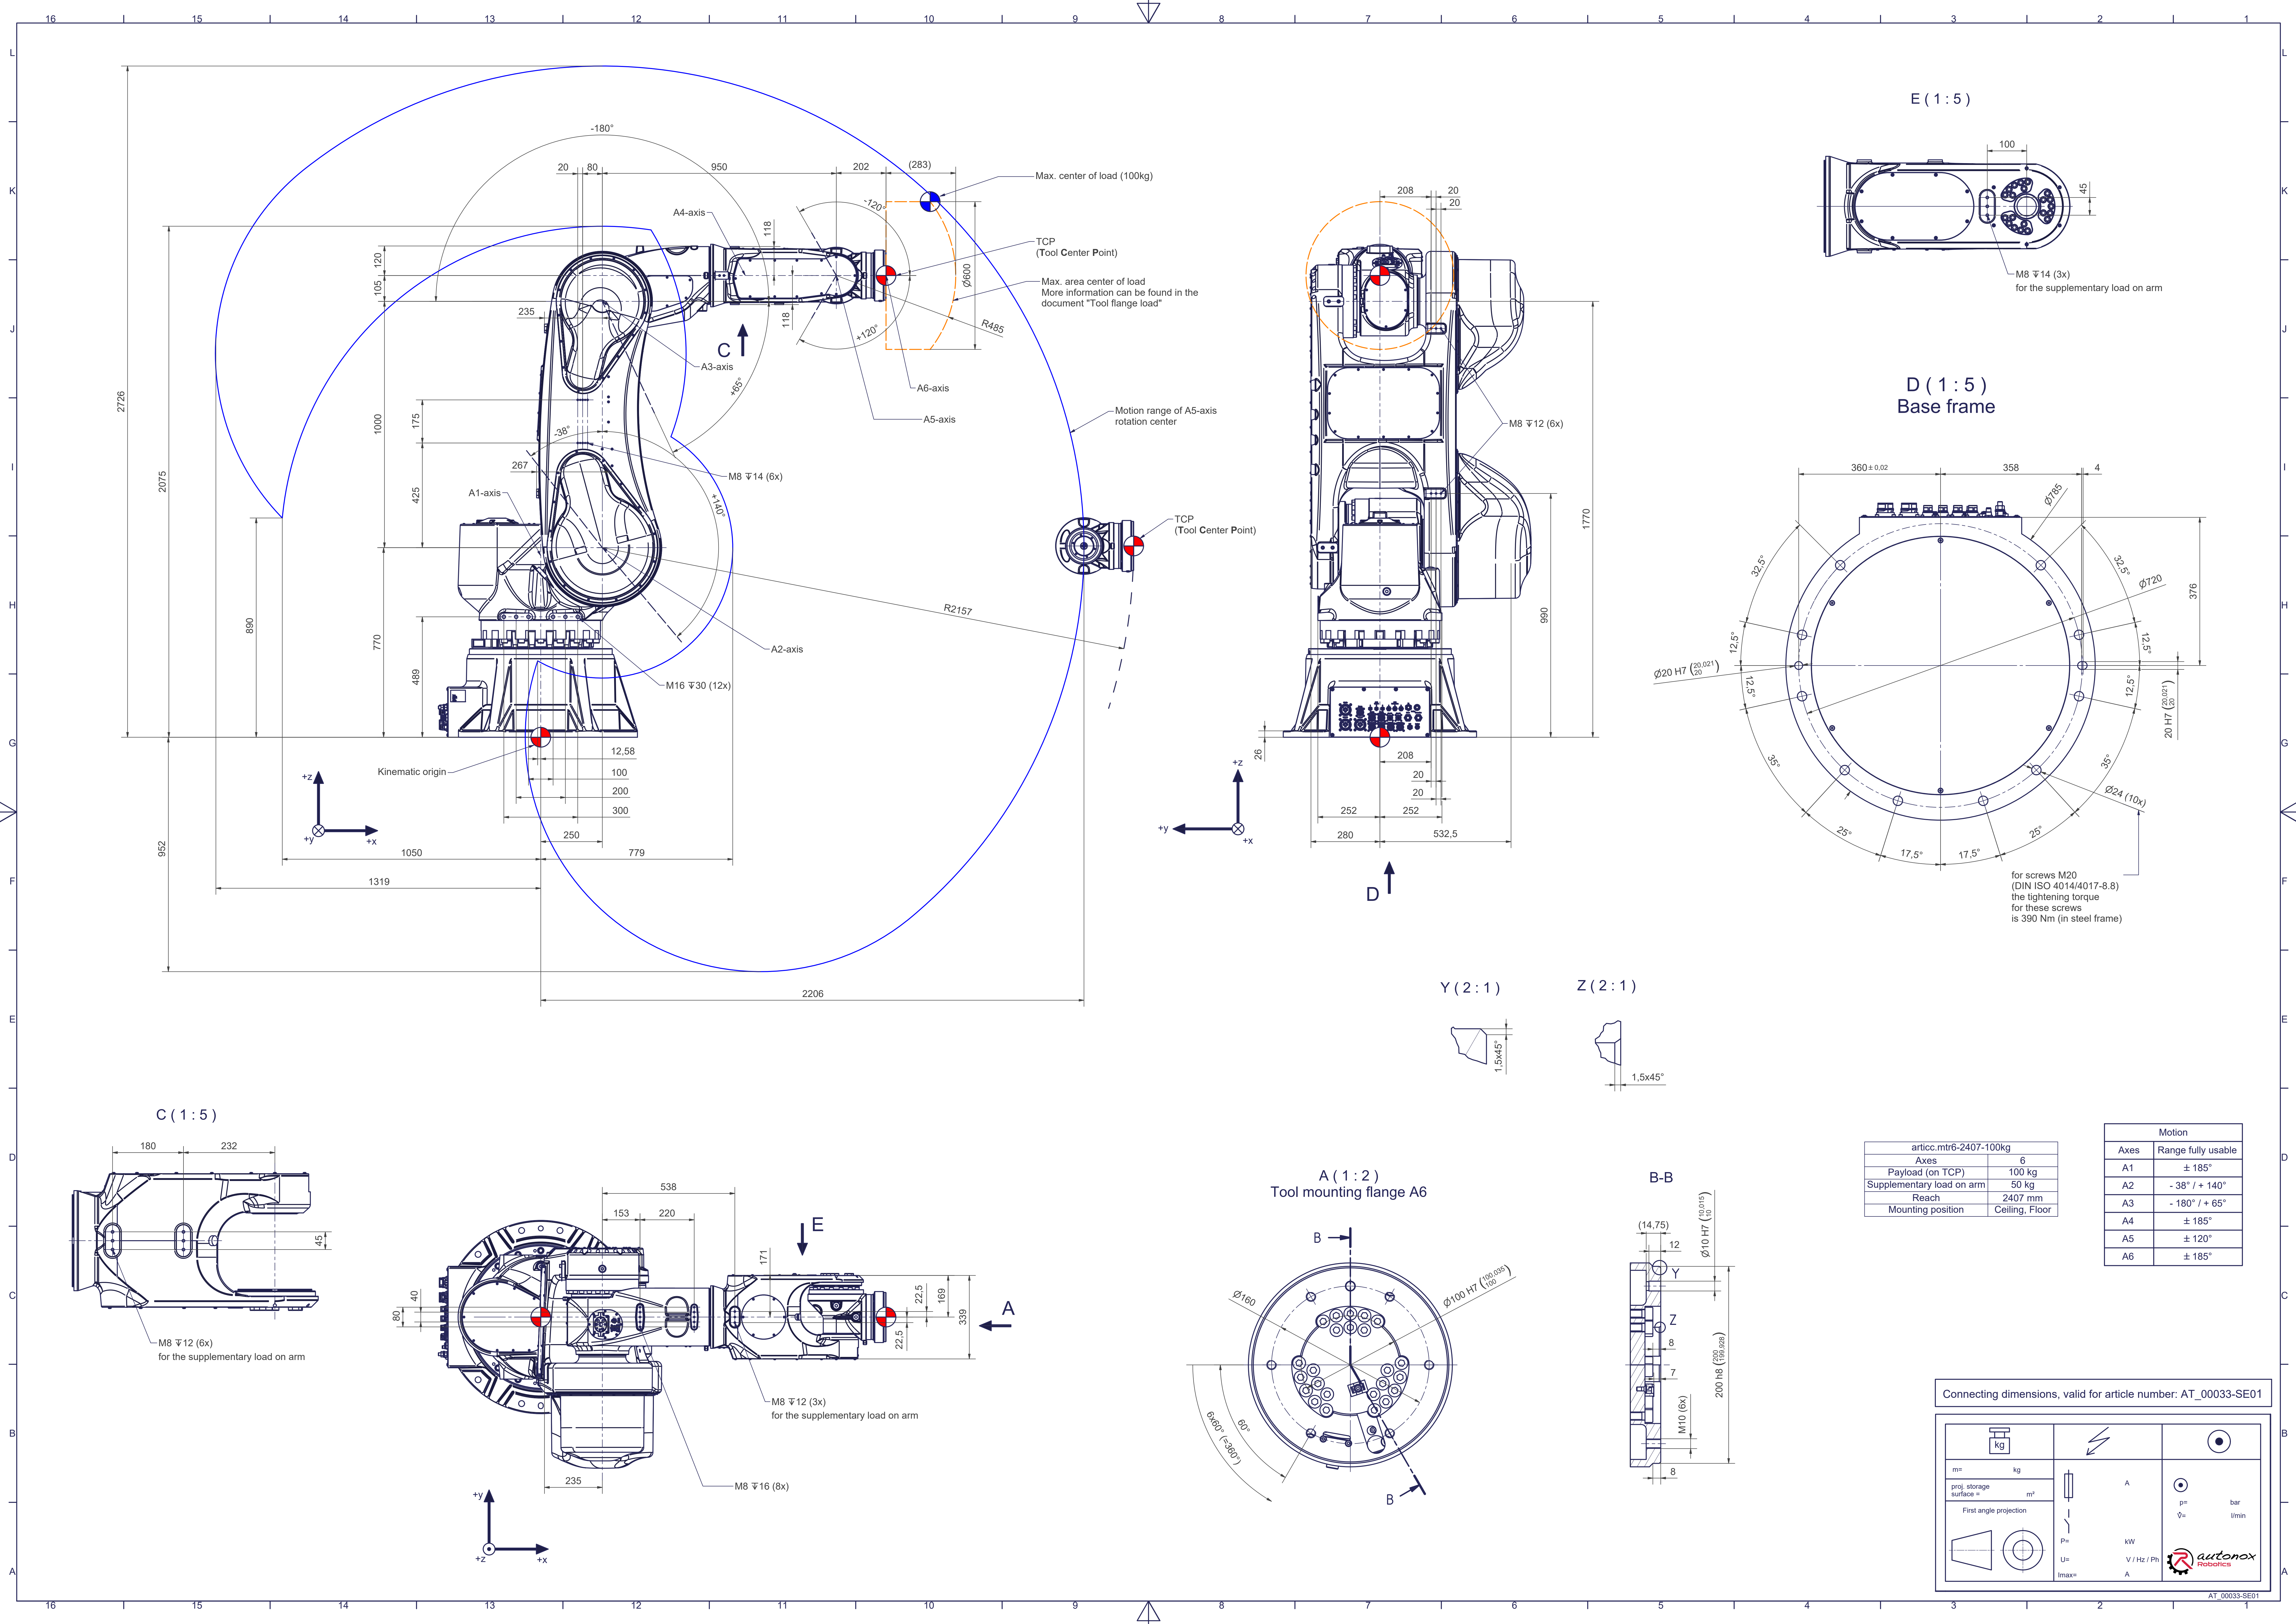

articc.mtr6-2407-100kg	
Axes	6
Payload (on TCP)	100 kg
Supplementary load on arm	50 kg
Reach	2407 mm
Mounting position	Ceiling, Floor

Motion	
Axes	Range fully usable
A1	± 185°
A2	- 38° / + 140°
A3	- 180° / + 65°
A4	± 185°
A5	± 120°
A6	± 185°

Connecting dimensions, valid for article number: AT_00033-SE01

kg		A		p= bar l/min	
m=	kg	A		p= bar l/min	
proj. storage surface =	m²	A		p= bar l/min	
First angle projection		A		p= bar l/min	
U=		A		p= bar l/min	
Imax=		A		p= bar l/min	



AT_00033-SE01