
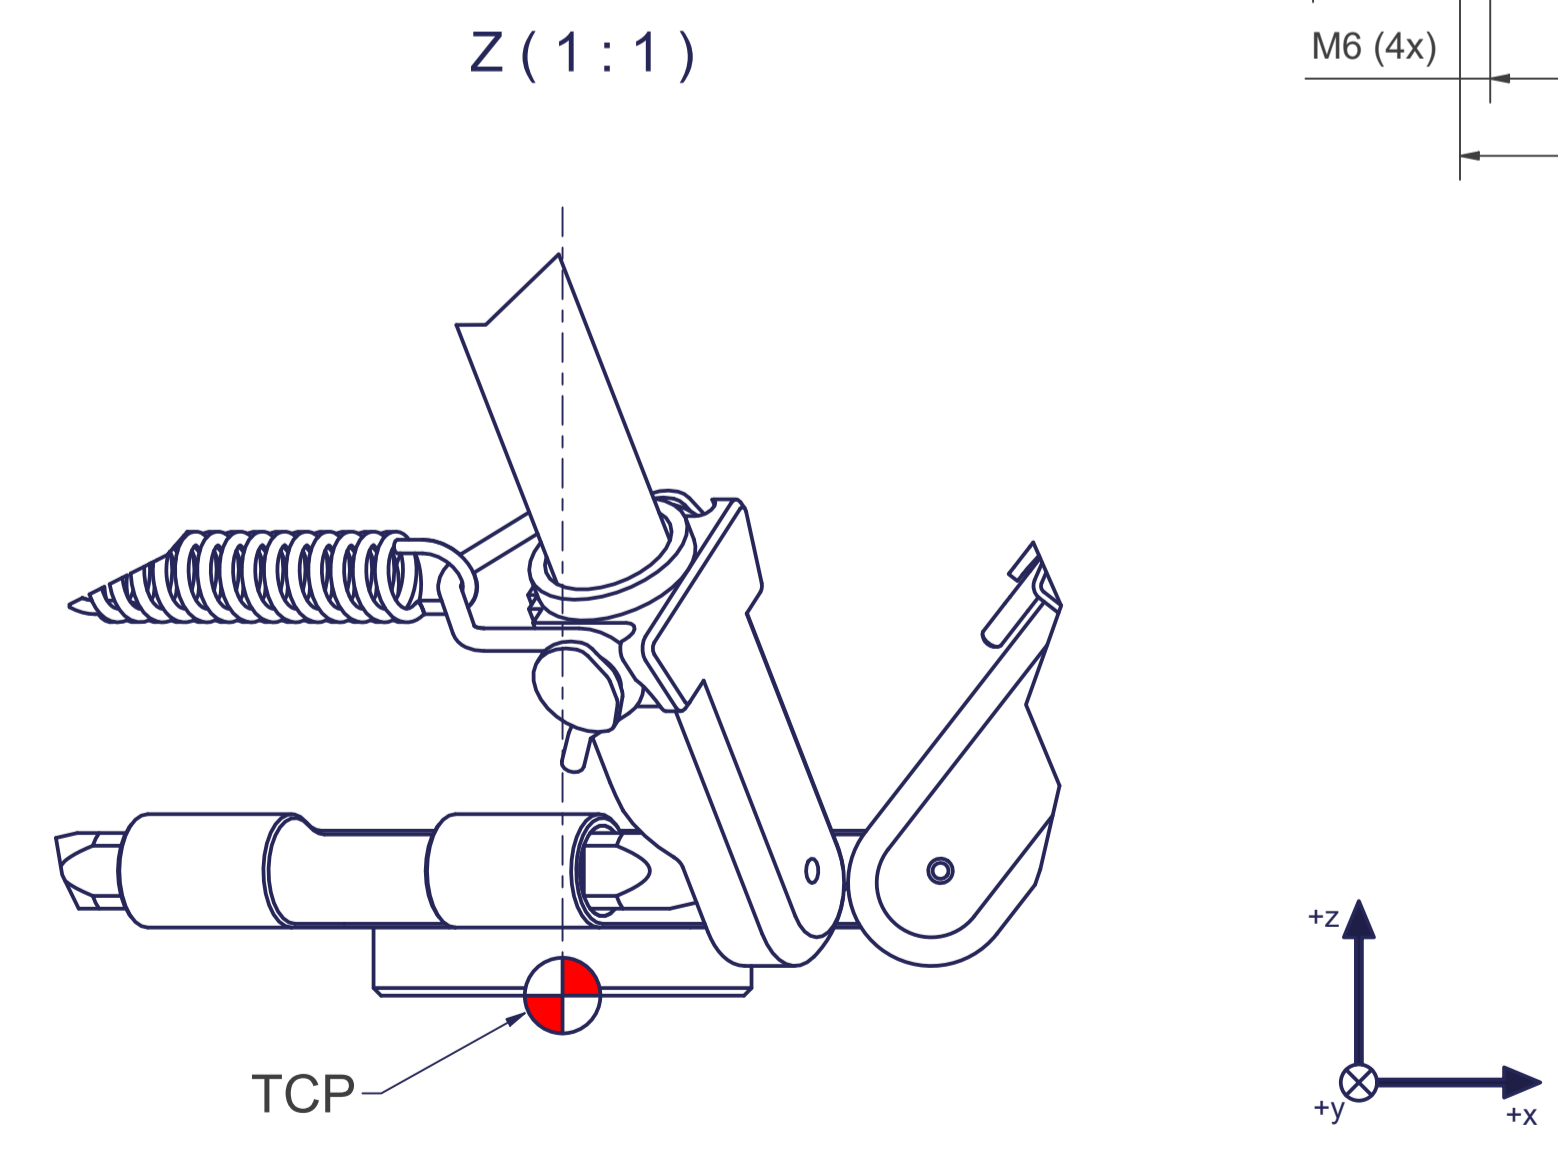
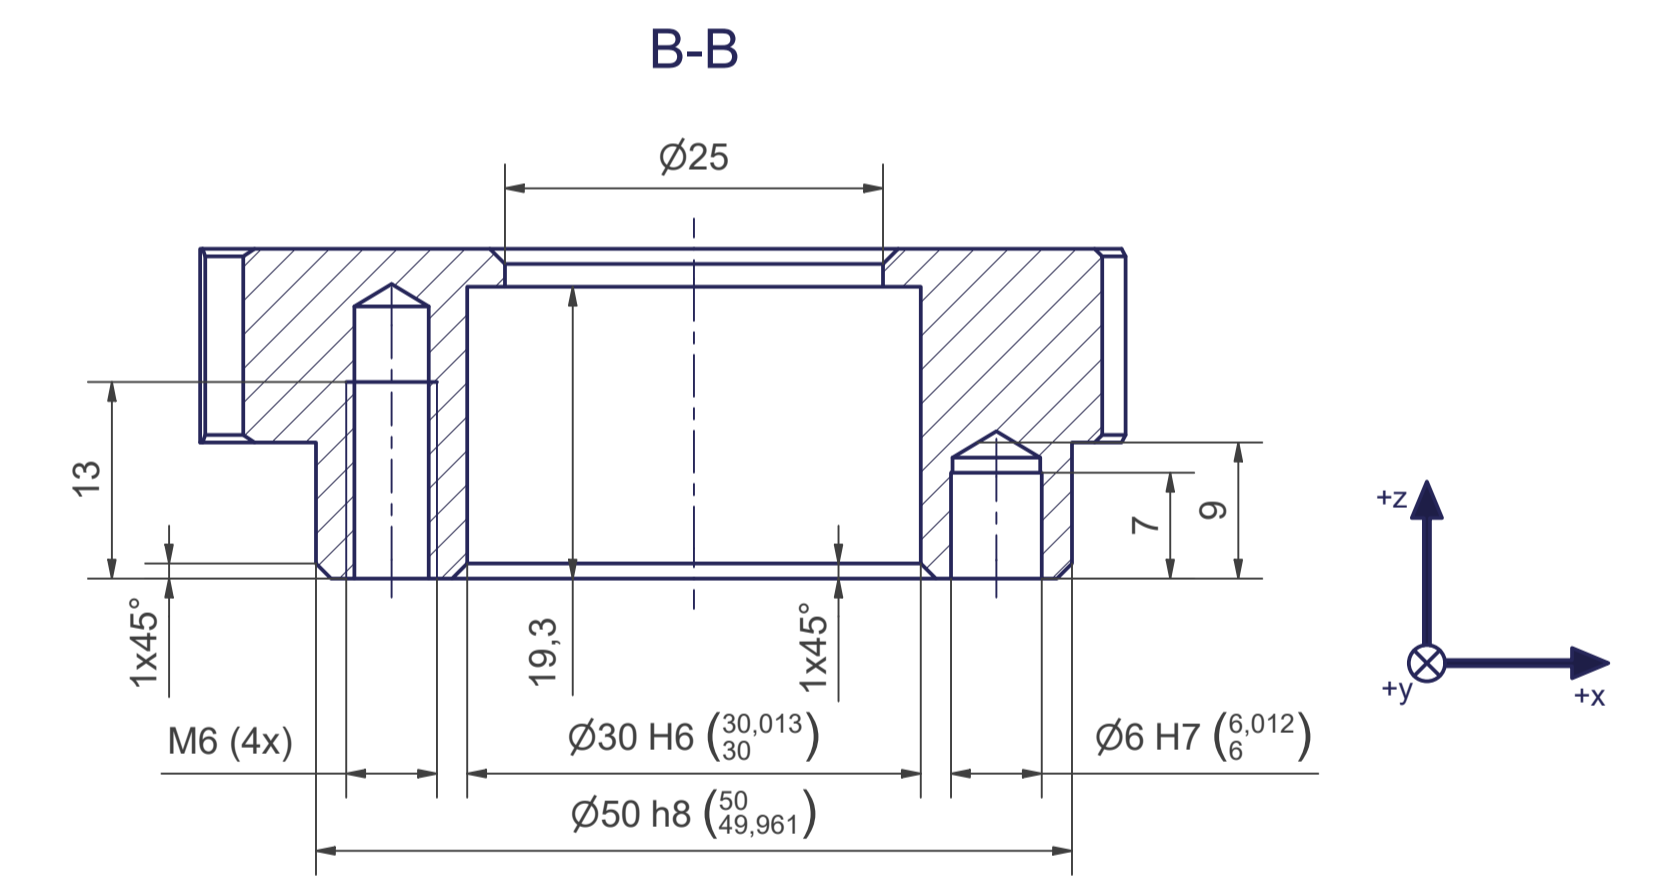


Tool Center Point
TCP (on the plane of the flange)

TCP - working range

Interference contour
from machine body

Maximum interference
contour

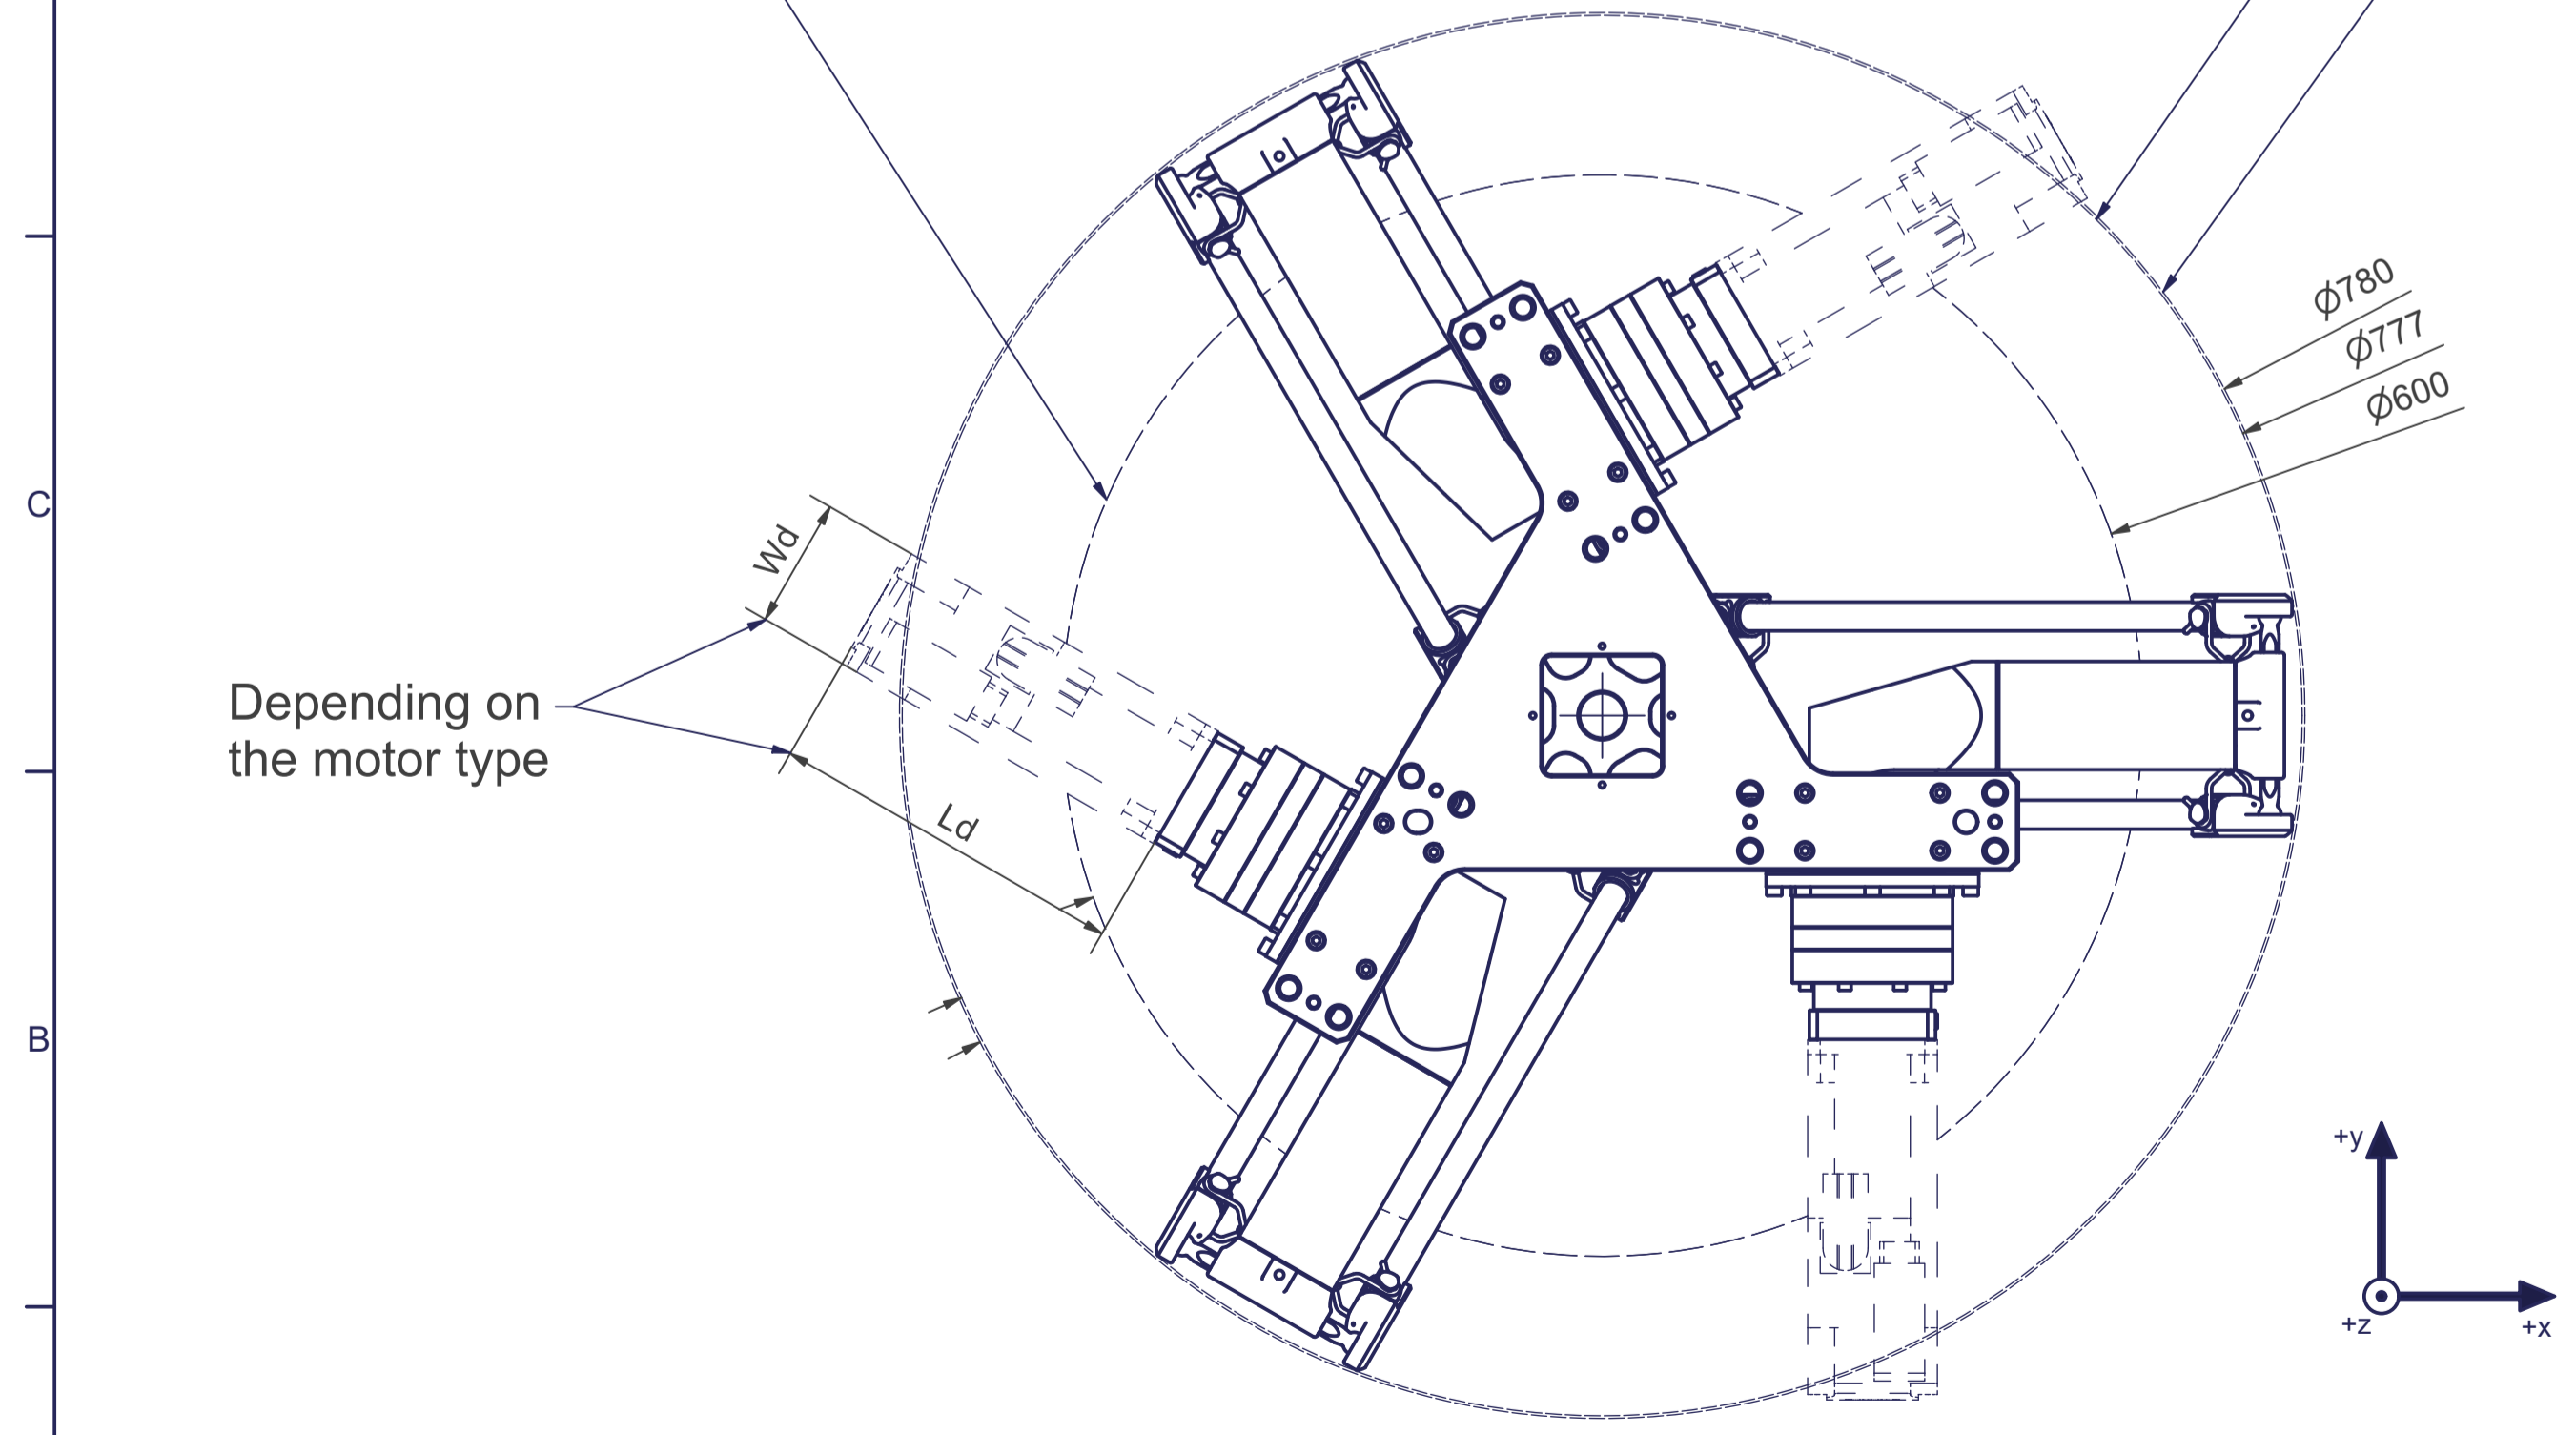

m= kg	A	p= bar
proj. storage surface = m²		v̇= l/min
First angle projection	P= kW	
	U= V / Hz / Ph	
	Imax= A	

Connecting dimensions,
valid for article number AL_00001

12

11

10

9

8

7

6


5

4




3

2

1

 Thread holes for screws M12 are coloured green.
The tightening torque for these screws (strength class 8.8) is 41 Nm.

 Drilling holes for location pins are filled red.
Recommended dimensions for locating pins: $\text{Ø}12 \text{ h}8 \left(\begin{smallmatrix} 12 \\ 11,973 \end{smallmatrix} \right)$

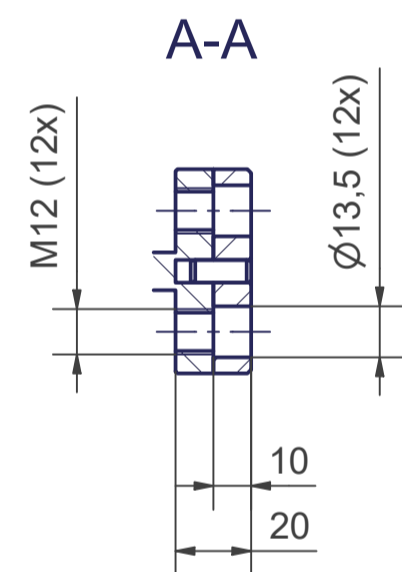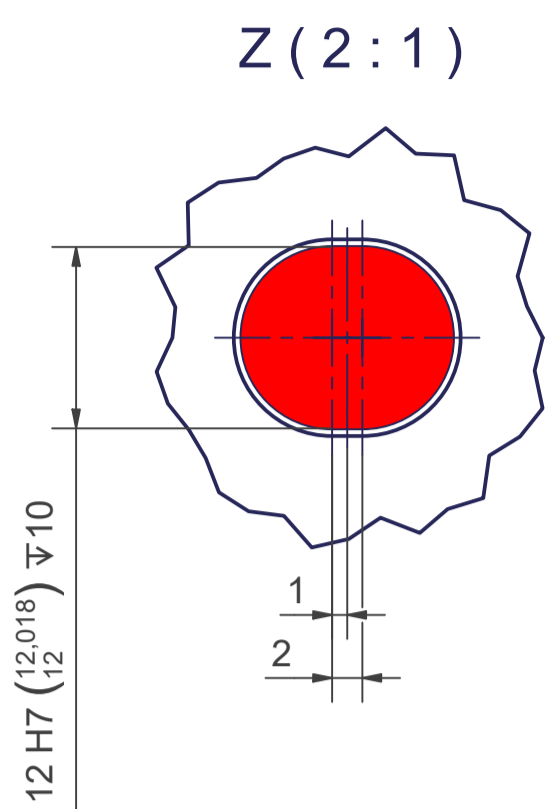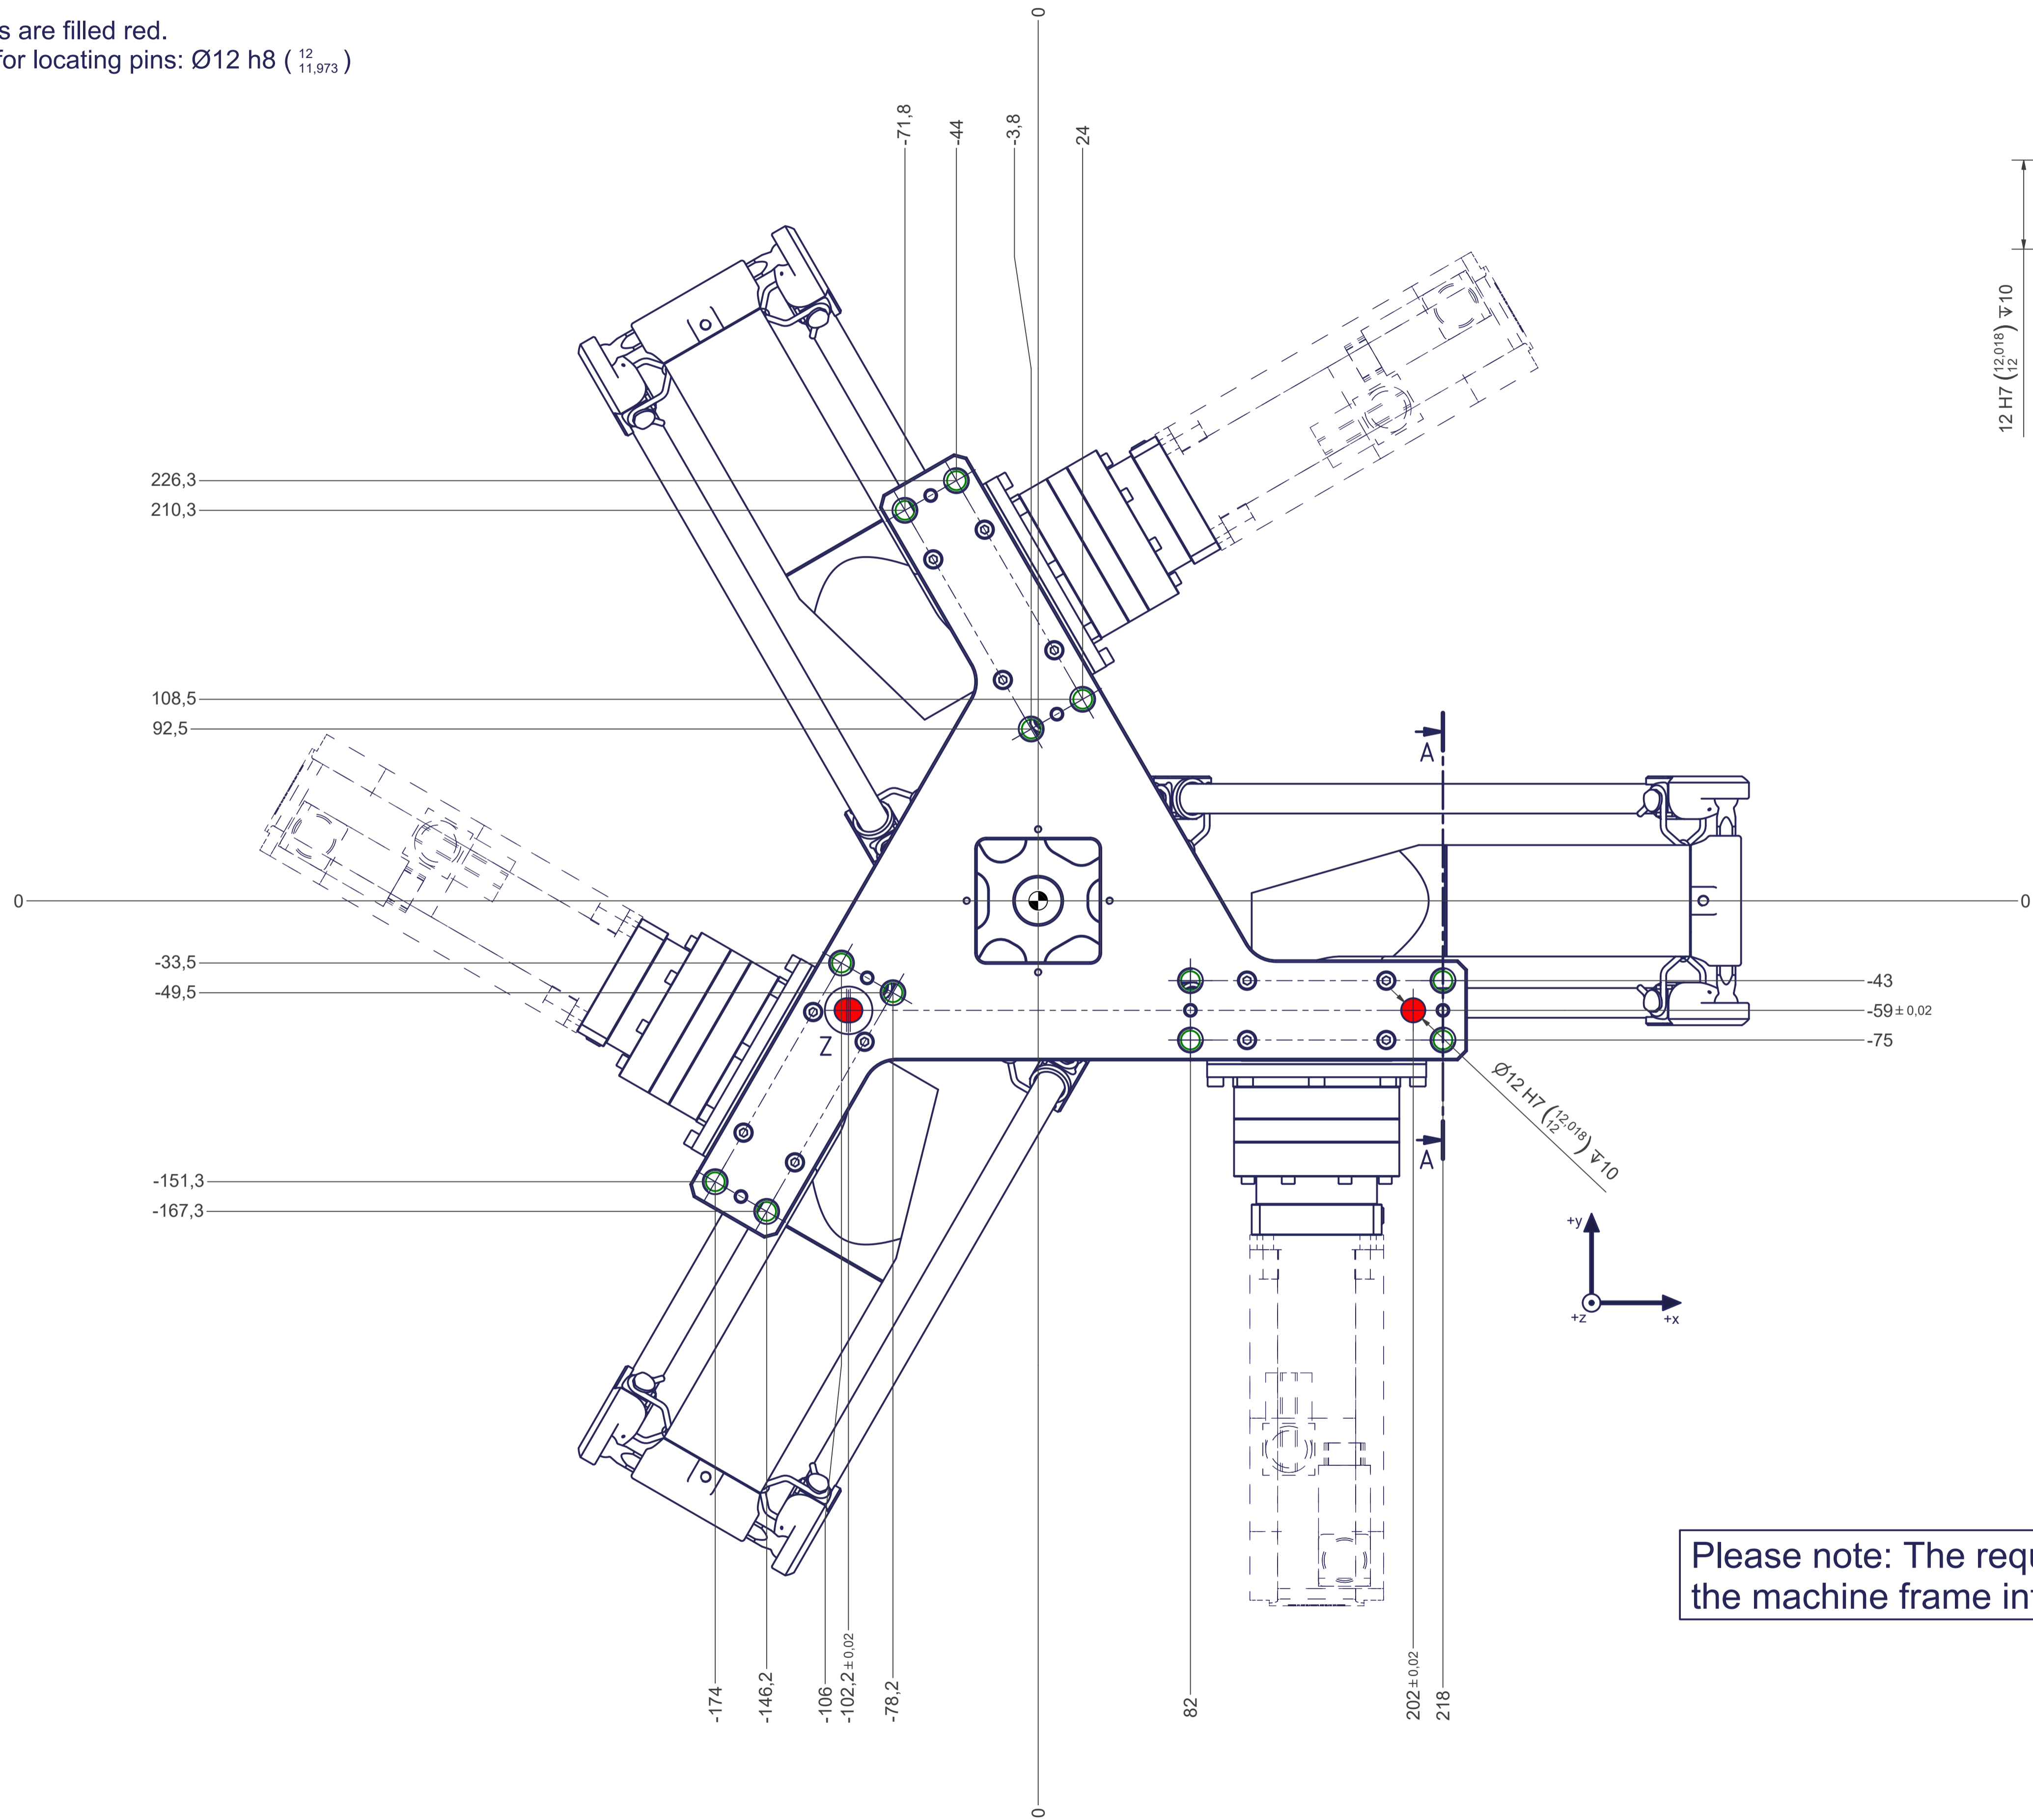

Please note: The required flatness of the machine frame interface is 0,1mm.

12

11

10

9

8

7

6

5

4

3

2

1