

Product data sheet https://autonoxfinder.com/en/A_00713-FO

Date of download: Oct 30, 2025 Time of download: 12:46 UTC

HHD DELTA RL4-1600-6kg

Article number: A_00713-FO

Lubricant variant: Food-grade lubricants (FO)




Description:

This type of robot is based on the principle of parallel kinematics. All drives are mounted in a fixed position on the robot head. Motor cables are not moved. The robot has three (3) translational and one (1) rotational degree(s) of freedom.

Scope of delivery:

Robot mechanics incl. gearbox, Servo motor adapter, Transport and packing instructions

Connecting dimensions:

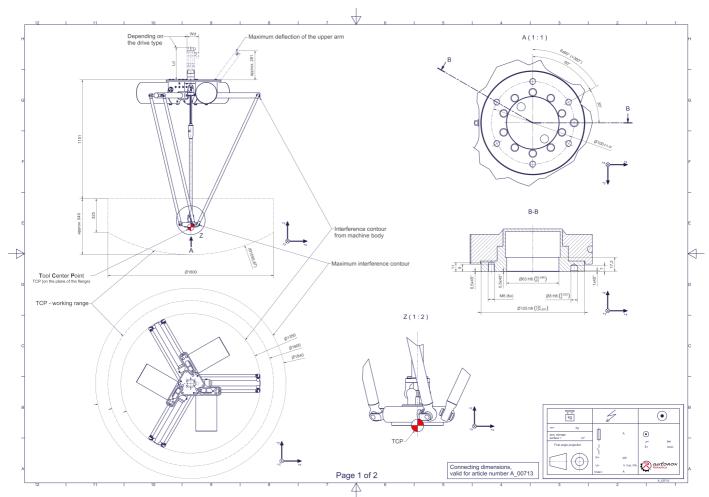

<u>Downloads:</u> <u>Connecting dimensions (PDF)</u> <u>3D model (STP)</u> <u>3D model (PDF)</u>



Product data sheet https://autonoxfinder.com/en/A_00713-FO

Date of download: Oct 30, 2025 Time of download: 12:46 UTC

Technical specifications:

Field of application	Hygienic 'HHD'
Kinematics	Parallel
Translatory Degrees of Freedom (X,Y,Z)	3
Rotational Degrees of Freedom (α,β,γ)	1
Nominal payload [kg lbs]*	6 13.2
Working area-diameter [mm in]	1600 63.0
Working height outside [mm in]	325 12.8
Working height center [mm in]	540 21.3
Max. acceleration torque of the rotation y around Z at the output [Nm in.lbs]	28 247.8
Nominal torque of the rotation γ around Z at the output [Nm \mid in.lbs]	15,2 134.5
Max. speed of the rotation y around Z at the output [1/min]	500
Nominal speed of the rotation y around Z at the output [1/min]	430
Bearing type of the telescopic shaft(s)	Roller bearing
Bearing type of the arm joints	Roller bearing
Lubricants of the bearings	Food-grade (FO)
Lubricants of the gearboxes	Food-grade (FO)
Cleaning	Up to 28 bar 406 psi high pressure
Protection class	IP69K
Ambient temperature [°C °F]	0 to +40 +32 to +104
Relative humidity level [%]	95 (free of condensation)
Mounting position	Ceiling, Wall (on request), Angle (on request)

^{*} All given values are nominal values (nominal payload referred to a nominal performance) and can vary under realworld conditions depending on the application (tool specifications, load distances, reduction (partly) of the nominal performance when using food-grade lubricants, ...). Please consider our technical data sheets regarding the load capacity.