
# HHD DELTA RLT4-1250-3kg




**Article number:** A_00876-FO

**Lubricant variant:** Food-grade lubricants (FO)

**Description:**
This type of robot is based on the principle of parallel kinematics. All drives are mounted in a fixed position on the robot head. Motor cables are not moved. The robot has three (3) translational and one (1) rotational degree(s) of freedom.

**Scope of delivery:**
Robot mechanics incl. gearbox, Servo motor adapter, Transport and packing instructions

**Connecting dimensions:**

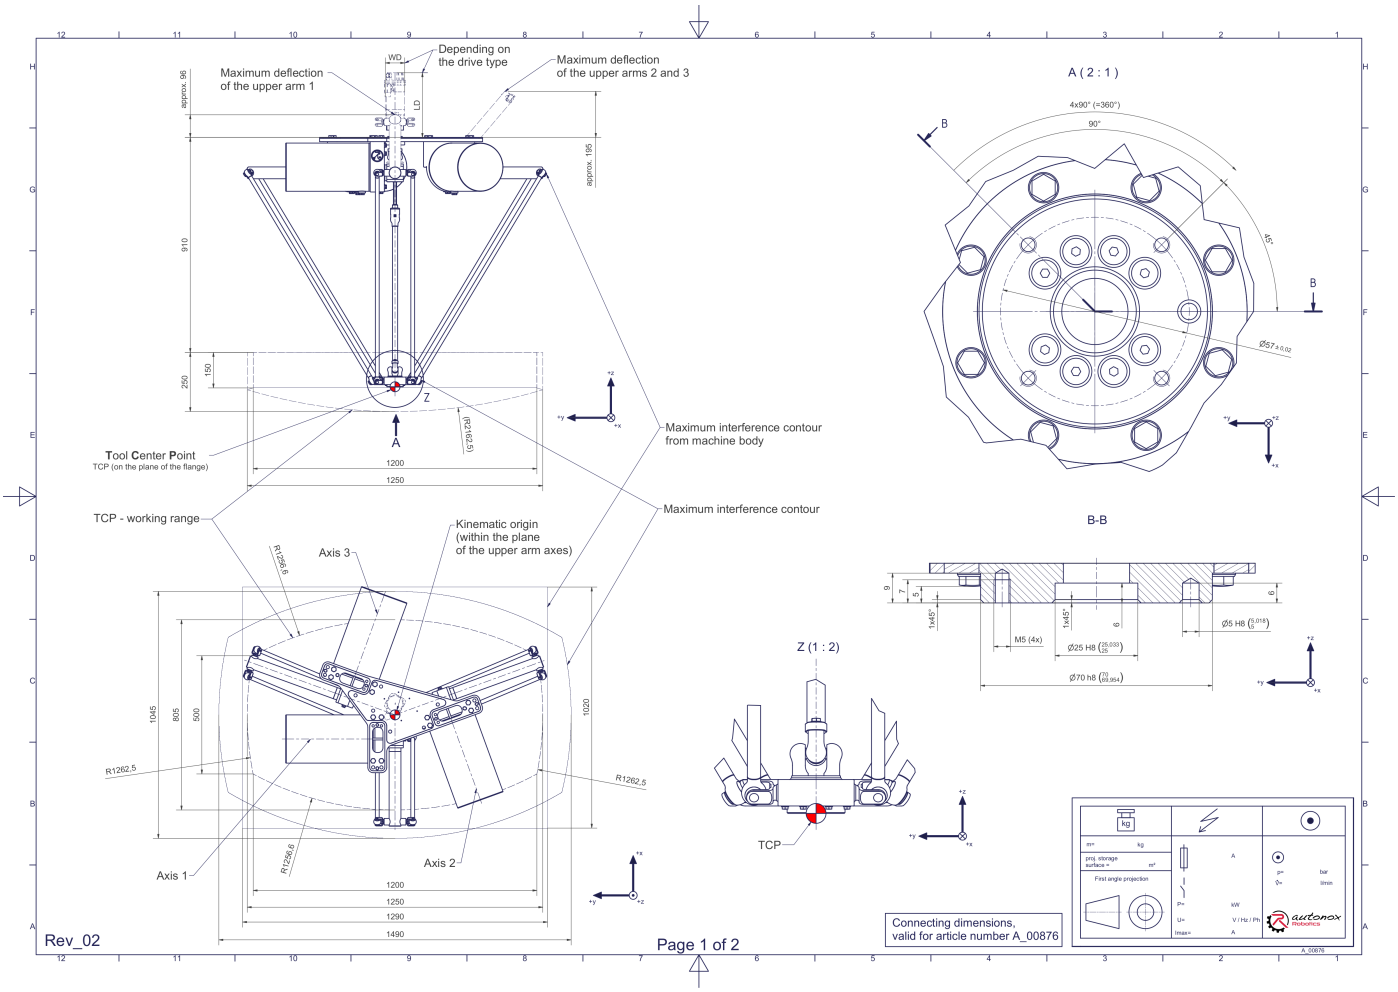


**Downloads:** Connecting dimensions (PDF) 3D model (STP) 3D model (PDF)

**We refer to our General Terms of Sale and Supply and Terms of Use.**

© 2026 autonox Robotics GmbH | www.autonox.com

## Technical specifications:

| | |
|---|---|
| **Field of application** | Hygienic 'HHD' |
| **Kinematics** | Parallel |
| **Translatory Degrees of Freedom (X,Y,Z)** | 3 |
| **Rotational Degrees of Freedom (α,ß,γ)** | 1 |
| **Nominal payload [kg\|lbs] *** | 3 \| 6.6 |
| **Working area-width X/Y [mm\|in]** | 805/1250 \| 31.7/49.2 |
| **Working height outside [mm\|in]** | 150 \| 5.9 |
| **Working height center [mm\|in]** | 250 \| 9.8 |
| **Max. acceleration torque of the rotation γ around Z at the output [Nm\|in.lbs]** | 6 \| 53.1 |
| **Nominal torque of the rotation γ around Z at the output [Nm\|in.lbs]** | 4,8 \| 42.5 |
| **Max. speed of the rotation γ around Z at the output [1/min]** | 800 |
| **Nominal speed of the rotation γ around Z at the output [1/min]** | 460 |
| **Bearing type of the telescopic shaft(s)** | Roller bearing |
| **Bearing type of the arm joints** | Roller bearing |
| **Lubricants of the bearings** | Food-grade (FO) |
| **Lubricants of the gearboxes** | Food-grade (FO) |
| **Cleaning** | Up to 28 bar \| 406 psi high pressure |
| **Protection class** | IP69K |
| **Ambient temperature [°C\|°F]** | 0 to +40 \| +32 to +104 |
| **Relative humidity level [%]** | 95 (free of condensation) |
| **Mounting position** | Ceiling, Wall (on request), Angle (on request) |

* All given values are nominal values (nominal payload referred to a nominal performance) and can vary under realworld conditions depending on the application (tool specifications, load distances, reduction (partly) of the nominal performance when using food-grade lubricants, ...). Please consider our technical data sheets regarding the load capacity.

**We refer to our General Terms of Sale and Supply and Terms of Use.**

© 2026 autonox Robotics GmbH | www.autonox.com