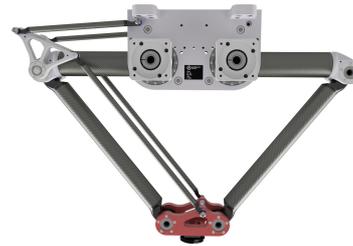# DuoPod RVS2-ATS-750-3kg

Article number: A_00911-ATS

**Lubricant variant:** Synthetic lubricants

Description:

This type of robot is based on the principle of parallel kinematics. All drives are mounted in a fixed position on the robot head. Motor cables are not moved. The robot has two (2) translational degrees of freedom.

Scope of delivery:

Robot mechanics incl. gearbox, Servo motor adapter, Threaded protection caps , Transport and packing instructions

Connecting dimensions:
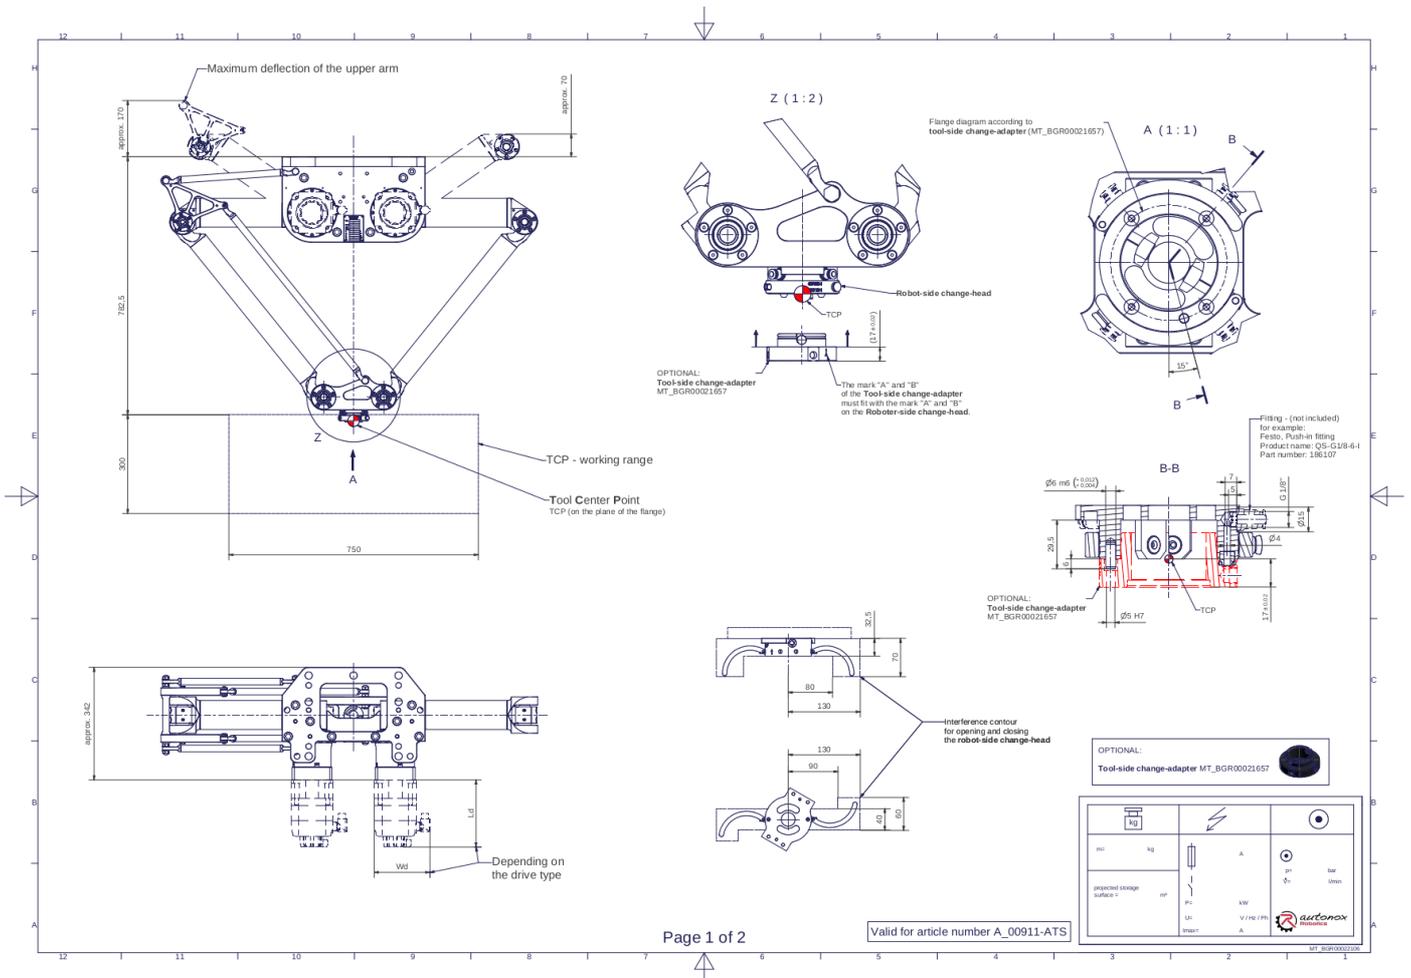
Downloads: Connecting dimensions (PDF)   3D model (STP)   3D model (PDF)

Product data sheet

https://autonoxfinder.com/en/A_00911-ATS

Technical specifications:

Field of application	Standard (not hygienic)
Kinematics	Parallel
Translatory Degrees of Freedom (X,Y,Z)	2
Rotational Degrees of Freedom (α,ß,γ)	0
Nominal payload [kg|lbs] *	3 | 6.6
Working area-width [mm|in]	750 | 29.5
Working height outside [mm|in]	300 | 11.8
Working height center [mm|in]	370 | 14.6
Manual tool changing system ATS	Fourfold media transmission (Compressed air 6 bar | 87.0 psi / vacuum -850 mbar | -12.3 psi / min. inner-Ø: 4 mm | 0.16 in)
Bearing type of the arm joints	Roller bearing
Lubricants of the gearboxes	Synthetic
Cleaning	No high pressure
Ambient temperature [°C|°F]	0 to +40 | +32 to +104
Relative humidity level [%]	95 (free of condensation)
Mounting position	Floor, Ceiling, Wall (on request), Angle (on request)
Robot weight without drive engineering (esp. drive) [kg|lbs]	50 | 110.2

* All given values are nominal values (nominal payload referred to a nominal performance) and can vary under realworld conditions depending on the application (tool specifications, load distances, reduction (partly) of the nominal performance when using food-grade lubricants, ...). Please consider our technical data sheets regarding the load capacity.

Gearbox article number for this robot mechanics:

Function	Article number	Document
Drive of the upper arms	MT_BGR00020777-U-xx	Operating manual gearbox type 3 (PDF)