

## DELTA RLZ3-TS1-ATS-1200-3kg

Article number: A\_01001-0-TS1-ATS


Lubricant variant: Synthetic lubricants



### Description:

This type of robot is based on the principle of parallel kinematics. All drives are mounted in a fixed position on the robot head. Motor cables are not moved. The robot has three (3) translational degrees of freedom. **Technical note** This specialized robotic design significantly increases the available working height. However, please note that, especially at high performance levels, more advanced control requirements and expertise are necessary. Consult your control systems partner. **Scope of delivery** Robot mechanics incl. gearbox, Servo motor adapter, Threaded protection caps, Transport and packing instructions

### Connecting dimensions:

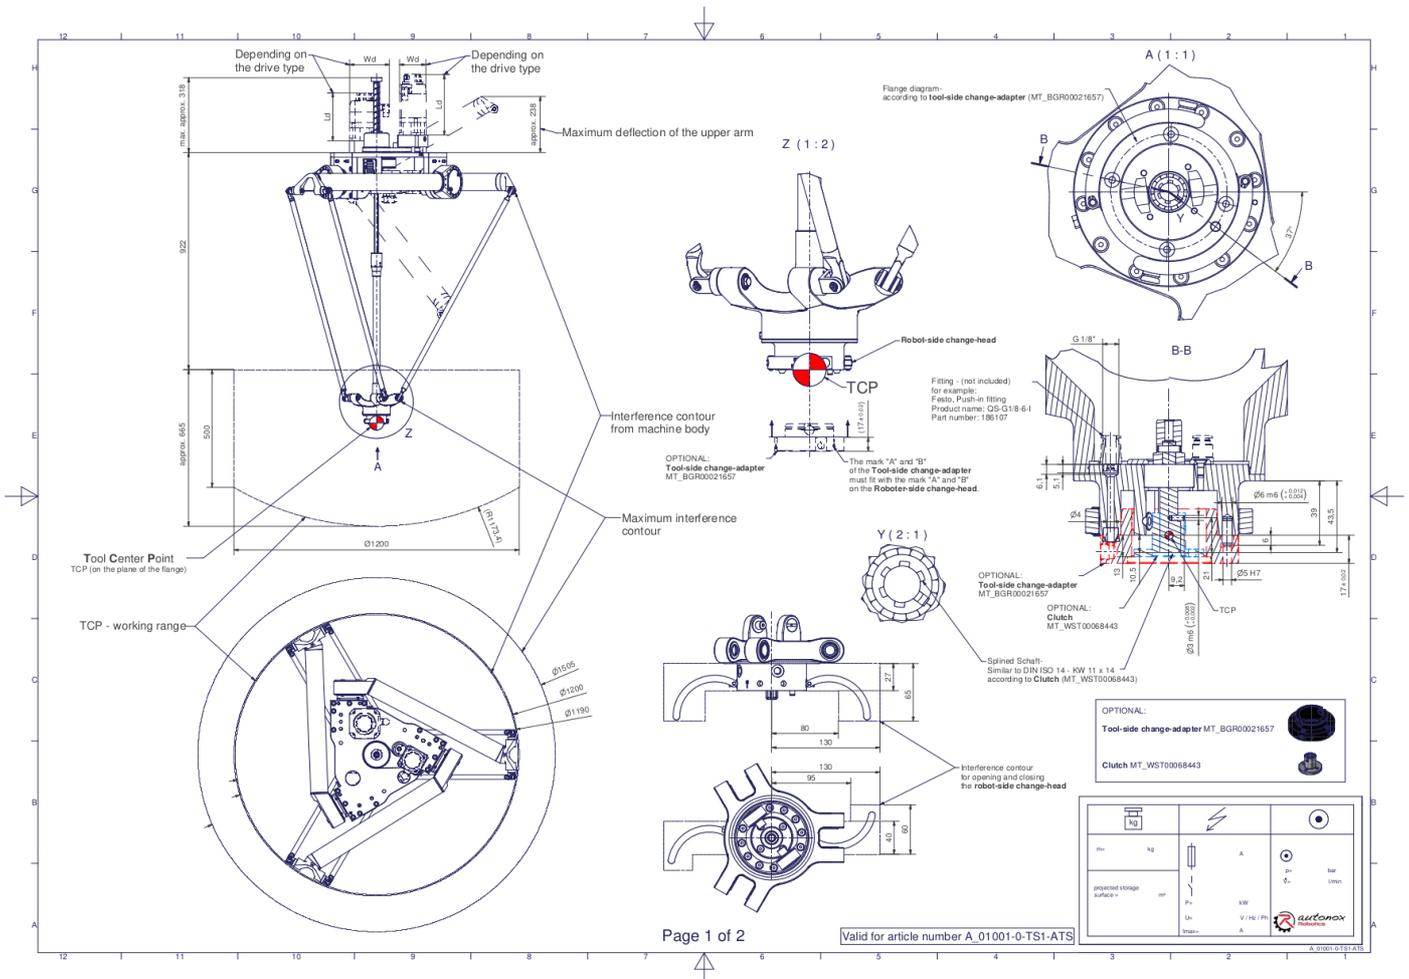

**Downloads:** [Connecting dimensions \(PDF\)](#), [3D model \(STP\)](#), [3D model \(PDF\)](#)

We refer to our [General Terms of Sale and Supply](#) and [Terms of use](#).

## Technical specifications:

Field of application	Standard (not hygienic)
Kinematics	Parallel
Translatory Degrees of Freedom (X,Y,Z)	3
Rotational Degrees of Freedom ( $\alpha,\beta,\gamma$ )	0
Nominal payload [kg   lbs] *	3   6.6
Working area-diameter [mm   in]	1200   47.2
Working height outside [mm   in]	500   19.7
Working height center [mm   in]	665   26.2
Length of the tool holder extension [mm   in]	0
Output type of the tool actuation	Shaft (TS)
Number of the tool actuation (telescopic shaft(s))	1
Manual tool changing system ATS	Fourfold media transmission (Compressed air 6 bar   87.0 psi / vacuum -850 mbar   -12.3 psi / min. inner- $\emptyset$ : 4 mm   0.16 in)
Max. acceleration torque of the tool actuation T/TS1 at the output [Nm   in.lbs]	27   239.0
Nominal torque of the tool actuation T/TS1 at the output [Nm   in.lbs]	27   239.0
Max. speed of the tool actuation T/TS1 at the output [1/min]	1000
Nominal speed of the tool actuation T/TS1 at the output [1/min]	1000
Bearing type of the telescopic shaft(s)	Roller bearing
Bearing type of the arm joints	Roller bearing
Lubricants of the gearboxes	Synthetic
Cleaning	No high pressure
Ambient temperature [ $^{\circ}\text{C}$   $^{\circ}\text{F}$ ]	0 to +40   +32 to +104
Relative humidity level [%]	95 (free of condensation)
Mounting position	Floor, Ceiling, Wall (on request), Angle (on request)

\* All given values are nominal values (nominal payload referred to a nominal performance) and can vary under realworld conditions depending on the application (tool specifications, load distances, reduction (partly) of the nominal performance when using food-grade lubricants, ...). Please consider our technical data sheets regarding the load capacity.